

Straight Blade Devices
 20A, 125V, 2 Pole, 3 Wire Grounding
 HBL® Extra Heavy Duty Specification
 Grade Duplex Receptacle

HUBBELL

Features

- Triangle marking on face indicates isolated ground
- Slender compact design
- Finder Groove Face

Ordering Information

| Description | Device Color | UPC | Catalog Number |
|---------------------------------------|--------------|--------------|----------------|
| Isolated ground, back and side wired. | Gray | 783585876870 | IG5362GY |

Listings

UL Listed to UL498 File No. E2186
 Certified to CSA, C22.2, No. 42 File 285
 Fed. Spec. WC596
 NEMA® WD-6 Compliant

Specifications

| | |
|-------------------------------|----------------------|
| Face | Nylon |
| Base | PBT |
| Contacts | 0.031" (0.8) Brass |
| Clamp | Nickel plated steel |
| Terminal Screws | Brass |
| Mounting Strap | .050 in. (1.3) Brass |
| Automatic Self-grounding Clip | Stainless steel |
| Mounting Screws | Zinc plated steel |

Performance

Electrical


| | |
|----------------------|--|
| Current Interrupting | Certified for current interrupting at full rated current |
| Dielectric Voltage | Withstands 2,000V minimum |

Mechanical

| | |
|-------------------------|--|
| Product Identification | Ratings are a permanent part of the device |
| Terminal Accommodation | #12-#10 AWG stranded or solid copper wire only |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA |

Environmental

| | |
|------------------------|---|
| Flammability | Top: UL 94V-2, Base: UL 94V-0 |
| Operating Temperatures | Maximum continuous 75°C; minimum -40°C (w/o impact) |

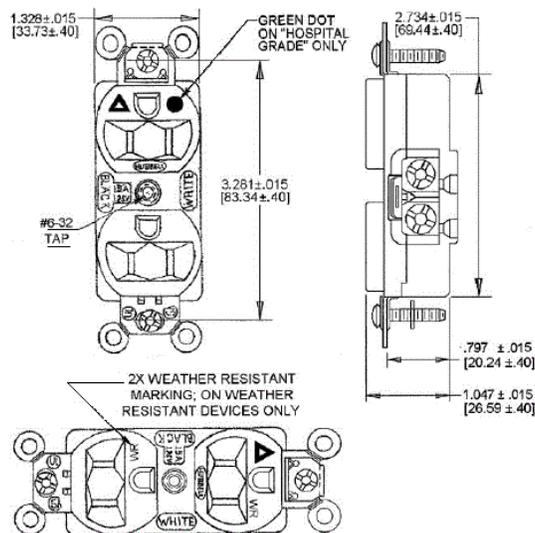

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

Customer Use Drawing
 eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

