SIEMENS

Data sheet

3RK1304-5KS40-2AA0



ET 200pro DSE HF DOL starter High Feature Mechanical switching Electronic overload protection AC-3, 0.9 kW / 400 V 0.15 A...2.00 A without brake contact 4 DI Han Q4/2 - Han Q8/0

Figure similar

product brand name	SIMATIC
product designation	Motor starters
design of the product	direct starter
product type designation	ET 200pro
General technical data	
product function on-site operation	Yes
insulation voltage rated value	400 V
degree of pollution	3
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation between main and auxiliary circuit	400 V
protection class IP	IP65
shock resistance	15g / 11 ms
vibration resistance	2g
mechanical service life (operating cycles) of the main contacts typical	30 000 000
type of assignment	1
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	05/01/2012
SVHC substance name	Lead - 7439-92-1 Lead monoxide (lead oxide) - 1317-36-8 Lead titanium zirconium oxide - 12626-81-2
Weight	1.684 kg
product function	
direct start	Yes
reverse starting	No
product component motor brake output	No
product feature	
 brake control with 230 V AC 	No
 brake control with 400 V AC 	No
 brake control with 24 V DC 	No
 brake control with 180 V DC 	No
brake control with 500 V DC	No
product function short circuit protection	Yes
design of short-circuit protection	fuse
maximum short-circuit current breaking capacity (Icu)	
at 400 V rated value	100 000 A
Safety related data	
proportion of dangerous failures	
 with low demand rate according to SN 31920 	50 %

- utilita da ma and de la colonia de la colo	75.0/
with high demand rate according to SN 31920 P10 and a part of the latest and a part of the state of the	75 %
B10 value with high demand rate according to SN 31920	1 000 000
failure rate [FIT] with low demand rate according to SN 31920	100 FIT
IEC 61508	
T1 value for proof test interval or service life according to IEC	20 a
61508	
Electrical Safety	
touch protection against electrical shock	finger-safe
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current- dependent overload release	0.15 2 A
type of the motor protection	solid-state
type of voltage	AC
operating voltage rated value	200 400 V
operating range relative to the operating voltage at AC at 50 Hz	200 440 V
operational current	
at AC at 400 V rated value	2 A
at AC-3 at 400 V rated value	2 A
operating power	000 W
at AC-3 at 400 V rated value	900 W
operating power for 3-phase motors at 400 V at 50 Hz	70 900 W
Inputs/ Outputs	
product function	Yes
digital inputs parameterizable digital outputs parameterizable	Yes No
digital outputs parameterizable number of digital inputs	NO 4
number of digital inputs number of sockets	•
for digital output signals	0
for digital output signals for digital input signals	4
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC	24 24 V
- 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1	
supply voltage 1 at DC rated value	
supply voltage 1 at DC rated value • minimum permissible	20.4 V
supply voltage 1 at DC rated valueminimum permissiblemaximum permissible	20.4 V 28.8 V
minimum permissible	
 minimum permissible maximum permissible	
minimum permissible maximum permissible Control circuit/ Control	28.8 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage	28.8 V DC
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value	28.8 V DC 20.4 28.8 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value	28.8 V DC 20.4 28.8 V 20.4 28.8 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC	28.8 V DC 20.4 28.8 V 20.4 28.8 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit	28.8 V DC 20.4 28.8 V 20.4 28.8 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF	DC 20.4 28.8 V 20.4 28.8 V 24 24 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit	28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit — without bypass circuit	28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit without bypass circuit in switching state ON	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit without bypass circuit in switching state ON — with bypass circuit	28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit without bypass circuit in switching state ON — with bypass circuit with bypass circuit — with bypass circuit	28.8 V DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit — without bypass circuit in switching state ON — with bypass circuit — without bypass circuit	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W 3.888 W
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit — without bypass circuit in switching state ON — with bypass circuit — without bypass circuit — without bypass circuit Installation/ mounting/ dimensions mounting position	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W 3.888 W
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit — with bypass circuit — without bypass circuit Installation/ mounting/ dimensions mounting position fastening method	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W vertical, horizontal screw fixing
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit mithout bypass circuit in switching state ON with bypass circuit without bypass circuit mithout bypass circuit mithout bypass circuit sin switching dimensions mounting position fastening method height width depth	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W 3.888 W vertical, horizontal screw fixing 230 mm
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit without bypass circuit in switching state ON with bypass circuit without bypass circuit Installation/ mounting/ dimensions mounting position fastening method height width	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W 3.888 W vertical, horizontal screw fixing 230 mm 110 mm
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit mithout bypass circuit in switching state ON with bypass circuit without bypass circuit mithout bypass circuit mithout bypass circuit sin switching dimensions mounting position fastening method height width depth	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W 3.888 W vertical, horizontal screw fixing 230 mm 110 mm
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF with bypass circuit without bypass circuit in switching state ON with bypass circuit without bypass circuit mithout bypass circuit mounting tomensions mounting position fastening method height width depth Ambient conditions	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W 3.888 W vertical, horizontal screw fixing 230 mm 110 mm 150 mm
minimum permissible maximum permissible Control circuit/ Control type of voltage of the control supply voltage control supply voltage at DC rated value control supply voltage 1 at DC rated value control supply voltage 1 at DC power loss [W] in auxiliary and control circuit in switching state OFF — with bypass circuit — without bypass circuit • in switching state ON — with bypass circuit — without bypass circuit Installation/ mounting/ dimensions mounting position fastening method height width depth Ambient conditions installation altitude at height above sea level maximum	DC 20.4 28.8 V 20.4 28.8 V 24 24 V 1.6416 W 1.6416 W 3.888 W 3.888 W vertical, horizontal screw fixing 230 mm 110 mm 150 mm

during transport	-40 +70 °C
relative humidity during operation	5 95 %
Communication/ Protocol	
protocol is supported	
PROFIBUS DP protocol	Yes
PROFINET protocol	Yes
design of the interface PROFINET protocol	Yes
product function bus communication	Yes
protocol is supported AS-Interface protocol	No
product function	
 supports PROFlenergy measured values 	Yes
supports PROFlenergy shutdown	Yes
address space memory of address range	
of the inputs	2 byte
of the outputs	2 byte
type of electrical connection of the communication interface	via backplane bus
Connections/ Terminals	
type of electrical connection	
for main current circuit	tab terminals
type of electrical connection	
1 for digital input signals	M12 socket
 2 for digital input signals 	M12 socket
 3 for digital input signals 	M12 socket
4 for digital input signals	M12 socket
type of electrical connection	
 at the manufacturer-specific device interface 	optical interface
 for main energy infeed 	socket according to ISO23570
 for load-side outgoing feeder 	socket according to ISO23570
 for main energy transmission 	socket according to ISO23570
 for supply voltage line-side 	via backplane bus
 for supply voltage transmission 	via backplane bus
UL/CSA ratings	
operating voltage at AC at 60 Hz according to CSA and UL rated value	600 V
Approvals Certificates	

General Product Approval







Confirmation





EMV **Test Certificates** Dangerous goods **Environment** other



Type Test Certificates/Test Report

Confirmation

Transport Information

Environmental Con**firmations**

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RK1304-5KS40-2AA0

Cax online generator


 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RK1304-5KS40-2AA0}$


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RK1304-5KS40-2AA0

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RK1304-5KS40-2AA0&lang=en

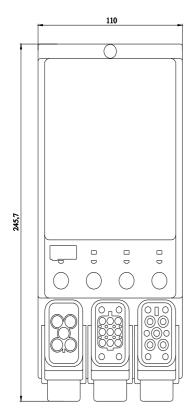

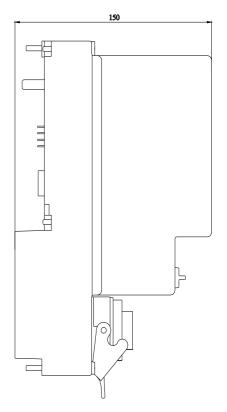

last modified: 3/11/2024 🖸