




MILBANK
ENERGY AT WORK

U2874-XT-QG-AMS

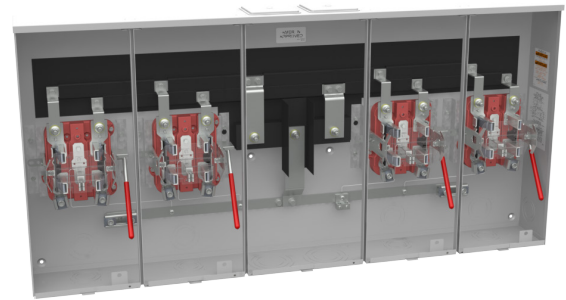

Catalog Number	U2874-XT-QG-AMS
Marketing Product Description	5 Terminal Ringless 2 Large Closing Plates Quadplex Ground Lever Bypass 4 Position Ameren
UPC	784572721692
Length (IN)	6
Width (IN)	52.25
Height (IN)	25
Brand Name	Milbank
Type	Ringless Meter Socket
Special Features	Ameren Energy
Application	Meter Socket
Standard	UL Listed;Type 3R
Voltage Rating	600 Volts Alternating Current
Amperage Rating	200 Continuous Ampere
Phase	1 Phase
Frequency Rating	60 Hertz
Size	6L x 52.25W x25H
Number Of Cutouts	0
Cutout Size	No Main Breaker
Cable Entry	Overhead or Underground with Center Wireway
Terminal	3/8 Inch Stud

Insulation	Glass Polyester
Mounting	Surface Mount
Enclosure	G90 Galvanized Steel with Powder Coat Finish
Jaw Quantity	5 Terminal
Bypass Type	Lever Bypass
Number of Meter Positions	4 Positions
Equipment Ground	Quadplex Ground
Hub Opening	Twin Large Closing Plates
Load Side Wire Range	6 AWG - 350 kcmil
Number Of Receptacles	0

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.