




# BDBLCS6V3, 3-Pole Flex Rated Power Distribution Block

By Burndy  
Catalog # [BDBLCS6V3](#)

Distribution block, Three pole Open Style 4 AWG-500 Kcmil (Run), Tap 4 AWG-500 Kcmil (Tap).

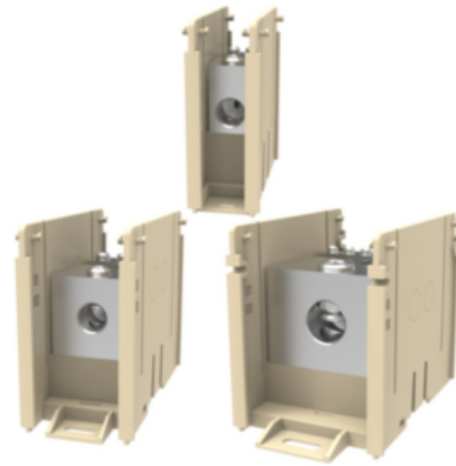

## Application

VERSI-POLE Power Distribution Blocks are designed to provide modular solutions to power distribution applications.

## General

Connector Type	Power Distribution Block
EU RoHS Indicator	Yes
Insulation	Y
Material	Aluminum
Number Of Poles	3
Plated	Y
Plating Type	Tin
Sub Brand	VERSIPOLE
Temperature Rating	194° F
Trade Name	VERSIPOLE™
Type	BDB
UPC	781810676202
UPC 12 Digit	7818106762022

## Dimensions

Dimension - Height inch	4.15
Dimension - L Length Overall mm	231
Dimension - Length Overall inch	9.09

## Electrical Ratings

Amperage Rating	760 A
Rating - Minimum Voltage	600
Voltage - Maximum	600 V

## Conductor Related

Conductor - AL Str Run Range	4 AWG - 500 kcmil
Conductor - AL Str Tap Range	4 AWG - 500 kcmil
Conductor - Copper Str Run Range	4 AWG - 500 kcmil
Conductor - Copper Str Tap Range	4 AWG - 500 kcmil
Conductor Type	<ul style="list-style-type: none"><li>• AL C Str-Run</li><li>• CU C Str-Run</li><li>• AL C Str-Tap</li><li>• CU C Str-Tap</li></ul>

## Certifications and Compliance

Certification - CSA Approved	No
Certification - cULus	Yes
Standards - RoHS Compliance Status	CM

## Logistics

Carton Quantity	2
Minimum Pack Quantity	1
Pallet Quantity	144

## Product Assets

[Customer Notices - Prop 65 Notice](#)  
[Sales Drawings - 50059695](#)



A proud member of the Hubbell Family.

©2023 Hubbell Incorporated. All rights reserved.  
BRDY-BDBLCS6V3-SPEC-EN | REV 8/2023