




**MILBANK**<sup>®</sup>  
ENERGY AT WORK

## U2852-X

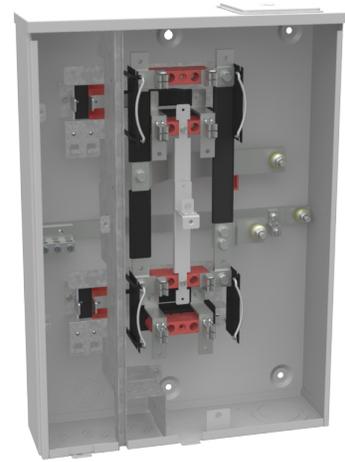

<b>Catalog Number</b>	U2852-X	<b>Mounting</b>	Surface Mount
<b>Marketing Product Description</b>	4 Terminal Ringless Large Closing Plate 2 Position 2-125 Ampere Main Breaker Provision	<b>Enclosure</b>	G90 Galvanized Steel with Powder Coat Finish
<b>UPC</b>	784572136014	<b>Jaw Quantity</b>	4 Terminal
<b>Length (IN)</b>	4.844	<b>Bypass Type</b>	No Bypass
<b>Width (IN)</b>	18	<b>Number of Meter Positions</b>	2 Positions
<b>Height (IN)</b>	25	<b>Equipment Ground</b>	Ground Lug
<b>Brand Name</b>	Milbank	<b>Hub Opening</b>	Large Closing Plate
<b>Type</b>	Ringless Meter Socket	<b>Number Branch Circuits</b>	2
<b>Application</b>	Meter Socket	<b>Number Of Receptacles</b>	0
<b>Standard</b>	UL Listed;Type 3R		
<b>Voltage Rating</b>	Up to 240 Volts Alternating Current		
<b>Amperage Rating</b>	125 Continuous Ampere		
<b>Phase</b>	1 Phase		
<b>Frequency Rating</b>	60 Hertz		
<b>Size</b>	4.844L x 18W x25H		
<b>Number Of Cutouts</b>	0		
<b>Cutout Size</b>	Breaker Provision		
<b>Cable Entry</b>	Overhead or Underground		
<b>Terminal</b>	3/8 Inch Stud		
<b>Insulation</b>	Glass Polyester		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.