



The versatile, low-cost, low-profile wall pack. BRISK™ - efficient and affordable LED light.

Color: Bronze

Weight: 4.2 lbs

Project:

Type:

Prepared By:

Date:

#### Driver Info

Type	Constant Current	Watts	22W
120V	0.17A	Color Temp	5000K (Cool)
208V	0.11A	Color Accuracy	74 CRI
240V	0.10A	L70 Lifespan	60,000 Hours
277V	0.08A	Lumens	3,460 lm
Input Watts	20.1W	Efficacy	172.1 lm/W

#### LED Info

Type	Constant Current	Watts	22W
120V	0.17A	Color Temp	5000K (Cool)
208V	0.11A	Color Accuracy	74 CRI
240V	0.10A	L70 Lifespan	60,000 Hours
277V	0.08A	Lumens	3,460 lm
Input Watts	20.1W	Efficacy	172.1 lm/W

## Technical Specifications

### Compliance

#### UL Listed:

Suitable for wet locations

#### IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

#### IP Rating:

Ingress protection rating of IP66 for dust and water

### Performance

#### Lifespan:

60,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

#### Wattage Equivalency:

Equivalent to 100W Metal Halide or 100W HPS

### LED Characteristics

#### LEDs:

Long-life, high-efficacy, surface-mount LEDs

#### Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

### Electrical

#### Driver:

Constant Current, Class 2, 50/60Hz, 120V: 0.17A, 208V: 0.11A, 240V: 0.10A, 277V: 0.08A

#### THD:

9.24% at 120V, 17.87% at 277V

#### Power Factor:

99.5% at 120V, 90.4% at 277V

#### Surge Protection:

2kV

### Optical

#### BUG Rating:

B1 U3 G2

### Construction

#### Maximum Ambient Temperature:

Suitable for use in up to 40°C (104°F)

#### Cold Weather Starting:

The minimum starting temperature is -40°C (-40°F)

#### Housing:

Precision die-cast aluminum

#### Reflector:

Specular

#### Lens:

Diffused acrylic

#### Mounting:

Heavy duty, die-cast junction box with four (4) conduit entries (one top, two side, one back)

#### Gaskets:

Silicone foam

#### Finish:

Formulated for high durability and long-lasting color

#### Green Technology:

Mercury and UV free. RoHS-compliant components.

### Other


#### 5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

#### Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

## Dimensions

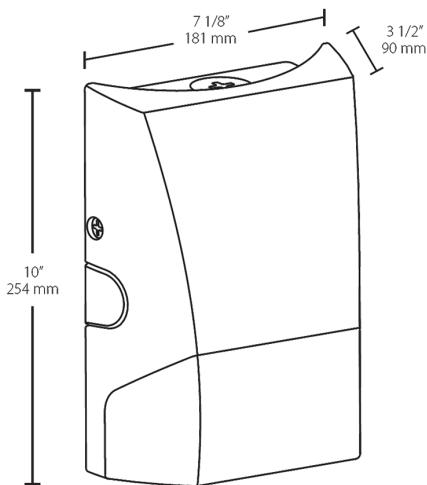

## Features

Economical  
Traditional non-cutoff design  
60,000-hour LED lifespan  
5-Year, limited warranty

## Ordering Matrix

Family	Lumen Package/Wattage	CCT/CRI	Finish	Options
BRISK	M32L			
S11L = 1100lm / 9W		Blank = 5000K Cool / 70 CRI		Blank = No Option
S17L = 1700lm / 14W		740 = 4000K Neutral / 70 CRI	Blank = Bronze	/PCU = 120-277V Photocell
M32L = 3200lm / 22W		730 = 3000K Warm / 70 CRI	W = White	
M48L = 4800lm / 35W				