

Switched Disconnects and Enclosures

Circuit-Lock[®] NEMA 3 and 3R Enclosures with Switch,
30A 3-Pole

HUBBELL

- Features
- Non-metallic enclosure
 - Ideal for use on outdoor equipment

Ordering Information

Description	UPC Number	Catalog Number
HBL7810D in NEMA 3R non-metallic enclosure, Ideal for use on outdoor equipment	783585680965	HBL13R23



- Listings
- UL 508
 - CSA-C22.2 No.14

Specifications


Enclosure Material	Thermoplastic
Water Ingress	3

Performance

Electrical	
Dielectric Voltage	2,200V AC minimum for 1 minute
Electrical Life	Min. 6,000 Cycles at rated switch load
Max. Working Voltage	600V AC RMS
Short Circuit Current Ratings (SCCR): (Motor Disconnect)	60A max. when protected by J fuses

Mechanical	
Mechanical Life	10,000 minimum cycles
Terminal Accommodations	#10 AWG Max.
Wire Type	Solid and stranded copper wire only

Environmental	
Flammability	UL94HB/VO
Operating Temperature	Max. Continuous: 75°C; Min. Continuous: -40°C without impact

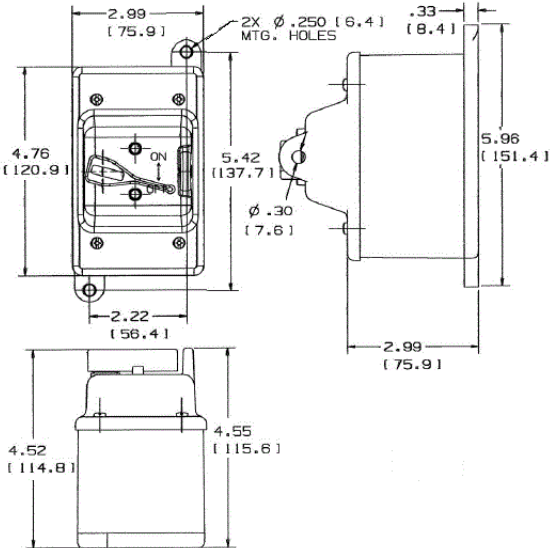

Online Resources

- Customer Use Drawing
- eCatalog
- Installation Instructions

