
PANDUCT® Type G — Slotted Wall Wiring Duct

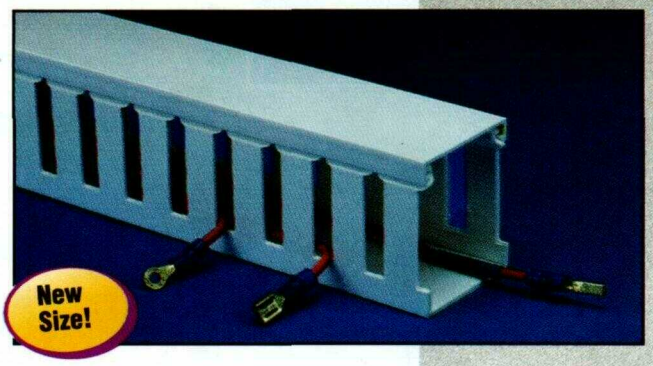

Type G Slotted Wall Wiring Duct


- Made of rigid PVC (See pg. 41 for material specifications)
- Rated for continuous use temperatures up to 50°C (122°F)
- U.L. Flammability Rating: V-0
- Available in a variety of colors as a standard part
- Provided with standard mounting holes (See page 35 for dimensions)
- Available with adhesive backing* (See page 25 for details)

Type G— Wiring Duct Standard Colors:

LG	DG	WH
Light Gray	Dark Gray	White

BL	IB
Black	Intrinsic Blue

Colors shown are approximate.



Duct Part Number	Duct External Dimensions		Cover Part Number	Duct Std. Ctn. Qty.	Cover Std. Ctn. Qty.	Std. Lgth.
	WxH In.	WxH (mm)				
G.5X.5LG6	0.69 x .56	(17.5) x (14.2)		120 ft.	120 ft.	
G.5X1LG6	0.69 x 1.09	(17.5) x (27.1)	C.5LG6	120 ft.	120 ft.	6 ft.
✔ G.5X4LG6	0.69 x 4.10	(17.5) x (104.0)		120 ft.	120 ft.	
G.75X.75LG6	0.94 x 0.83	(23.9) x (21.0)		120 ft.	120 ft.	
G.75X1LG6	0.94 x 1.09	(23.9) x (27.1)	C.75LG6	120 ft.	120 ft.	6 ft.
G.75X1.5LG6	0.94 x 1.58	(23.9) x (40.0)		120 ft.	120 ft.	
G.75X2LG6	0.94 x 2.09	(23.9) x (53.0)		120 ft.	120 ft.	
G1X1LG6	1.25 x 1.09	(31.8) x (27.1)		120 ft.	120 ft.	
G1X1.5LG6	1.25 x 1.59	(31.8) x (40.3)		120 ft.	120 ft.	
G1X2LG6	1.25 x 2.09	(31.8) x (53.0)	C1LG6	120 ft.	120 ft.	6 ft.
G1X3LG6	1.25 x 3.10	(31.8) x (78.6)		120 ft.	120 ft.	
G1X4LG6	1.25 x 4.10	(31.8) x (104.0)		60 ft.	120 ft.	
G1.5X1 LG6	1.75 x 1.09	(44.5) x (27.1)		120 ft.	120 ft.	
G1.5X1.5LG6	1.75 x 1.59	(44.5) x (40.3)		120 ft.	120 ft.	
G1.5X2LG6	1.75 x 2.09	(44.5) x (53.0)	C1.5LG6	120 ft.	120 ft.	6 ft.
G1.5X3LG6	1.75 x 3.10	(44.5) x (78.6)		120 ft.	120 ft.	
G1.5X4LG6	1.75 x 4.10	(44.5) x (104.0)		60 ft.	120 ft.	
G2X1 LG6	2.25 x 1.09	(57.2) x (27.1)		120 ft.	120 ft.	
G2X1.5LG6	2.25 x 1.59	(57.2) x (40.3)		120 ft.	120 ft.	
G2X2LG6	2.25 x 2.09	(57.2) x (53.0)	C2LG6	120 ft.	120 ft.	6 ft.
G2X3LG6	2.25 x 3.10	(57.2) x (78.6)		60 ft.	120 ft.	
G2X4LG6	2.25 x 4.10	(57.2) x (104.0)		60 ft.	120 ft.	
G2X5LG6	2.25 x 5.11	(57.2) x (129.7)		60 ft.	120 ft.	
G2.5X3LG6	2.75 x 3.12	(69.9) x (79.2)	C2.5LG6	60 ft.	120 ft.	6 ft.
G3X1LG6	3.25 x 1.09	(82.6) x (27.6)		120 ft.	120 ft.	
G3X2LG6	3.25 x 2.09	(82.6) x (53.0)		120 ft.	120 ft.	
G3X3LG6	3.25 x 3.10	(82.6) x (78.6)	C3LG6	60 ft.	120 ft.	6 ft.
G3X4LG6	3.25 x 4.10	(82.6) x (104.0)		60 ft.	120 ft.	
G3X5LG6	3.25 x 5.11	(82.6) x (129.7)		60 ft.	120 ft.	
G4X1.5LG6	4.25 x 1.58	(108.0) x (40.0)		60 ft.	120 ft.	
G4X2LG6	4.25 x 2.09	(108.0) x (53.0)		60 ft.	120 ft.	
G4X3LG6	4.25 x 3.10	(108.0) x (78.6)	C4LG6	60 ft.	120 ft.	6 ft.
G4X4LG6	4.25 x 4.10	(108.0) x (104.0)		60 ft.	120 ft.	
G4X5LG6	4.25 x 5.11	(108.0) x (129.7)		60 ft.	120 ft.	
G6X4LG6	6.25 x 4.11	(158.8) x (104.4)	C6LG6	60 ft.	120 ft.	6 ft.


*Adhesive tape is not CSA Certified.
See page 35 for complete listing of dimensions. ✔=New Size

Ordering Information:

- Order number of feet required in multiples of 6 ft or Std. Carton quantities.
- To order with pressure-sensitive adhesive mounting tape applied, add -A to Part Number.
- Part Number shown for Light Gray LG. For other color availability see chart, page 43.

Part Number Nomenclature —

G	.5	X	.5	LG	6
type/style	nominal width (in)		nominal height (in)	color	length (ft)

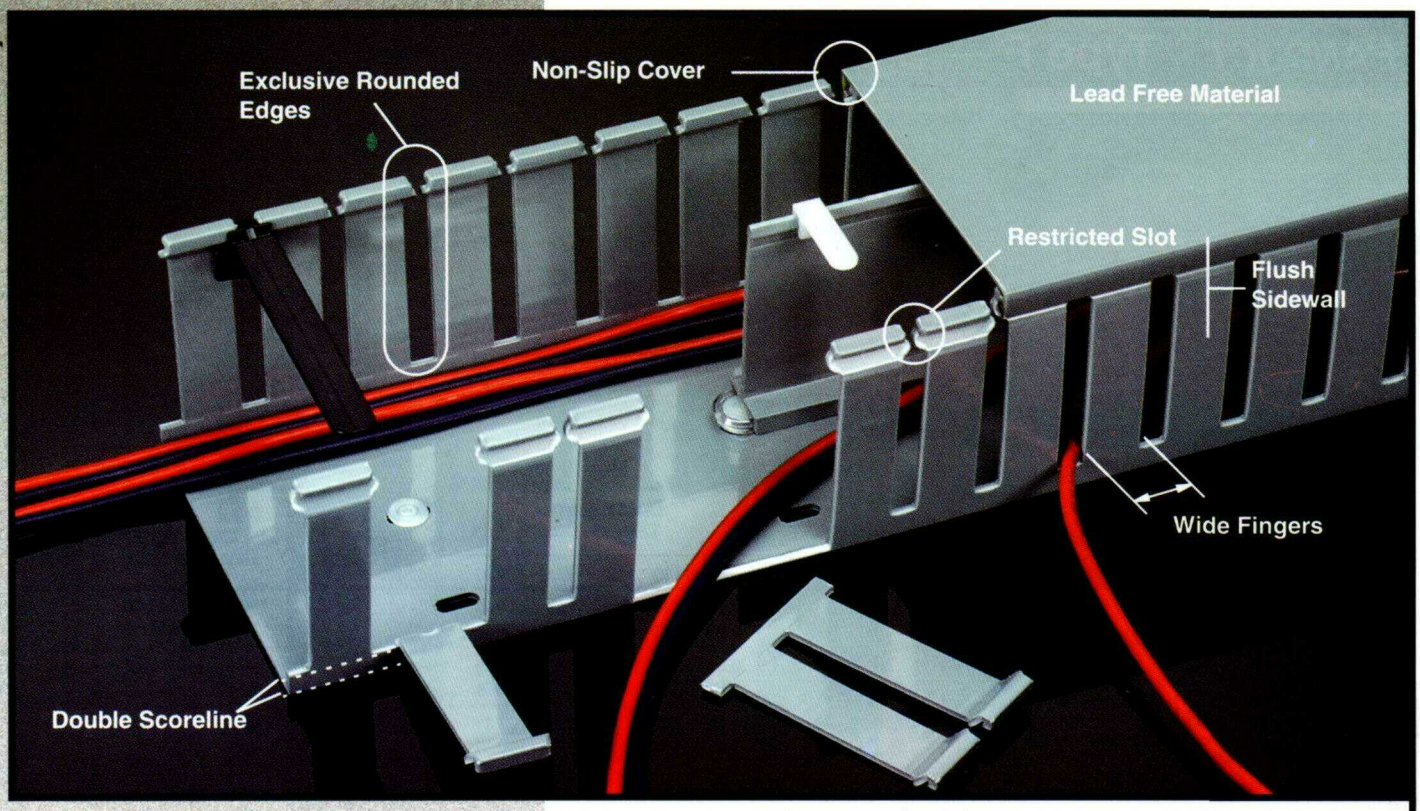

Type G Slotted Wall Wiring Duct

Choose from **35** sizes of *PANDUIT*® Type G Wiring Duct; from **0.5" x 0.5" up to 6" x 4"**. Used for general purpose control panel wiring and to route and protect wiring in communication closets. The non-slip cover conceals all wiring and is easy to install. The duct and cover form a flush sidewall providing increased capacity and improved aesthetics.

Accessories

Duct Cutting Tool **26**
Duct Finger Cutting Tool **26**
Duct Notching Tool **27**
Nylon Rivet Installation Tool **27**
Divider Walls **28**
Wire Retainers **29-30**
Mounting Bracket **33**
Labeling **34**

Features & Benefits

Wide Fingers
- Provide added support
- Same slot and finger width as Type E Duct

Cover Flush with Base
- Provides greater wire capacity
- Improves aesthetics

Restricted Slot Design
- Retains wire in slot
- Speeds installation
  —Simply deflect finger for fast, easy wire installation or removal

Optional Divider Walls
- Can create multiple channels within duct to separate wiring

Exclusive Rounded Edges Along Entire Slot
- Protect wires and hands from abrasion

Non-Slip Cover Design
- Incorporates integral high friction lining to inhibit cover movement


Easy Cover Removal
- Changes to wiring can be made quickly & easily

Double Scorelines
- Upper Scoreline:
  —Fingers break off leaving a smooth edge, without the use of a tool
- Lower Scoreline:
  —Fingers and sidewall break off flush with base for junctions. (Use DNT-100 Tool to cut side wall)

Bar Coded Part Number Label with QC Number
- Allows for automated inventory control systems
- Quick identification of loose piece wiring duct
- Complete quality traceability

Optional Pressure-Sensitive Adhesive Mounting Tape is Available

PANDUCT® Type FS — Solid Wall Raceway

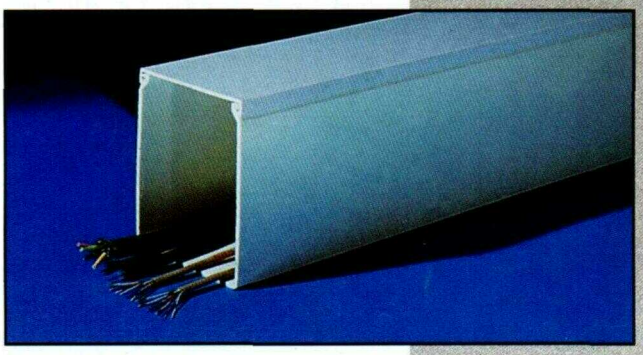

Type FS Solid Wall Raceway


- Made of rigid PVC (See pg. 41 for material specifications)
- Rated for continuous use temperatures up to 50°C (122°F)
- U.L. Flammability Rating: V-0
- Available in a variety of colors as a standard part
- Supplied without mounting holes
- Available with mounting holes (See ordering information below)
- Available with adhesive backing* (See page 25 for details)

Type FS— Wiring Duct Standard Colors:

LG	DG	WH
Light Gray	Dark Gray	White

BL	IB
Black	Intrinsic Blue

Colors shown are approximate.



Raceway Part Number	Raceway External Dimensions		Cover Part Number	Raceway Std. Ctn. Qty.	Cover Std. Ctn. Qty.	Std. Lgth.
	WxH In.	WxH (mm)				
FS.5X.5LG6NM	0.69 x 0.56	(17.5) x(14.2)	C.5LG6	120 ft.	120 ft.	6 ft.
FS.5X1LG6NM	0.69 x 1.09	(17.5) x (27.1)		120 ft.	120 ft.	
FS.75X.75LG6NM	0.94 x 0.83	(23.9) x (21.0)	C.75LG6	120 ft.	120 ft.	6 ft.
FS.75X1LG6NM	0.94 x 1.09	(23.9) x (27.1)		120 ft.	120 ft.	
FS.75X1.5LG6NM	0.94 x 1.58	(23.9) x (40.0)		120 ft.	120 ft.	
FS.75X2LG6NM	0.94 x 2.09	(23.9) x (53.0)		120 ft.	120 ft.	
FS1X1LG6NM	1.25 x 1.09	(31.8) x (27.1)	C1LG6	120 ft.	120 ft.	6 ft.
FS1X1.5LG6NM	1.25 x 1.59	(31.8) x (40.3)		120 ft.	120 ft.	
FS1X2LG6NM	1.25 x 2.09	(31.8) x (53.0)		120 ft.	120 ft.	
FS1X3LG6NM	1.25 x 3.10	(31.8) x (78.6)		120 ft.	120 ft.	
FS1X4LG6NM	1.25 x 4.10	(31.8) x (104.0)		60 ft.	120 ft.	
FS1.5X1 LG6NM	1.75 x 1.09	(44.5) x (27.1)	C1.5LG6	120 ft.	120 ft.	6 ft.
FS1.5X1.5LG6NM	1.75 x 1.59	(44.5) x (40.3)		120 ft.	120 ft.	
FS1.5X2LG6NM	1.75 x 2.09	(44.5) x (53.0)		120 ft.	120 ft.	
FS1.5X3LG6NM	1.75 x 3.10	(44.5) x (78.6)		120 ft.	120 ft.	
FS1.5X4LG6NM	1.75 x 4.10	(44.5) x (104.0)		60 ft.	120 ft.	
FS2X1 LG6NM	2.25 x 1.09	(57.2) x (27.1)	C2LG6	120 ft.	120 ft.	6 ft.
FS2X1.5LG6NM	2.25 x 1.59	(57.2) x (40.3)		120 ft.	120 ft.	
FS2X2LG6NM	2.25 x 2.09	(57.2) x (53.0)		120 ft.	120 ft.	
FS2X3LG6NM	2.25 x 3.10	(57.2) x (78.6)		60 ft.	120 ft.	
FS2X4LG6NM	2.25 x 4.10	(57.2) x (104.0)		60 ft.	120 ft.	
FS2X5LG6NM	2.25 x 5.11	(57.2) x (129.7)		60 ft.	120 ft.	
FS2.5X3LG6NM	2.75 x 3.12	(69.9) x (79.2)	C2.5LG6	60 ft.	120 ft.	6 ft.
FS3X1LG6NM	3.25 x 1.09	(82.6) x (27.6)	C3LG6	120 ft.	120 ft.	6 ft.
FS3X2LG6NM	3.25 x 2.09	(82.6) x (53.0)		120 ft.	120 ft.	
FS3X3LG6NM	3.25 x 3.10	(82.6) x (78.6)		60 ft.	120 ft.	
FS3X4LG6NM	3.25 x 4.10	(82.6) x (104.0)		60 ft.	120 ft.	
FS3X5LG6NM	3.25 x 5.11	(82.6) x (129.7)		60 ft.	120 ft.	
FS4X1.5LG6NM	4.25 x 1.58	(108.0) x (40.0)	C4LG6	60 ft.	120 ft.	6 ft.
FS4X2LG6NM	4.25 x 2.09	(108.0) x (53.0)		60 ft.	120 ft.	
FS4X3LG6NM	4.25 x 3.10	(108.0) x (78.6)		60 ft.	120 ft.	
FS4X4LG6NM	4.25 x 4.10	(108.0) x (104.0)		60 ft.	120 ft.	
FS4X5LG6NM	4.25 x 5.11	(108.0) x (129.7)				
FS6X4LG6NM	6.25 x 4.11	(158.8) x (104.4)	C6LG6	60 ft.	120 ft.	6 ft.


*Adhesive tape is not CSA Certified.
See page 36 for complete listing of dimensions.

Ordering Information:

- Order number of feet required in *multiples of 6 ft or Std. Carton* quantities.
- To order duct with mounting holes, delete NM from Part Number.
- To order with pressure-sensitive adhesive mounting tape applied, add -A to Part Number.
- Part Number shown for Light Gray LG. For other color availability see chart, page 43.

Part Number Nomenclature —

FS	.5	X	.5	LG	6	NM
type/style	nominal width (in)		nominal height (in)	color	length (ft)	no mounting holes

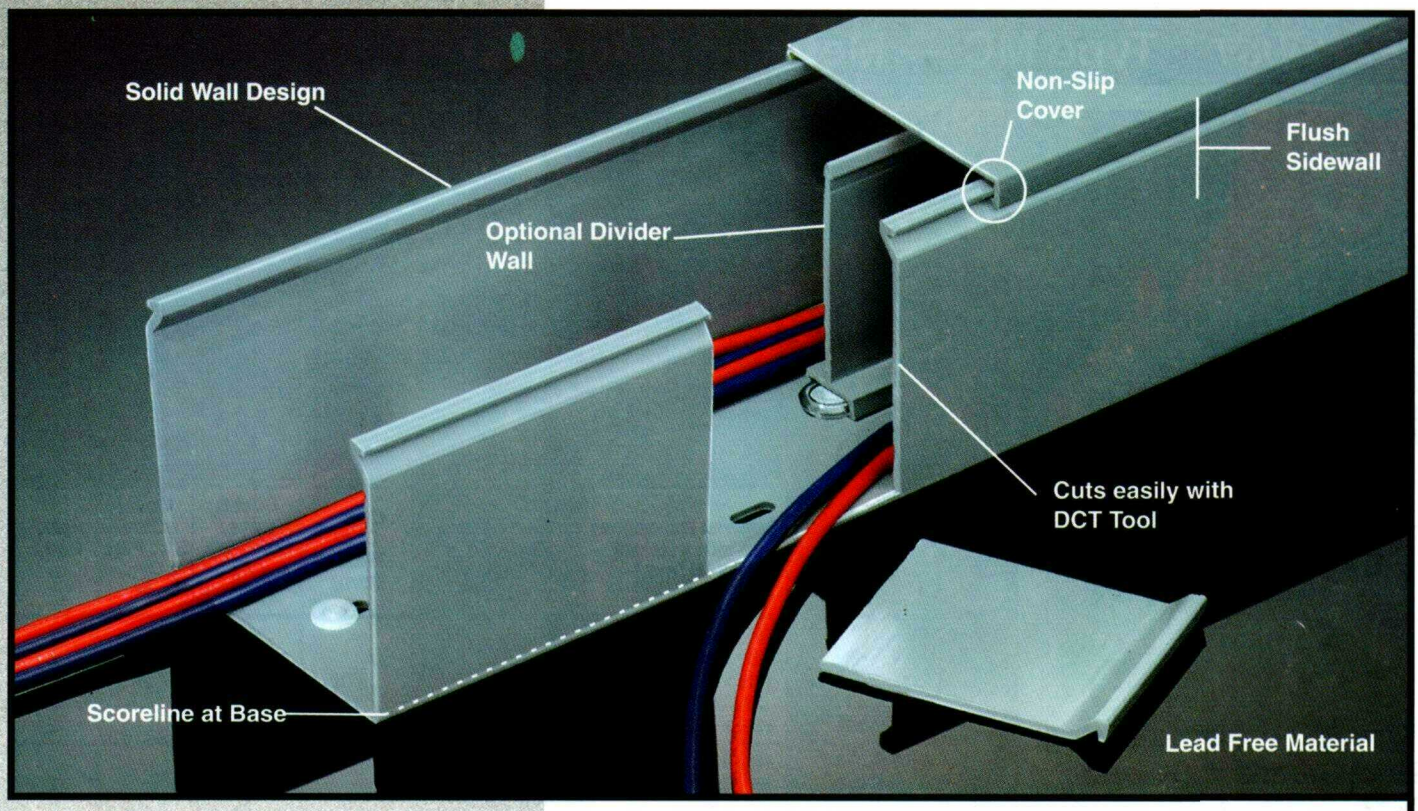

Type FS Solid Wall Raceway

Choose from **34** sizes of *PANDUIT*® Type FS Solid Wall Raceway from **.5" x .5" up to 6" x 4"**. The PVC material can be easily cut for breakouts and junctions. The non-slip cover keeps all wiring in place and is easy to install. The cover and base form a flush sidewall for increased capacity and improved aesthetics. It is excellent for use in non-plenum applications including under floor and telecommunication closet installations.

Accessories

Duct Cutting Tool **26**
Nylon Rivet Installation Tool **27**
Divider Walls **28**
Wire Retainers **29-30**
Mounting Bracket **33**
Labeling **34**

Features & Benefits

Solid Walls
- Provide maximum wire protection

Cover Flush With Base
- Improves aesthetics

Non-Slip Cover Design
- Incorporates integral high friction lining to inhibit cover movement

Optional Divider Wall
- Can create multiple channels within duct to separate wiring

Easy Cover Installation and Removal
- Changes to wiring can be made quickly & easily


Scoreline at Base of Wall
- Allows for a breakout which is flush with base of the duct

Optional Mounting Holes
- Available with the same mounting hole pattern as Type F Duct

Bar Coded Part Number Label with QC Number
- Allows for automated inventory control systems
- Quick identification of loose piece duct
- Complete quality traceability

Optional Pressure-Sensitive Adhesive Mounting Tape is Available

PANDUCT® Type E — Slotted Wall Wiring Duct

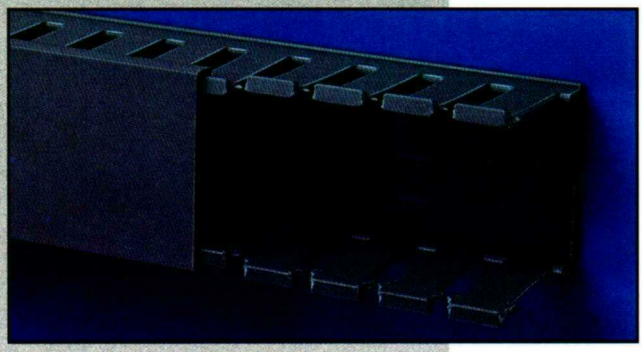

Type E Slotted Wall Wiring Duct


- Made of rigid PVC (See pg. 41 for material specifications)
- Rated for continuous use temperatures up to 50°C (122°F)
- Available in a variety of colors as a standard part (See page 43 for details)
- Provided with standard mounting holes (See page 38 for dimensions)
- Available with adhesive backing* (See page 25 for details)

Type E— Wiring Duct Standard Colors:

LG	DG	WH
Light Gray	Dark Gray	White

BL	IB
Black	Intrinsic Blue

Colors shown are approximate.



Duct Part Number	Duct External Dimensions		Cover Part Number	Duct Std. Carton Qty.	Cover Std. Carton Qty.	Std. Lgth.
	WxH In.	WxH (mm)				
E.5X.5LG6	0.63 x 0.56	(16.0) x (14.2)	C.5LG6	120 ft.	120 ft.	6 ft.
E.5X.62LG6	0.63 x 0.68	(16.0) x (17.3)		120 ft.	120 ft.	
E.5X1LG6	0.63 x 1.06	(16.0) x (26.9)		120 ft.	120 ft.	
E.5X1.25LG6	0.63 x 1.31	(16.0) x (33.3)		120 ft.	120 ft.	
E.5X1.75LG6	0.63 x 1.81	(16.0) x (46.0)		120 ft.	120 ft.	
E.5X2LG6	0.63 x 2.06	(16.0) x (52.3)		120 ft.	120 ft.	
E.75X.75LG6	0.88 x 0.81	(22.4) x (20.6)	C.75LG6	120 ft.	120 ft.	6 ft.
E.75X1LG6	0.88 x 1.06	(22.4) x (26.9)		120 ft.	120 ft.	
E.75X1.5LG6	0.88 x 1.56	(22.4) x (39.6)		120 ft.	120 ft.	
E.75X2LG6	0.88 x 2.12	(22.4) x (53.8)		120 ft.	120 ft.	
E1X1LG6	1.14 x 1.12	(29.0) x (28.4)	C1LG6	120 ft.	120 ft.	6 ft.
E1X1.25LG6	1.14 x 1.37	(29.0) x (34.8)		120 ft.	120 ft.	
E1X1.5LG6	1.14 x 1.62	(29.0) x (41.1)		120 ft.	120 ft.	
E1X2LG6	1.14 x 2.12	(29.0) x (53.8)		120 ft.	120 ft.	
E1X2.5LG6	1.14 x 2.62	(29.0) x (66.5)		120 ft.	120 ft.	
E1X3LG6	1.14 x 3.12	(29.0) x (79.2)		120 ft.	120 ft.	
E1X4LG6	1.14 x 4.12	(29.0) x (104.6)		120 ft.	120 ft.	
E1.5X1 LG6	1.64 x 1.12	(41.7) x (28.4)	C1.5LG6	120 ft.	120 ft.	6 ft.
E1.5X1.5LG6	1.64 x 1.62	(41.7) x (41.1)		120 ft.	120 ft.	
E1.5X2LG6	1.64 x 2.12	(41.7) x (53.8)		120 ft.	120 ft.	
E1.5X3LG6	1.64 x 3.12	(41.7) x (79.2)		120 ft.	120 ft.	
E1.5X4LG6	1.64 x 4.12	(41.7) x (104.6)		60 ft.	120 ft.	
E2X1LG6	2.14 x 1.12	(54.4) x (28.4)	C2LG6	120 ft.	120 ft.	6 ft.
E2X1.5LG6	2.14 x 1.62	(54.4) x (41.1)		120 ft.	120 ft.	
E2X2LG6	2.14 x 2.12	(54.4) x (53.8)		120 ft.	120 ft.	
E2X2.5LG6	2.14 x 2.62	(54.4) x (66.5)		60 ft.	120 ft.	
E2X3LG6	2.14 x 3.12	(54.4) x (79.2)		60 ft.	120 ft.	
E2X4LG6	2.14 x 4.12	(54.4) x (104.6)		60 ft.	120 ft.	
E2X5LG6	2.14 x 5.12	(54.4) x (130.0)		60 ft.	120 ft.	
E2.5X3LG6	2.64 x 3.12	(67.1) x (79.2)	C2.5LG6	60 ft.	120 ft.	6 ft.
E3X1LG6	3.14 x 1.12	(79.8) x (28.4)	C3LG6	120 ft.	120 ft.	6 ft.
E3X1.25LG6	3.14 x 1.37	(79.8) x (34.8)		120 ft.	120 ft.	
E3X2LG6	3.14 x 2.12	(79.8) x (53.8)		60 ft.	120 ft.	
E3X3LG6	3.14 x 3.12	(79.8) x (79.2)		60 ft.	120 ft.	
E3X4LG6	3.14 x 4.12	(79.8) x (104.6)		60 ft.	120 ft.	
E3X5LG6	3.14 x 5.12	(79.8) x (130.0)		60 ft.	120 ft.	
E4X1.5LG6	4.14 x 1.62	(105.2) x (41.1)	C4LG6	120 ft.	120 ft.	6 ft.
E4X2LG6	4.14 x 2.12	(105.2) x (53.8)		60 ft.	120 ft.	
E4X3LG6	4.14 x 3.12	(105.2) x (79.2)		60 ft.	120 ft.	
E4X4LG6	4.14 x 4.12	(105.2) x (104.6)		60 ft.	120 ft.	
E4X5LG6	4.14 x 5.12	(105.2) x (130.0)		60 ft.	120 ft.	

See page 38 for complete listing of dimensions.
*Adhesive tape is not CSA Certified.

Ordering Information:

- Order number of feet required in multiples of 6 ft or Std. Carton quantities.
- To order with pressure-sensitive adhesive mounting tape applied, add -A to Part Number.
- Part Number shown for Light Gray LG. For other color availability see chart, page 43.

Part Number Nomenclature —

E	.5	X	.5	LG	6
type/style	nominal width (in)		nominal height (in)	color	length (ft)

PANDUCT® Type S — Solid Wall Raceway



Type S Solid Wall Raceway


- Made of rigid PVC (See pg. 41 for material specifications)
- Rated for continuous use temperatures up to 50°C (122°F)
- Available in a variety of colors as a standard part (See page 43 for details)
- Provided with standard mounting holes (See page 38 for dimensions)
- Available without mounting holes (See ordering information below)
- Available with adhesive backing* (See page 25 for details)

Type S— Raceway Standard Colors:

LG	DG	WH
Light Gray	Dark Gray	White

BL	IB
Black	Intrinsic Blue

Colors shown are approximate.



Raceway Part Number	Raceway External Dimensions		Cover Part Number	Raceway Std. Carton Qty.	Cover Std. Carton Qty.	Std. Lgth.
	WxH In.	WxH (mm)				
S.5X.5LG6NM	0.63 x 0.56	(16.0) x (14.2)	C.5LG6	120 ft.	120 ft.	6 ft.
S.5X.62LG6NM	0.63 x 0.68	(16.0) x (17.3)		120 ft.	120 ft.	
S.5X1LG6NM	0.63 x 1.06	(16.0) x (26.9)		120 ft.	120 ft.	
S.5X1.25LG6NM	0.63 x 1.31	(16.0) x (33.3)		120 ft.	120 ft.	
S.5X1.75LG6NM	0.63 x 1.81	(16.0) x (46.0)		120 ft.	120 ft.	
S.5X2LG6NM	0.63 x 2.06	(16.0) x (52.3)		120 ft.	120 ft.	
S.75X.75LG6NM	0.88 x 0.81	(22.4) x (20.6)	C.75LG6	120 ft.	120 ft.	6 ft.
S.75X1LG6NM	0.88 x 1.06	(22.4) x (26.9)		120 ft.	120 ft.	
S.75X1.5LG6NM	0.88 x 1.56	(22.4) x (39.6)		120 ft.	120 ft.	
S.75X2LG6NM	0.88 x 2.12	(22.4) x (53.8)		120 ft.	120 ft.	
S1X1LG6NM	1.14 x 1.12	(29.0) x (28.4)	C1LG6	120 ft.	120 ft.	6 ft.
S1X1.25LG6NM	1.14 x 1.37	(29.0) x (34.8)		120 ft.	120 ft.	
S1X1.5LG6NM	1.14 x 1.62	(29.0) x (41.1)		120 ft.	120 ft.	
S1X2LG6NM	1.14 x 2.12	(29.0) x (53.8)		120 ft.	120 ft.	
S1X2.5LG6NM	1.14 x 2.62	(29.0) x (66.5)		120 ft.	120 ft.	
S1X3LG6NM	1.14 x 3.12	(29.0) x (79.2)		120 ft.	120 ft.	
S1X4LG6NM	1.14 x 4.12	(29.0) x (104.6)		120 ft.	120 ft.	
S1.5X1 LG6NM	1.64 x 1.12	(41.7) x (28.4)	C1.5LG6	120 ft.	120 ft.	6 ft.
S1.5X1.5LG6NM	1.64 x 1.62	(41.7) x (41.1)		120 ft.	120 ft.	
S1.5X2LG6NM	1.64 x 2.12	(41.7) x (53.8)		120 ft.	120 ft.	
S1.5X3LG6NM	1.64 x 3.12	(41.7) x (79.2)		120 ft.	120 ft.	
S1.5X4LG6NM	1.64 x 4.12	(41.7) x (104.6)		60 ft.	120 ft.	
S2X1LG6NM	2.14 x 1.12	(54.4) x (28.4)	C2LG6	120 ft.	120 ft.	6 ft.
S2X1.5LG6NM	2.14 x 1.62	(54.4) x (41.1)		120 ft.	120 ft.	
S2X2LG6NM	2.14 x 2.12	(54.4) x (53.8)		120 ft.	120 ft.	
S2X2.5LG6NM	2.14 x 2.62	(54.4) x (66.5)		60 ft.	120 ft.	
S2X3LG6NM	2.14 x 3.12	(54.4) x (79.2)		60 ft.	120 ft.	
S2X4LG6NM	2.14 x 4.12	(54.4) x (104.6)		60 ft.	120 ft.	
S2X5LG6NM	2.14 x 5.12	(54.4) x (130.0)		60 ft.	120 ft.	
S2.5X3LG6NM	2.64 x 3.12	(67.1) x (79.2)	C2.5LG6	60 ft.	120 ft.	6 ft.
S3X1LG6NM	3.14 x 1.12	(79.8) x (28.4)	C3LG6	120 ft.	120 ft.	6 ft.
S3X1.25LG6NM	3.14 x 1.37	(79.8) x (34.8)		120 ft.	120 ft.	
S3X2LG6NM	3.14 x 2.12	(79.8) x (53.8)		60 ft.	120 ft.	
S3X3LG6NM	3.14 x 3.12	(79.8) x (79.2)		60 ft.	120 ft.	
S3X4LG6NM	3.14 x 4.12	(79.8) x (104.6)		60 ft.	120 ft.	
S3X5LG6NM	3.14 x 5.12	(79.8) x (130.0)		60 ft.	120 ft.	
S4X1.5LG6NM	4.14 x 1.62	(105.2) x (41.1)	C4LG6	120 ft.	120 ft.	6 ft.
S4X2LG6NM	4.14 x 2.12	(105.2) x (53.8)		60 ft.	120 ft.	
S4X3LG6NM	4.14 x 3.12	(105.2) x (79.2)		60 ft.	120 ft.	
S4X4LG6NM	4.14 x 4.12	(105.2) x (104.6)		60 ft.	120 ft.	
S4X5LG6NM	4.14 x 5.12	(105.2) x (130.0)		60 ft.	120 ft.	

See page 38 for complete listing of dimensions.
*Adhesive tape is not CSA Certified.

Ordering Information:

- Order number of feet required in multiples of 6 ft or Std. Carton quantities.
- To order duct with mounting holes, delete NM from Part Number.
- To order with pressure-sensitive adhesive mounting tape applied, add -A to Part Number.
- Part Number shown for Light Gray LG. For other color availability see chart, page 43.

Part Number Nomenclature —

S	.5	X	.5	LG	6	NM
type/style	nominal width (in)		nominal height (in)	color	length (ft)	no mounting holes