

5600 Series Multiple Wattage Fan Forced Unit Heater

3URGXFW 6SHFL & FDWLRQV

CASING & CONSTRUCTION:

Fabricated of die formed, heavy gauge VWHHO DQG & QLVKHG ZLWK WZR WRQH EURZQ and beige, durable powder coated paint. Supply air is drawn through the rear heavy duty expanded steel inlet grill. Heated air is discharged through front adjustable louvers, which are spring loaded for individual adjustment. Made in U.S.A.

ELEMENT: +HDY\ GXW\ EORFN & Q

element design. The multiple tap electric FRQQHFWLRQ GHVLJQ DOORZV FRQYHUVRQ to eight wattage settings at 208/240-Volt single phase or 240/480 Volt, 3 phase.

Units are available on special order with a VSHFL & F ZDWWDJH YROWDJH


MOTOR: Motor shall be totally enclosed, permanently lubricated, all angle industrial rated with thermal overload protection.

WIRING: Wiring to terminal block adjacent to incoming knockout in accordance with NEC and local codes.

THERMAL OVERLOAD: All heaters shall be equipped with an automatic reset thermal cutout to shut down the element and motor circuits if unsafe operating temperatures are exceeded.

CONTROLS: The heater shall have a heavy-duty hydraulic thermostat factory installed and wired. All controls and wiring shall be in a large wiring compartment with hinged door for easy access. An optional disconnect switch VKDOO EH DYDLODEOH IRU & HOG LQVWDOODWLRQ

MOUNTING: Heaters are standard with a three position-mounting bracket for wall, ceiling or workbench. Heaters can be mounted for horizontal or vertical discharge. Note: Minimum mounting height is 6 feet, and minimum distance from side of heater to nearest wall is 6 inches. Note: Approved for residential applications.

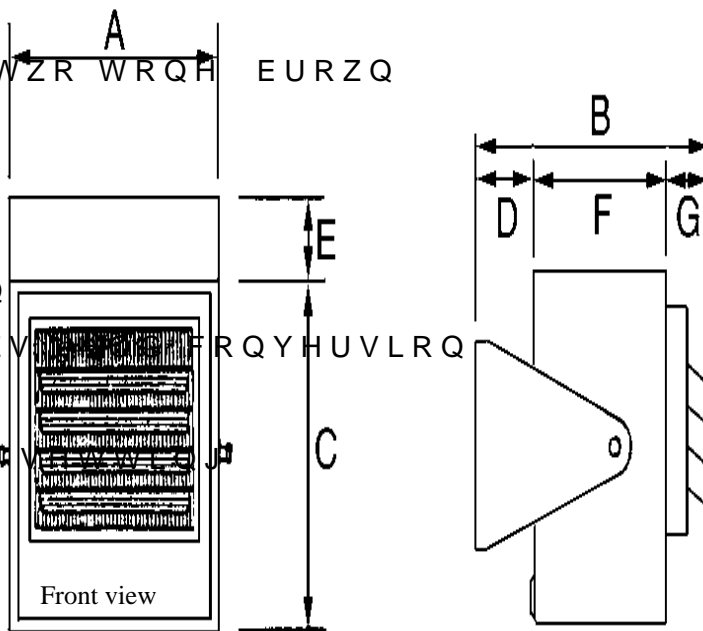

Product Dimensions

A	B	C	D	E	F	G
14"	12 11/16"	14"	1 9/16"	1 9/16"	9"	2 3/8"

Standard Models

MFG CATALOG NUMBER	MFG MODEL NUMBER	WATTS	BTUs	VOLTS	PHASE	AMPS	TEMP RISE	AIR THROW	CFM	WT. (LBS)
07072802	HF5605T	5000	17065	240	1	21	57 °F	16'	275	32
		4165	14215			17	48 °F			
		3332	11365			14	38 °F			
		2500	8533			10	29 °F			
		3750	12798	208	1	18	43 °F			
		3123	10659			15	36 °F			
2500	8553	12	29 °F							
1874	6396	9	21 °F							
07072902	H3H5605T	3750	12799	208	3	10.4	57 °F	16'	375	32
		5000	17065	240	3	12	57 °F	16'	275	32
07073002	P3P5605T	5000	17065	480	3	6	57 °F	16'	275	32
07073602	DCS-MT303	Optional Field Installed Disconnect Switch, 30 Amp @ 600Volts								

)RU 9 FRQWURO RQ VLQJOH SKDVH PRGHOV GHOWH 7 VXL & [