



LED BR30

7.2BR30/COR/930/P/E26/DIM 6/1FB T20

Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.

Product data

General Information		Starting Time (Nom)	
Cap-Base	E26 [Single Contact Medium Screw]		0.5 s
Nominal lifetime	15,000 hour(s)	Warm-up time to 60% light	0.5 s
Switching Cycle	50,000	Power Factor (Fraction)	0.7
Lighting Technology	LED	Voltage (Nom)	120 V
Light Technical		Temperature	
Color Code	930 [CCT of 3000K]	T-Case Maximum (Nom)	75 °C
Beam Angle (Nom)	90 degree(s)	Controls and Dimming	
Luminous Flux	650 lm	Dimmable	Yes
Color Designation	White (WH)	Mechanical and Housing	
Correlated Color Temperature (Nom)	3000 K	Bulb Finish	Frosted
Luminous Efficacy (rated) (Nom)	90.00 lm/W	Bulb Material	Plastic
Color Consistency	<4	Bulb Shape	BR30
Color rendering index (CRI)	90	UL Wet/ damp/ dry location	Damp location
LLMF At End Of Nominal Lifetime (Nom)	70 %	Net Weight (Piece)	0.055 kg
Operating and Electrical		Approval and Application	
Line Frequency	60 Hz	Energy Consumption kWh/1000 h	- kWh
Input Frequency	60 Hz	EU RoHS compliant	Yes
Power Consumption	7.2 W	T20 compliant	Yes
Lamp Current (Nom)	82 mA		
Wattage Equivalent	65 W		

LED BR30

Application Conditions


can it be used in closed luminaires Yes

Product Data

Order product name	7.2BR30/COR/930/P/E26/DIM 6/1FB T20
Full product name	7.2BR30/COR/930/P/E26/DIM 6/1FB T20
Order code	929002032104


Material Nr. (12NC)	929002032104
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677545901
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677545906

Dimensional drawing

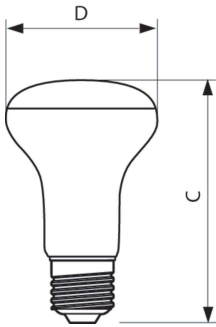


Product	D	C
7.2BR30/COR/930/P/E26/DIM 6/1FB T20	95 mm	132 mm


Photometric data



Light Distribution Diagram - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

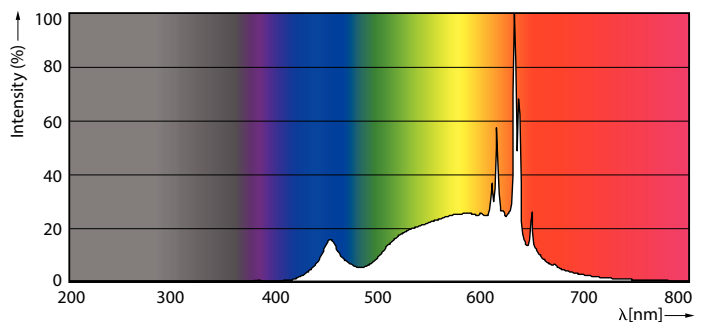

Spectral Power Distribution Colour - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20





General Uniform Lightness

Accent Lighting Spots - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

LED BR30

Lifetime

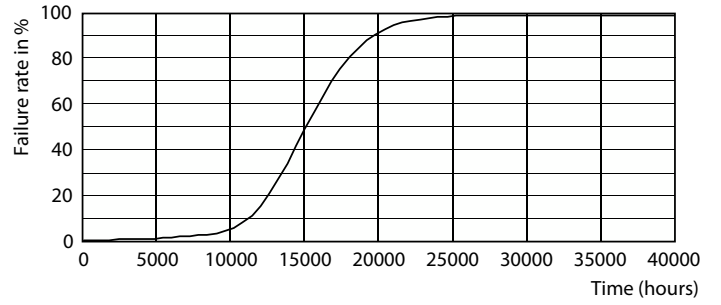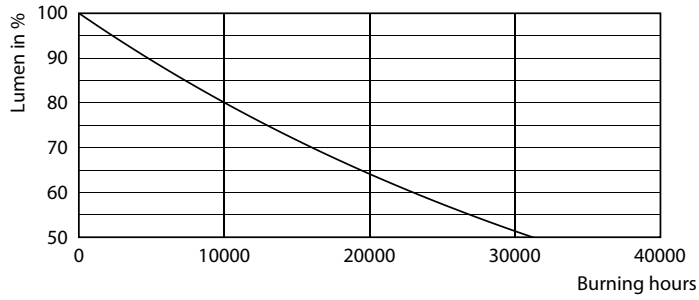

Lumen Maintenance Diagram - 7.2BR30/COR/930/P/E26/DIM 6/1FB T20

LEDBulbs BR30 120V 19-120W 1200lm 2700K E26 D

