


## Micro Armor Fiber™ The Original Stainless Steel Armor MultiMode 6 Core 900um OM3 Plenum Armored Optical Fiber Cable Model # TF6-OM3-PL

TiniFiber® is a revolutionary designed fiber optic cable that will provide the single best solution for all your fiber optic projects and usage. Micro Armor Fiber™ can be used in any channel from Telco, CATV, WAN LAN, SAN, Broadcast, DAS, Communication, Security, Indoor, Outdoor as well as Aerial installations and regardless of environmental conditions.

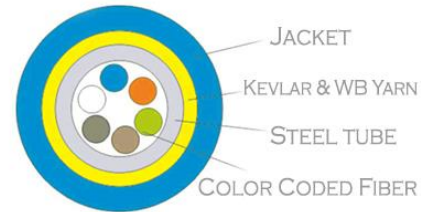

**Outer Jacket**  
Material: Plenum  
Color: Aqua  
Outer Diameter: 6.5 mm

900um color coded fiber, Steel tube,  
Kevlar/Water block yarn Outer Jacket (Aqua)  
UL/OFCP

### TiniFiber® Micro Armor Fiber™ Key Features


Feature	Benefits
<b>Micro Armor Fiber™</b>	<ol style="list-style-type: none"> <li>1. The smallest OD of any armor compared to conventional optical fiber cable in size and flexibility</li> <li>2. Lightest and smallest armor makes routing and installation faster and easier</li> <li>3. Cables are up to 65% smaller and 75% lighter than conventional Aluminum Interlocking Armor (AIA)</li> </ol>
<b>Encased Stainless Steel Coiled Tubular Armor</b>	<ol style="list-style-type: none"> <li>1. Provides the strongest armor with maximum bend radius and designed for all indoor &amp; outdoor conditions</li> <li>2. Crush and rodent resistance for multiple usages</li> </ol>
<b>Outer Jackets</b>	<ol style="list-style-type: none"> <li>1. All jackets and colors for Riser, Plenum, Indoor/Outdoor, LSZH, Burial &amp; Industrial projects</li> </ol>
<b>MultiMode/SingleMode Strands</b>	<ol style="list-style-type: none"> <li>1. OS2, OM1, OM3, OM4 from 1 to 144 Strands (250u/900u/Ribbon)</li> <li>2. Available in all standard connectors</li> </ol>
<b>Kevlar Fiber Strands</b>	<ol style="list-style-type: none"> <li>1. Adds tensile strength and flexibility</li> </ol>

### Competitive Product Analysis

Feature	Micro Armor Fiber™	Aluminum Interlock Armor (AIA)	Conventional Fiber Cable Jacket
<b>Maximum Bend Radius</b>	✓		✓
<b>Smallest OD With Armor</b>	✓		
<b>Lightest Armor Fiber</b>	✓		
<b>Strongest Armor Fiber</b>	✓	✓	
<b>Lowest Installation Cost</b>	✓		✓

## Micro Armor Fiber™ The Original Stainless Steel Armor MultiMode 6 Core 900um OM3 Plenum Armored Optical Fiber Cable Model # TF6-OM3-PL

**Common Installations:** Ducts, conduits and indoor when installed according to NEC® Article 770  
**Design and Test Criteria:** ANSI/ICEA S-87-640

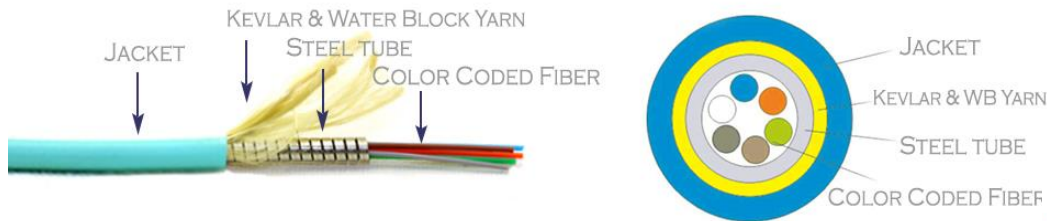

### Competitive Product Analysis

Application	Indoor Premise, Duct, Conduits and Patch
Fiber Category	MultiMode (OM3)
Fiber Make	Corning ClearCurve OM3
Storage	-40 °C to 80 °C (-40 °F to 176 °F)
Installation	-30 °C to 80 °C (-22 °F to 176 °F)
Operation	-40 °C to 80 °C (-40 °F to 176 °F)
Max. Dynamic Tensile Strength	800 N
Max. Static Tensile Strength	600 N
Max. Dynamic Crush Resistance	5000 N
Max. Static Crush Resistance	3000 N
Min. Dynamic Bend Radius	20D
Min. Static Bend Radius	10D
Nominal Outer Diameter	6.5 mm
Weight	55 kg/km
Stainless Steel Tube Outer Diameter	4.4mm
Stainless Steel Tube Inner Diameter	3.2 mm
Wavelengths/Max. Attenuation	850 nm/<3.0dB/km, 1300 nm/<1.0dB/km
Fiber core/cladding diameter	50/125 um
Fiber Count	Six (6)
Steel Braid	No
Kevlar	1000dtex
Maximum Data Rate	40 GB
NEC Rating	OFCP