THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
HB0D2J0AA10M1	2.3 lb (1.1 kg)

NOTES:
1. IDENTIFICATION: 1RU HORIZONTAL, (10) C-13
   230V / 16A / SINGLE-PHASE POU

PART NO.	COLOR
HB0D2J0AA10M1	BLACK

2. ACCESSORY COMPONENTS:
   (4) 10-32 x 1/2" MOUNTING SCREWS
   (4) 12-24 x 1/2" MOUNTING SCREWS
   (1) RETAINING CLAMP FOR C-20 INLET


3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).


4. UNIT COMPLIES WITH IEC 60950-1, EN55022, EN55024, AND IS CE MARKED.


5. RoHS COMPLIANT.

6. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.


7. MAXIMUM AVAILABLE POWER = 3.7 KW

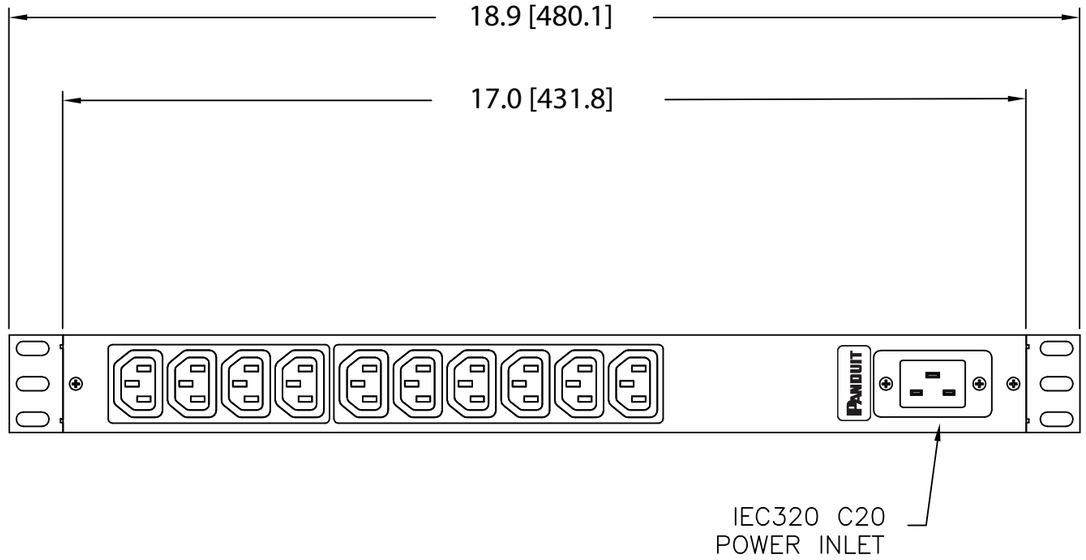

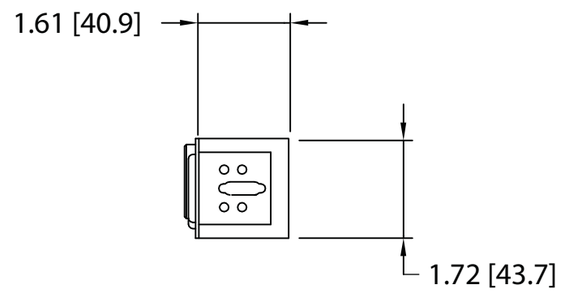



C20 POWER INLET
20 AMP, 250V, SINGLE-PHASE
SOCKET
IEC320



TEN (10)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
00A	2-10-11	MAV	KRKE	RELEASED TO PRODUCTION	09V098HH			

MODEL FILENAME: 09V098HH/00.PRT
CAD FILENAME/LAYERS: 09V098HH_DC/00A.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

1RU HORIZONTAL, (10) C-13
POWER OUTLET UNIT (HB0D2J0AA10M1)
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

INCHES		[METRIC - MILLIMETER]		ANGLE
X.X	+/- 0.03	X.	+/- 0.8	+/- 1°
X.XX	+/- 0.015	X.X	+/- 0.4	
X.XXX	+/- 0.005	X.XX	+/- 0.13	

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MAV
MAT'L:
SCALE: NONE
DATE: 2-10-11
CHK'D: KRKE
DRAWING NO.: 09V098HH
DWG SIZE: B