

LITESTAK® LIGHT (LSL) AND BASE (LSB)


Mounting Options

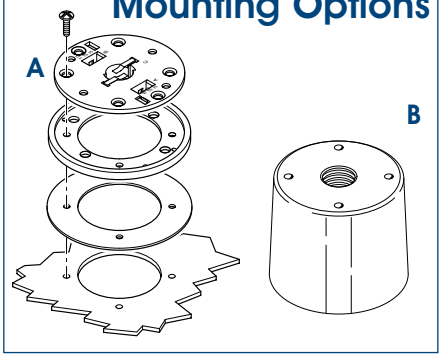

A) LSBS Low Profile Base B) LSB Base

Litestak® Heights

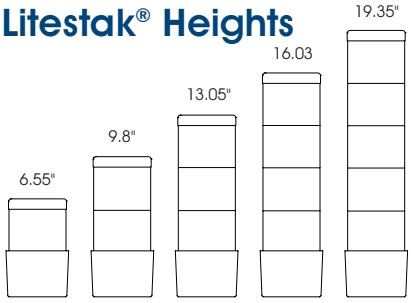

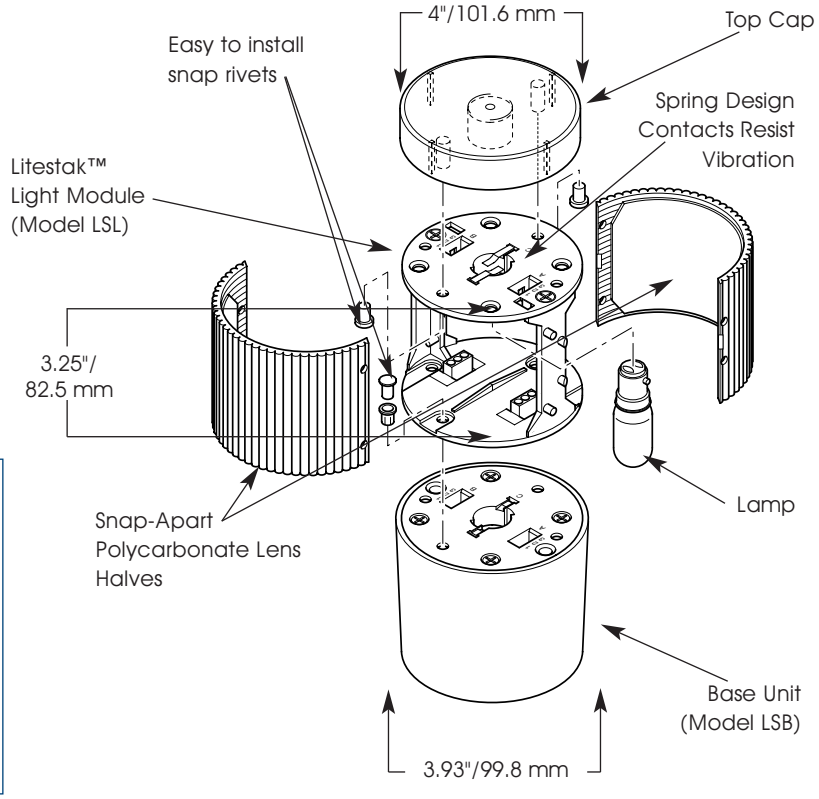

SPECIFICATIONS

Lamp Life*:		7,000 Hours	7,000 Hours
Lamp Style:		Incandescent	Incandescent
Operating Temperature:		0°F to 120°F	-18°C to 49°C
Net Weight:	LSL	0.5 lbs.	0.2 kg
	LSB	0.75 lbs.	0.3 kg
Shipping Weight:	LSL	0.8 lbs.	0.4 kg
	LSB	1.0 lbs.	0.4 kg
Height:	LSL	3.25"	82.5 mm
	LSB	3.3"	82.8 mm
Diameter:	LSL	3.93"	99.8 mm
	LSB	3.93"	99.8 mm

* Optimal hours under ideal conditions.

HOW TO ORDER

- Light modules and base modules are ordered separately
- Specify model and voltage of base unit
- Specify model, voltage and colors of light modules
- Specify optional sound module (page 24 & 26)
- Please refer to Model Number Index LSL/LSB beginning on page 372

REPLACEMENT PARTS

Description	***Part Number***	***Description***	***Part Number***
Lens Kit, Amber	K8447014A-02	Lamp, 24VDC	K8107210A
Lens Kit, Blue	K8447014A-04	Lamp, 120VAC	K8107194A
Lens Kit, Clear	K8447014A-05	Lamp, 240VAC	K8107A149A
Lens Kit, Green	K8447014A-01	Flasher, 24VDC	K8285237A
Lens Kit, Red	K8447014A-03	Flasher, 120VAC	K8285239A
Lens Kit, Blackout (1/2 lens)	K8447014A-06	Cap Kit-Snap Rivets included	K8447009E
Snap Rivets, 25 pieces	K7099A112A-01		