IEC Pin and Sleeve

30A, 3 Phase 250V, 3 Pole, 4 Wire

Low Profile Pin and Sleeve Receptacle

Features

- Split sleeves with self-adjusting stainless steel springs
- Stainless steel terminal screws resist rust and corrosion




Ordering Information

Description	UPC	Catalog Number
Low Profile Pin and Sleeve Receptacle, IEC	783585888101	**L430R9**

Device Color
Blue

Specifications

Body	Zytel® 101 Nylon
Sleeves	Brass CDA #360
Assembly Screws	Stainless Steel
Terminal Screws	Stainless Steel

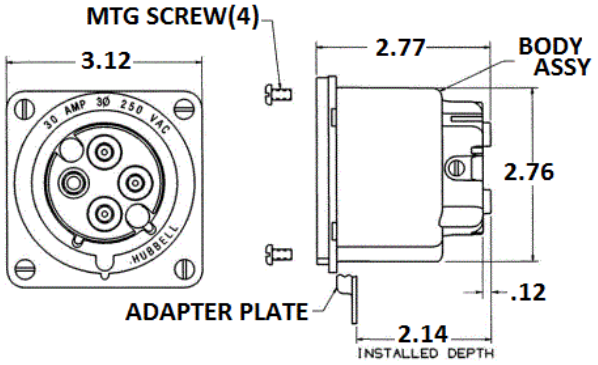

Performance

Electrical

Current Interrupting	Certified for current interruption at full rated current
Dielectric Voltage	Withstands 3,000V AC
Max Working Voltage	250V RMS

Mechanical

Impact Resistance	Per CSA C22.2 No. 182.1 / UL1682
Product Identification	Ratings are a permanent part of the device housing
Terminal Identification	Terminals identified in accordance with North American convention

Environmental

Flammability	HB or better per UL 94 or CSA C22.2 No. 0.17
Ingress Protection	IP22 Suitability
Operating Temperatures	Max. Continuous +75°C; Min. -40°C w/o impact

Online Resources

Customer Use Drawing
eCatalog
Installation Instructions

Dimensions in Inches (mm)

Wiring Device-Kellems