




Steel City

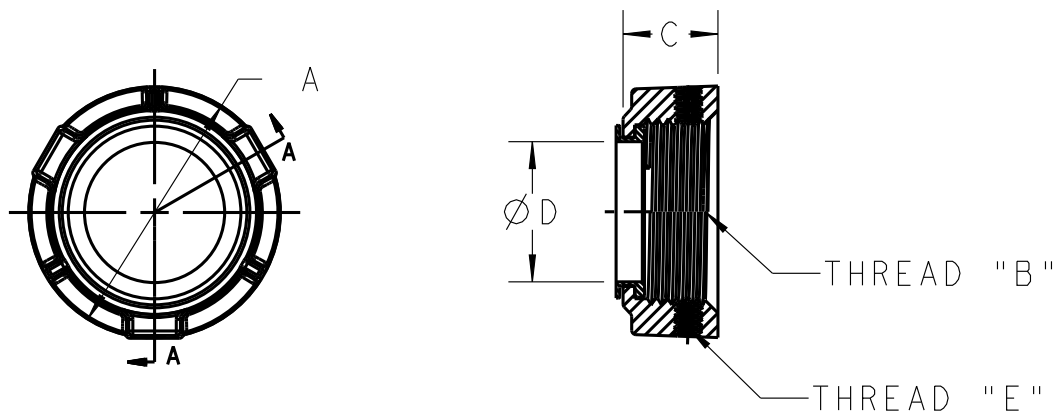

MATERIAL:

BUSHING : SEE TABLE
INSULATOR : THERMO PLASTIC
TEMPERATURE RATING -105°C

FINISH: ZINC PLATED

T&B CAT NO.	Ø A [IN]	B NPSM THREAD	C [IN]	Ø D		E UNC THREAD	MATERIAL
				MIN [IN]	MAX [IN]		
BI 901	1.13	1/2"-14	.56	.560	.622	#10-24	MALLEABLE IRON
BI 902	1.40	3/4"-14	.56	.742	.824	#10-24	MALLEABLE IRON
BI 903	1.75	1"-11 1/2	.66	.944	1.049	#10-24	MALLEABLE IRON
BI 904	2.12	1 1/4"-11 1/2	.66	1.242	1.380	#10-24	MALLEABLE IRON
BI 905	2.34	1 1/2"-11 1/2	.72	1.449	1.610	#10-24	MALLEABLE IRON
BI 906	2.73	2"-11 1/2	.72	1.860	2.067	#10-24	MALLEABLE IRON
BI 907	3.25	2-1/2"-8	.94	2.222	2.469	1/4" -20	DUCTILE IRON
BI 908	3.86	3" -8	.94	2.761	3.068	1/4" -20	DUCTILE IRON
BI 909	4.38	3-1/2"-8	.94	3.193	3.548	1/4" -20	DUCTILE IRON
BI 910	4.88	4"-8	.94	3.623	4.026	1/4" -20	DUCTILE IRON

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

www.tnb.com

Thomas & Betts

A Member of the ABB Group

DESCRIPTION:

RIGID/IMC CONDUIT BUSHING WITH INSULATOR

REVISIONS

SEE ERN (****)
FOR APPROVAL SIGNATURES
& RELEASE DATE.
PROJECT NO: ****

ORIGINAL PROJECT NO / (ERN NO)

117P000680 / (2016374)

SHEET NO:

1 OF 1

REV. NO:

-

DRAWING NO:

WSD-001490