THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
HB0D2A0BA08W1	5.7 lb (2.7 kg)


NOTES:


1. IDENTIFICATION: 1RU HORIZONTAL, MIXED (4) C-13 & (4) C-19
   230V / 16A / SINGLE-PHASE POU

PART NO.	COLOR
HB0D2A0BA08W1	BLACK


2. ACCESSORY COMPONENTS:
   (4) 10-32 x 1/2" MOUNTING SCREWS
   (4) 12-24 x 1/2" MOUNTING SCREWS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. UNIT COMPLIES WITH IEC 60950-1, EN55022, EN55024, AND IS CE MARKED.
5. RoHS COMPLIANT.
6. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
7. MAXIMUM AVAILABLE POWER = 3.7 KW

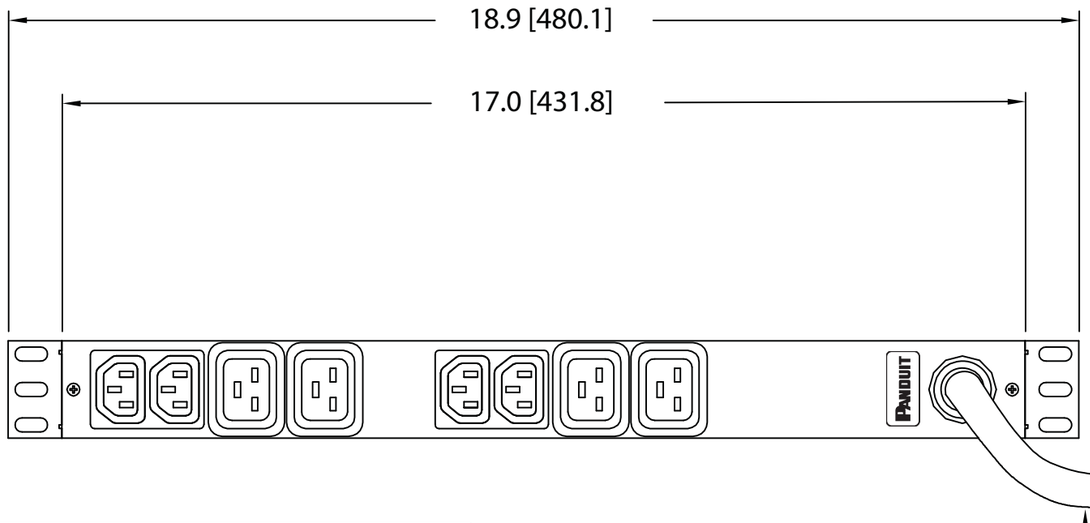

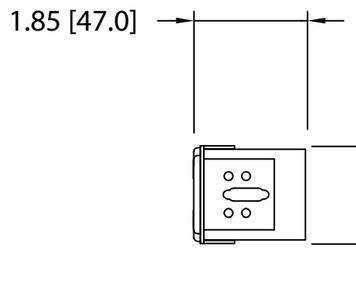




PLUG
16 AMP, 250V, SINGLE-PHASE
2P/3W
IEC 60309, SPLASHPROOF



FOUR (4)
RECEPTACLES
10 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13



FOUR (4)
RECEPTACLES
16 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
00A	2-10-11	MAV	KRKE	RELEASED TO PRODUCTION	09V098HD			

MODEL FILENAME: 09V098HD/00.PRT

CAD FILENAME/LAYERS: 09V098HD_DC/00A.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

1RU HORIZONTAL, MIXED (4) C-13 & (4) C-19
POWER OUTLET UNIT (HB0D2A0BA08W1)
CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:

INCHES		[METRIC - MILLIMETER]		ANGLE
X.X	+/- 0.03	X.	+/- 0.8	+/- 1°
X.XX	+/- 0.015	X.X	+/- 0.4	
X.XXX	+/- 0.005	X.XX	+/- 0.13	

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MAV
DATE: 2-10-11
CHK'D: KRKE
MAT'L:
SCALE: NONE
DRAWING NO.: 09V098HD
DWG SIZE: B