

Standard

STANDARD MAG BALLAST (2) F20T12 PH 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information		Wiring	
Lamp Type	F20T12	Wire Striplength	0.50/0.375 mm
Number of Lamps	2 piece/unit	Lamp Connection	Series
Lamp Footage	-	Wire Length By Color	See data sheet
Ballast Type	Magnetic Fluorescent	Wire Gauge (Nom)	18AWG mm
Base Model	HM2SP20TP	Wire Type	Solid
Suitable For Outdoor Use	Yes	Remote Wiring Configuration Allowed	Yes
Automatic Restart	Yes	Tandem Wiring Configuration Allowed	Yes
Operating and Electrical		Through Wiring Configuration Allowed	Yes
Input Voltage	120 V	Max Ballast-Lamp Distance Remote Wiring	30'
Input Frequency	60 Hz	Max Ballast-Lamp Distance Tandem Wiring	Any = 30'
Max THD	10 %	Max Ballast-Lamp Distance Through Wiring	Any = 30'
Power (Rated) (Nom)	20 W	Mechanical and Housing	
Starting Method	Preheat	Housing Material	Metal
Lamp Current Crest Factor (Nom)	1.7	Housing	T2
Ignition Time (Nom)	1 s	Housing Dimensions	9.5" x 2.38" x 1.5"
Ballast Factor (Nom)	0.9	Approval and Application	
Power Factor (Nom)	0.93	EMC Immunity Standard	FCC Non-Consumer
Input Current (Operating) (Nom)	0.47 A	Sound Rating	A
Input Power (Nom)	53 W	UL Recognized	No
Rated Lamp Watts	20W W		


Standard

Product Data

Order product name	STANDARD HM2SP20TPI
EAN/UPC - Product	781087106921
Order code	HM2SP20TPI
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	10
Material Nr. (12NC)	913700564119
Net Weight (Piece)	1.466 kg

Dimensional drawing

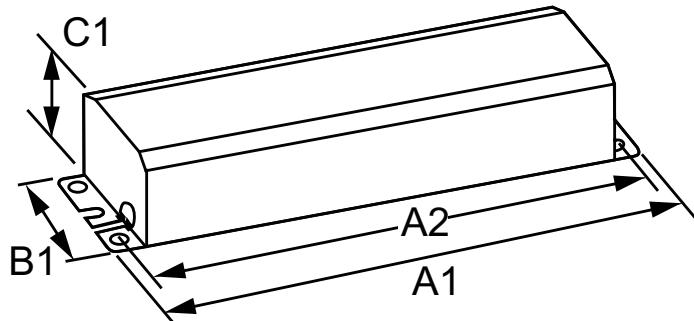

MAG BALLAST (2) F20T12 PH 120V

Product	A1	A2	B1	C1

