

BALDOR® • RELIANCE

Product Information Packet

ECP4406T-4


150HP,1785RPM,3PH,60HZ,445T,A4488M,TEFC


Part Detail							
Revision:	H	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	A4488M	Elec. Spec:	A44WG3335	CD Diagram:	416820-036
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:		Layout:	617427-001
Frame:	445T	Mounting:	F1	Poles:	04	Created Date:	08-10-2012
Base:		Rotation:	R	Insulation:	F	Eff. Date:	09-17-2015
Leads:	3#1/0					Replaced By:	
Literature:		Elec. Diagram:					

Nameplate NP3238

CAT NO	ECP4406T-4	SPEC NO.	P44G3930		
HP	150	AMPS	169	VOLTS	460
FRAME	445T	RPM	1785	DESIGN	B
D.E. BRG.DATA	6318	HZ	60	AMB	40
D.E. BRG.	90BC03J30X	O.D.E. BRG.DATA	6318	SF	1.15
O.D.E. BRG.	90BC03J30X	TYPE	P	ENCL	TEFC
3/4 LOAD EFF.	96.1	POWER FACTOR	86	PH	3
TEMP CODE	T3	MAX CORR KVAR	30.0	DUTY	CONT
CHP HZ	60-90	TEMP =	200	INSUL.CLASS	F
INVERTER-TEMP-CODE	T3	CT HZ	15-60	NEMA NOM EFFICIENCY	95.8
SER.NO.		VT HZ	0-60	GUARANTEED EFFICIENCY	95.0
		MOTOR WEIGHT	2190		

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	445T	150	P	3/60	1785	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
169	CONT	40/F	1.15	B	F	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
49808	418143053AE	---	---	.0298		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER FACTOR	% EFFICIENCY	
NO LOAD	0	48.9	1800	3.78	0	
1/4	37.6	68.7	1796	54.4	94.2	
2/4	75.0	96.7	1792	75.7	96.0	
3/4	112	131	1788	83.6	96.1	
4/4	150	169	1784	86.8	95.8	
5/4	188	210	1779	87.9	95.2	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	130	572	1041		
PULL UP	270	116	511	1020		
BREAKDOWN	1729	280	1237	579		
FULL LOAD	1784	100	442	169		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE REMARKS: TYPICAL DATA NEMA NOMINAL EFFICIENCY = 95.8 PCT.						
BALDOR A MEMBER OF THE ABB GROUP DR. BY _____ CK. BY _____ APP. BY _____ DATE 01/18/11 A-C MOTOR PERFORMANCE DATA A44WG3335-R001 ISSUE DATE 01/20/17						

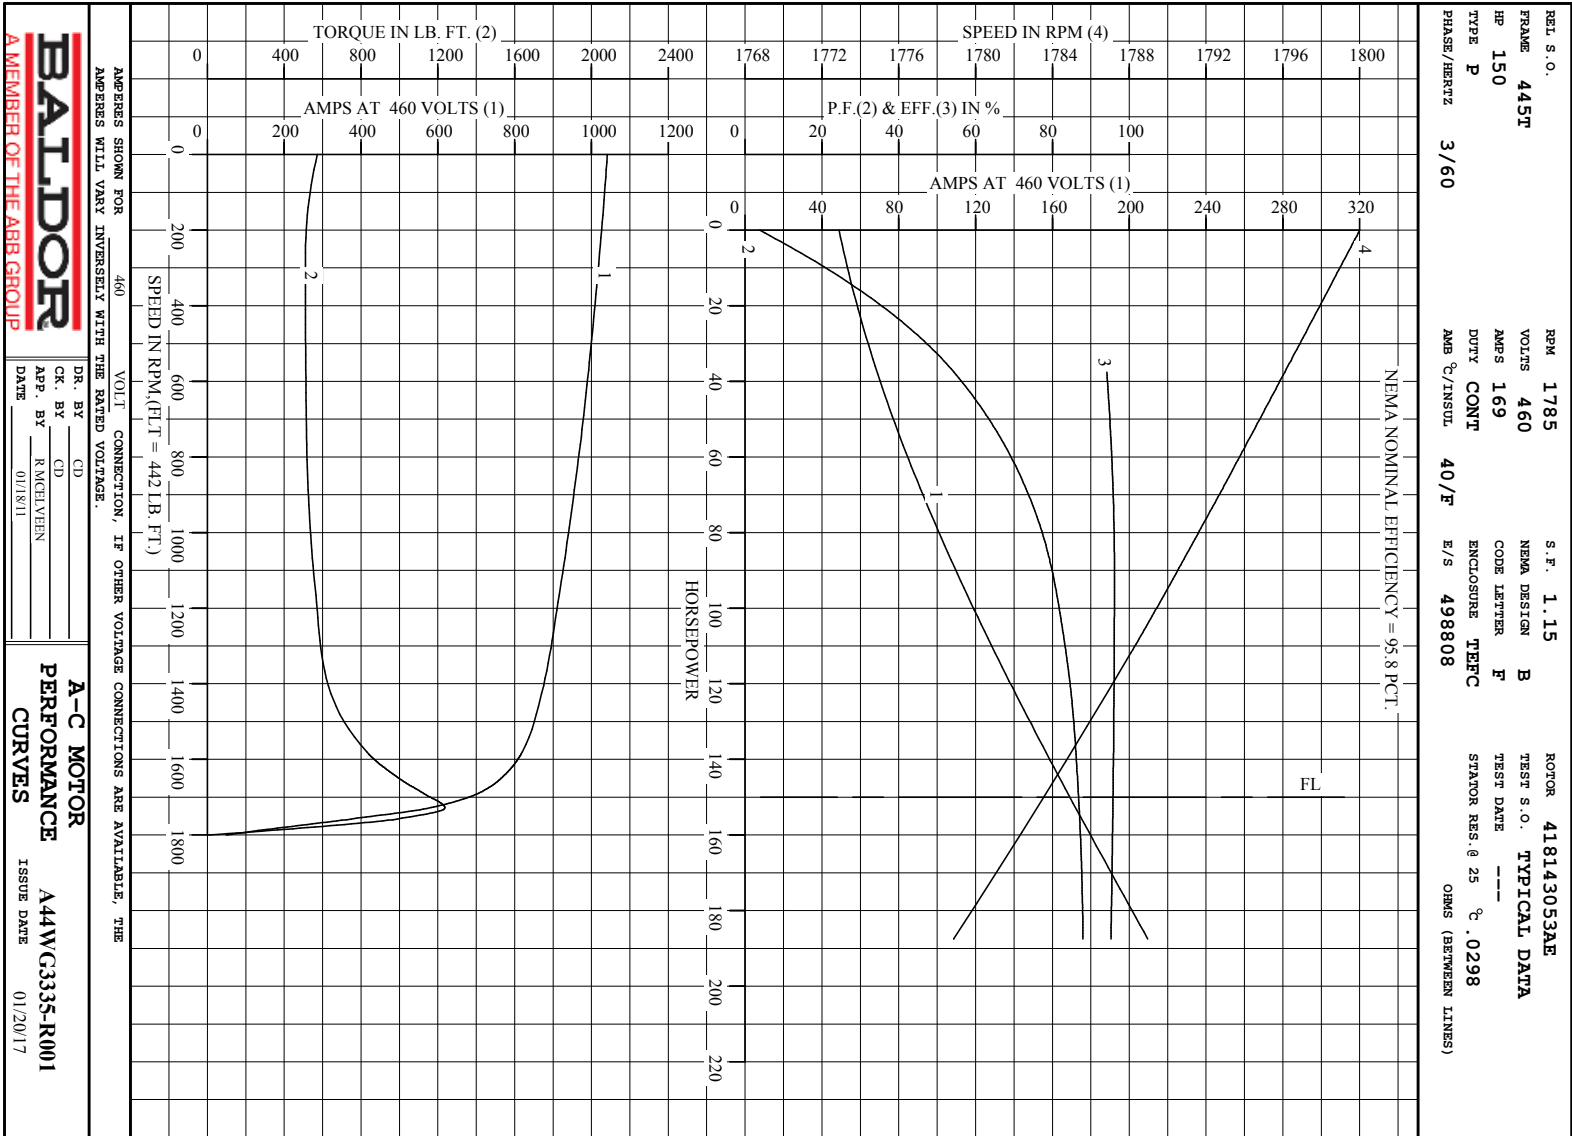

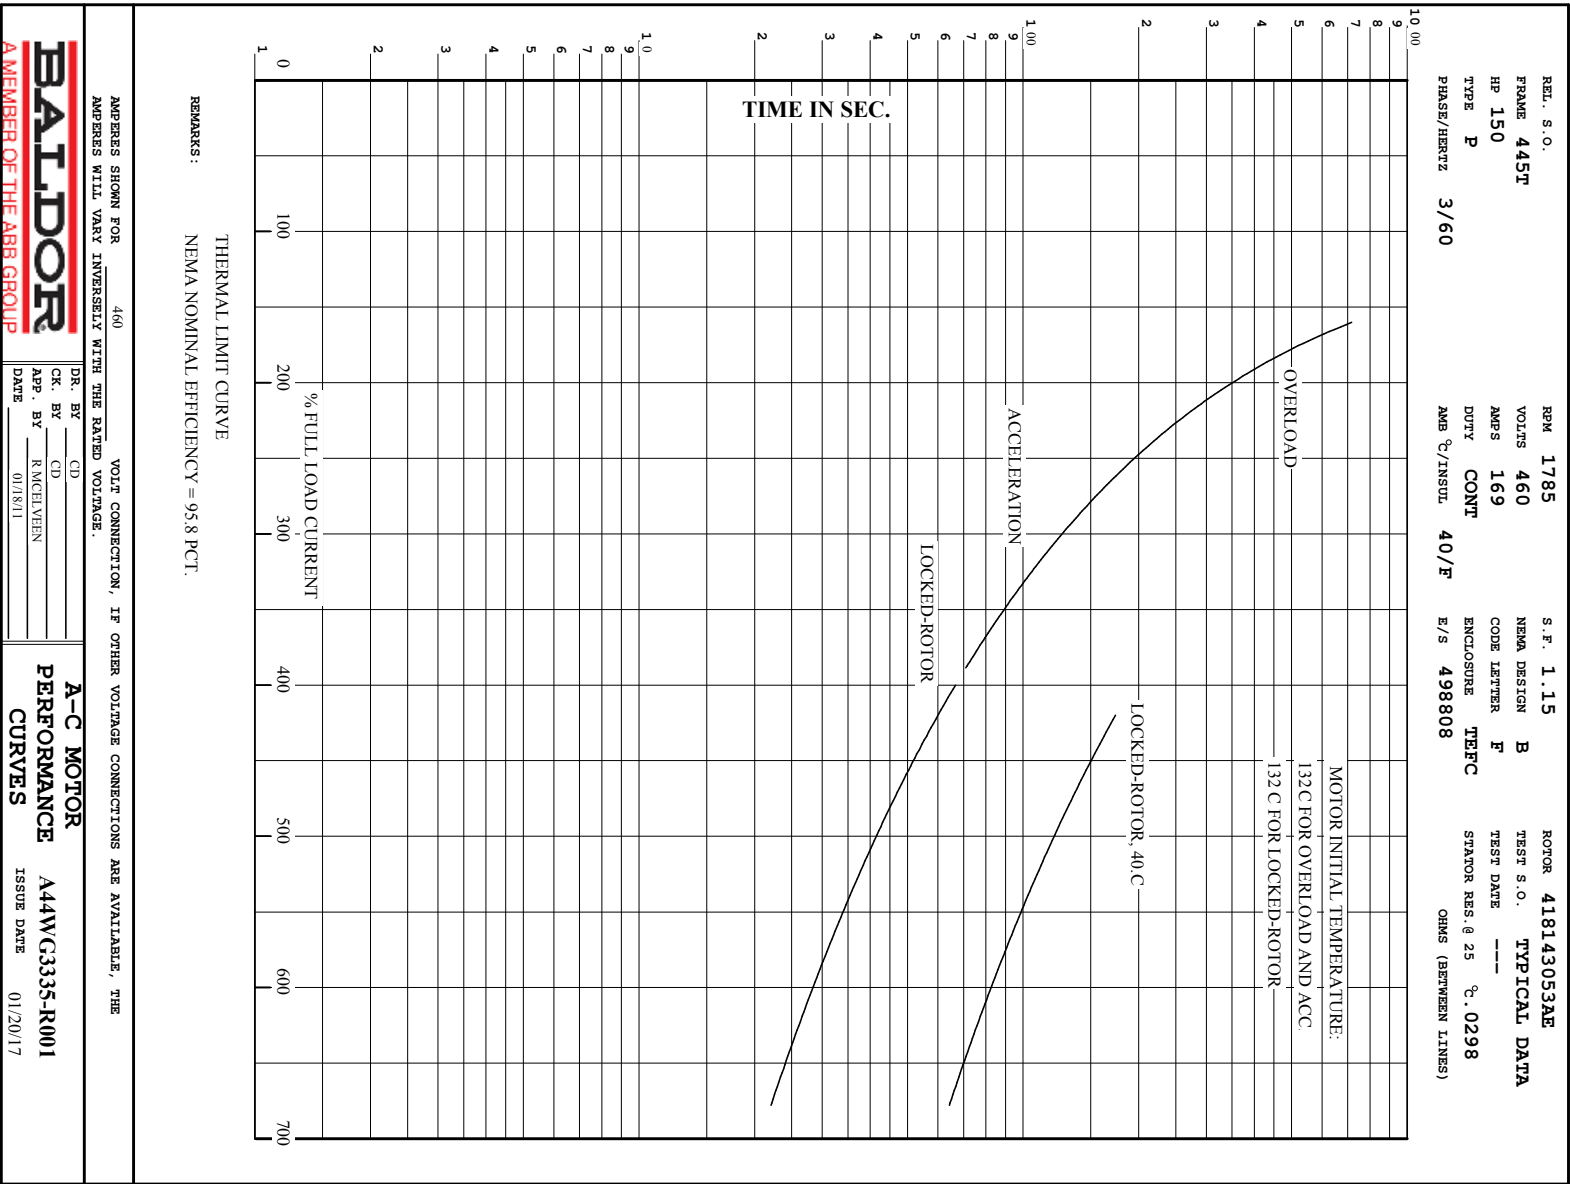

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION



ENCLOSURE: TOTALLY ENCLOSED

FRAME G445T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 444T FRAME MOUNTING HOLES

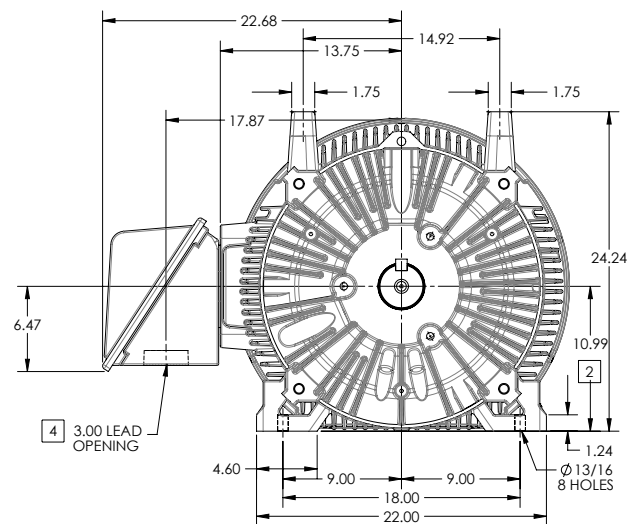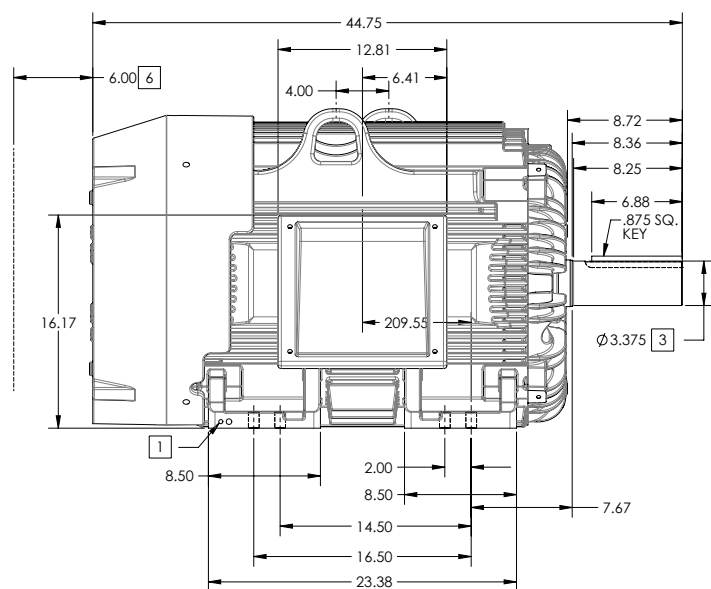

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +.00,-.06
3. VARIES +.00,-.001
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .003" T.I.R. TO 5 INCH DIA.

[5] WEIGHT (LBS): 2130

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN INCHES; SEE SHEET 2 FOR DIMENSIONS IN MILLIMETERS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
1 OF 2

100-2272119

REV. DESC: SHEET 2 NEEDS METRIC FOOT HOLE DIMENSION			
REV: E	VERSION: 05	REVISED: 09-22-56 06/12/2014	TDR: 000000857938
MODEL NO. 617427-001		REF:	
BY: RAGRA	Material:		

BALDOR

G445T/444T STD - FOOTED - SIDE/CENTER C/B

617427-001

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION



ENCLOSURE: TOTALLY ENCLOSED

FRAME G445T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 444T FRAME MOUNTING HOLES

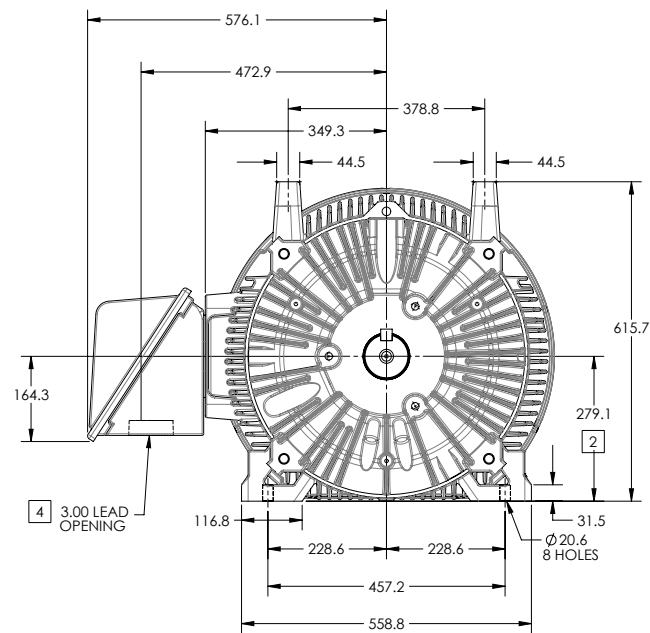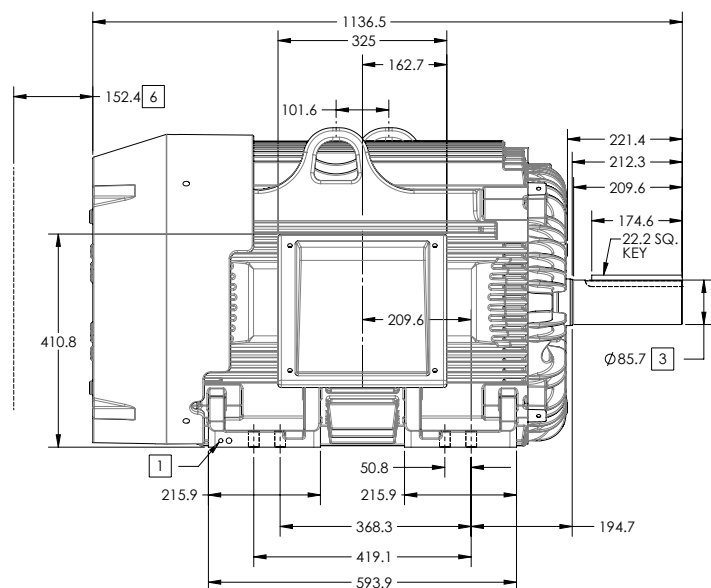

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +0,-1.5
3. VARIES +00,-.03
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .08 MM T.I.R. TO 127 MM DIA.

[5] WEIGHT (KGS): 970

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN MILLIMETERS; SEE SHEET 1 FOR DIMENSIONS IN INCHES

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

 SHEET NUMBER
2 OF 2

100-227-119

REV. DESC: SHEET 2 NEEDS METRIC FOOT HOLE DIMENSION	
REV: E	VERSION: 05
MODEL NO. 617427-001	REVISED: 09-22-56 06/12/2014
BY: RAGRA	TDR: 000000857938
Material:	REF:

BALDOR

G445T/444T STD - FOOTED - SIDE/CENTER C/B


416820-036

A-C MOTOR

CONNECTION DIAGRAM

STANDARD 3 LEAD

CONNECTED

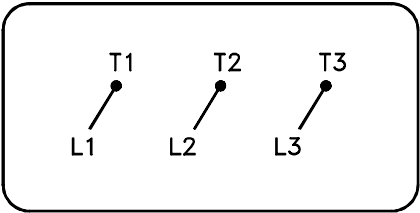

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225			BALDOR
REV. LTR: -	VERSION: 00	TDR: 000000538207	
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010	
MTL: -		BY: RAGRA	
			CONN DIAG - STANDARD 3 LEAD
			SH 1 of 1