



Retail Sales T8

F15T8 BRIGHT WHITE/18 ALTO SL6


Energy Savings, extra long life, extra low mercury. T8 lamps offer high energy savings, superior lumen output, and long life in an environmentally responsible lamp.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Features	ALTO® (ALTO)
Life to 50% Failures (Nom)	13,000 hour(s)
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	990 lm
Color Designation	Soft White
Correlated Color Temperature (Nom)	3000 K
Color rendering index (CRI)	83
Operating and Electrical	
Power Consumption	15 W
Lamp Current (Nom)	0.335 A
Wattage Equivalent	15 W
Voltage (Nom)	55 V
Voltage (Nom)	55 V
Controls and Dimming	
Dimmable	Yes



Mechanical and Housing	
Bulb Shape	T8
Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg
Product Data	
Order product name	F15T8 BRIGHT WHITE/18 ALTO SL6
Full product name	F15T8 BRIGHT WHITE/18 ALTO SL6
Order code	928022883028
Material Nr. (12NC)	928022883028
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677392123
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677392128

Dimensional drawing

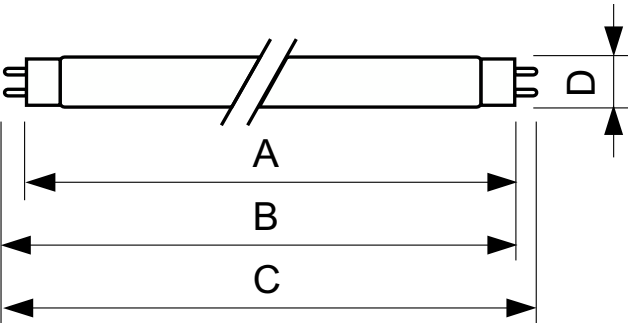


Product	D (max)	A (max)	B (max)	B (min)	C (max)
F15T8 BRIGHT WHITE/18 ALTO SL6	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

Lifetime

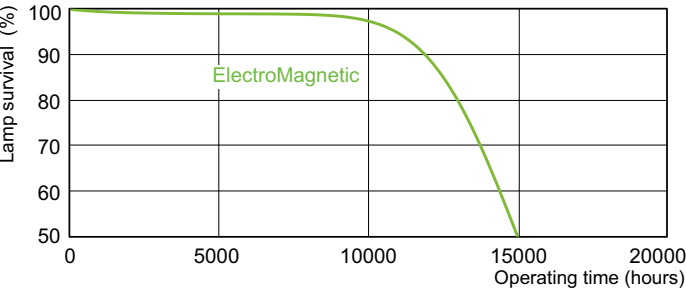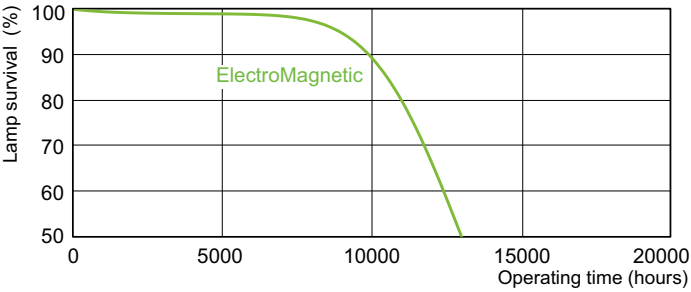

Life Expectancy Diagram - F15T8 BRIGHT WHITE/18 ALTO SL6

Life Expectancy Diagram - F15T8 BRIGHT WHITE/18 ALTO SL6

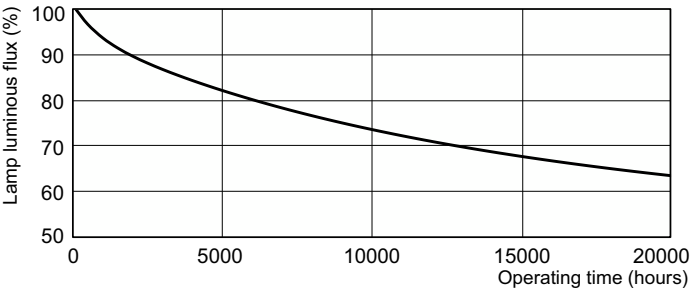

Lumen Maintenance Diagram - F15T8 BRIGHT WHITE/18 ALTO SL6

