



LED B11

5.5F15/PER/927-922/CL/G/E26/WGX 1BC T20

Philips LED B11 candles offer energy saving ambiance with the elegant effect of incandescent candles. These designs provides light in an omnidirectional manner, giving lighting designers a long life alternative to standard incandescent sources.

Product data

General information	
Cap-Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	20000X
Technical Type	5.5-60W

Light technical	
Color Code	927-922 [CCT of 2700K-2200K]
Beam Angle (Nom)	300 °
Luminous Flux (Nom)	500 lm
Color Designation	Warm Glow(WG)
Correlated Color Temperature (Nom)	2700 2200 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %

Operating and electrical	
Input Frequency	50 to 60 Hz
Power (Nom)	5.5 W
Lamp Current (Nom)	60 mA
Wattage Equivalent	60 W
Starting Time (Nom)	0.5 s

Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.75
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	60 °C

Controls and dimming	
Dimmable	Yes

Mechanical and housing	
Bulb Finish	Clear
Bulb Shape	F15 (F15)


Approval and application	
Energy Consumption kWh/1000 h	- kWh

Product data	
Order product name	5.5F15/PER/927-922/CL/G/E26/WGX 1BC T20
EAN/UPC - Product	046677547950
Order code	929002091503
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	929002091503

LED B11

Net Weight (Piece)	0.070 kg
--------------------	----------


Dimensional drawing




5.5F15/PER/927-922/CL/G/E26/WGX 1BC T20

Product	D	C
5.5F15/PER/927-922/CL/G/E26/WGX 1BC T20	47 mm	112 mm


Photometric data

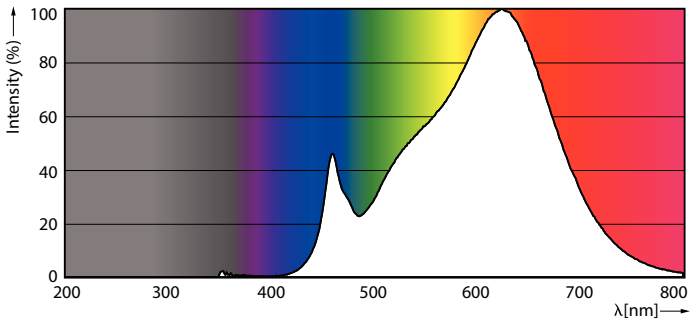

LEDbulb CLA 5,5W F15 E26 922 927 CL-POC




LEDbulb CLA 5,5W F15 E26 922 927 CL-GUL




LEDbulb CLA F15 5,5W E26 922 927 CL-LDD

LED B11

Lifetime

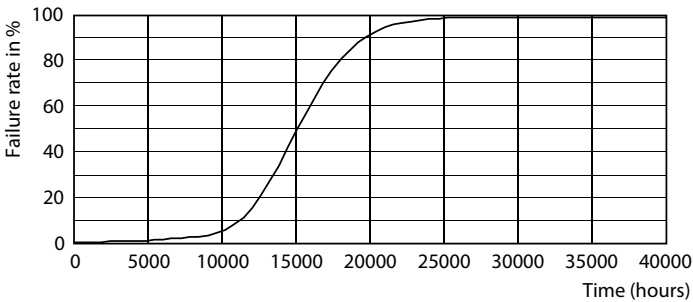

Life Expectancy Diagram

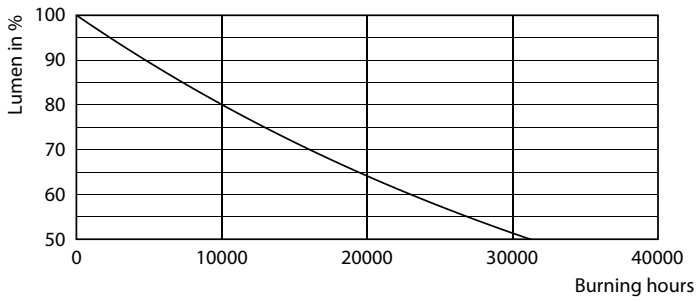

Lumen Maintenance Diagram

