

# Standard Conduit Locknuts & Sealing Locknuts

## Threaded For Rigid Conduit & IMC

### Type 101

#### Bonding Wedge Locknut

##### Use:

Use with bushings to bond ½" through 6" rigid conduit and IMC to boxes, cabinets or other enclosures where locknut is exposed.

##### Material/Finish:

Malleable Iron/Zinc Plated

##### Third Party Certification:



UL Listed: E-24264



CSA Certified: 9795

##### Applicable Third Party Standards:

UL Standard: 467


CSA Standard: C22.2 No. 41

Fed. Spec: W-F-408E

NEMA: FB-1

Trade Size (inches)	Catalog Number	Max. Dia.	Thkns	Radius
½	101	1 <sup>1</sup> / <sub>16</sub>	¼	1 <sup>5</sup> / <sub>16</sub>
¾	102	1 <sup>3</sup> / <sub>8</sub>	¼	1 <sup>5</sup> / <sub>16</sub>
1	103	1 <sup>1</sup> / <sub>2</sub>	¼	1 <sup>5</sup> / <sub>16</sub>
1¼	104	2 <sup>1</sup> / <sub>16</sub>	¼	1¼
1½	105	2 <sup>3</sup> / <sub>8</sub>	¼	1 <sup>1</sup> / <sub>16</sub>
2	106	2 <sup>7</sup> / <sub>8</sub>	¼	1 <sup>5</sup> / <sub>16</sub>
2½	107	3 <sup>3</sup> / <sub>8</sub>	5/16	1 <sup>1</sup> / <sub>16</sub>
3	108	4¼	5/16	2½
3½	109	4 <sup>3</sup> / <sub>16</sub>	5/16	2½
4	110	5 <sup>5</sup> / <sub>16</sub>	5/16	2 <sup>7</sup> / <sub>8</sub>
5	112*	7	7/16	3½
6	113*	8 <sup>5</sup> / <sub>16</sub>	7/16	4 <sup>1</sup> / <sub>16</sub>

\*Not CSA Certified

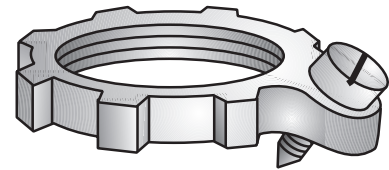

Type 101

### Type SLG

#### Sealing Locknut

##### Features:

- Supplied with integrally fused gasket
- Provides raintight or oil tight seal

##### Material/Finish:

Steel/Zinc-Plated

##### Third Party Certification:



UL Listed: E-11853



CSA Certified: AP57250

##### Applicable Third Party Standards:

UL Standard: 514B


CSA Standard: C22.2 No. 18

Fed. Spec: W-F-408E

NEMA: FB-1

Trade Size (inches)	Catalog Number	Threads Per Inch	Max. Diameter	Thickness
½	SLG-50S	14	1 <sup>1</sup> / <sub>8</sub>	¼
¾	SLG-75S	14	1 <sup>3</sup> / <sub>8</sub>	5/16
1	SLG-100S	11½	1¾	5/16
1¼	SLG-125S	11½	2 <sup>1</sup> / <sub>16</sub>	5/16
1½	SLG-150S	11½	2 <sup>3</sup> / <sub>8</sub>	5/16
2	SLG-200S	11½	2 <sup>7</sup> / <sub>8</sub>	5/16
2½	SLG-250S•	8	3 <sup>7</sup> / <sub>16</sub>	1 <sup>1</sup> / <sub>32</sub>
3	SLG-300S•	8	4 <sup>1</sup> / <sub>8</sub>	1 <sup>1</sup> / <sub>32</sub>
3½	SLG-350S•	8	4 <sup>5</sup> / <sub>8</sub>	3/8
4	SLG-400S•	8	5¼	13/32

•Not certified UL or CSA



Type SLG