



PL-T Triple 4-Pin Base

PL-T 32W/835/4P 1CT

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

• General Characteristics

| | |
|------------------|----------|
| Base | GX24q-3 |
| Base Information | 4P |
| Avg. Hrs. Life | 16000 hr |

• Light Technical Characteristics

| | |
|-----------------------------|--------------------|
| Color Code | 835 [CCT of 3500K] |
| Color Rendering Index | 82 Ra8 |
| Color Designation | White |
| Color Temperature | 3500 K |
| Chromaticity Coordinate X | 411 - |
| Chromaticity Coordinate Y | 398 - |
| Initial Lumens | 2400 Lm |
| Luminous Efficacy Lamp EL | 75 Lm/W |
| Lumen Maintenance 2000h | 90 % |
| Lumen Maintenance EL 2000h | 93 % |
| Lumen Maintenance EL 5000h | 86 % |
| Lumen Maintenance EL 10000h | 79 % |

• Electrical Characteristics

| | |
|-----------------|--------|
| Watts | 32 W |
| Lamp Wattage EL | 29.0 W |

| | |
|-----------------|---------|
| Lamp Voltage EL | 125 V |
| Lamp Current EL | 0.320 A |
| Dimmable | Yes |

• Environmental Characteristics

| | |
|-------------------------------|---|
| Energy Efficiency Label (EEL) | B |
|-------------------------------|---|

• Product Dimensions

| | |
|--------------------------|----------------|
| Base Face to Base Face A | 102 (max) mm |
| Insertion Length B | 126.5 (max) mm |
| Overall Length C | 141.4 (max) mm |
| Diameter D | 41 (max) mm |
| Diameter D1 | 41 (max) mm |

• Product Data


| | |
|--------------------|--------------------------|
| Product number | 268334 |
| Full product name | PL-T 32W/835/4P 1CT |
| Short product name | PL-T 32W/35/4P/ALTO 12PK |
| Pieces per Sku | 1 |
| eop_pck_cfg | 12 |
| Skus/Case | 12 |
| Bar code on pack | 46677268336 |
| Bar code on case | 50046677268331 |
| Logistics code(s) | 927911883513 |
| tpd_ilcos_cd | FSM-32/35/1B-E-GX24q=3 |
| eop_net_weight_pp | 82.000 gr |

PHILIPS

sense and simplicity



PL-T Triple 4-Pin Base

Dimensional drawing




GX24q-2/GX24q-3/GX24q-4, 4P

| Product | A (Max) | B (Max) | C (Max) | D (Max) | D1 (Max) |
|-----------------|---------|---------|---------|---------|----------|
| PL-T 32W/835/4P | 102 | 126.5 | 141.4 | 39.85 | 39.65 |



Photometric data

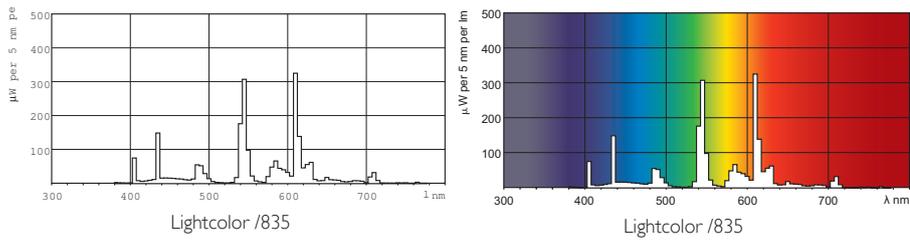

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, October 6
data subject to change