
555® Accessory Shoe Groups


23802 1/2" - 2" EMT SHOE GROUP CONSISTS OF ONE EACH:

Key	Cat./UPC No.	Description
1	17944	1/2" through 1-1/4" EMT Bending Shoe
2	17986	1/2" through 1-1/4" Support Roller
3	23499	1-1/2" EMT Bending Shoe
4	23505	2" EMT Bending Shoe
5	23541	1-1/2" through 2" Roller Support Unit
	23818	Metal Storage Box (not shown)

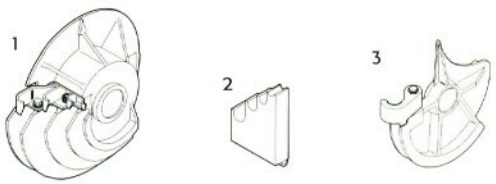


23816 1-1/2" AND 2" EMT SHOE GROUP CONSISTS OF ONE EACH:

Key	Cat./UPC No.	Description
3	23499	1-1/2" EMT Bending Shoe
4	23505	2" EMT Bending Shoe
5	23541	1-1/2" through 2" Roller Support Unit




26330 1-1/2" AND 2" IMC SHOE GROUP CONSISTS OF ONE EACH:

Key	Cat./UPC No.	Description
6	25263	1-1/2" IMC Bending Shoe
7	25268	2" IMC Bending Shoe
8	25273	1-1/2" through 2" Roller Support Unit
	23818	Metal Storage Box (not shown)

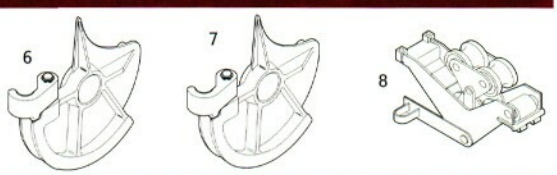


28007 1/2" - 2" RIGID SHOE GROUP CONSISTS OF ONE EACH:

Key	Cat./UPC No.	Description
9	00571	1/2" through1-1/4" Rigid/IMC Bending Shoe
10	00936	1/2" through 1-1/4" Support Roller
11	17937	1-1/2" through 2" Rigid Bending Shoe
12	17984	1-1/2" through 2" Support Roller

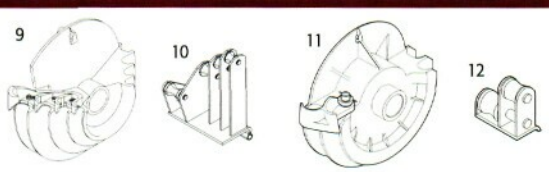

37279 40 MIL PVC COATED RIGID 1/2" - 2" SHOE GROUP CONSISTS OF ONE EACH:

Key	Cat./UPC No.	Description
13	00946	1/2" through 1-1/4" Roller Support
14	00573	1/2" through 1-1/4" Shoe
15	37281	1-1/2" and 2" Shoe
16	37282	1-1/2" through 2" Roller Support
	23818	Metal Storage Box (not shown)

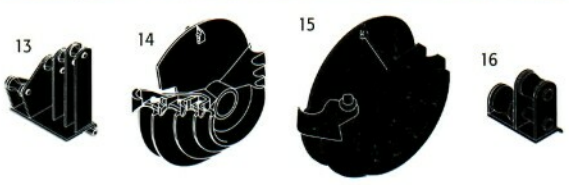

To use the PVC Shoe Group with 555 SB and 555 SBR benders Adapter Set 32391 is required.

Flip-Top® Benders for 1-1/4" – 2" EMT, IMC and Rigid



- Choose 882 for EMT bends or 882CB models for EMT, IMC and Rigid Conduit.
- Simple, accurate and easy to use.
- Flip-Top® hinged frame top plate opens for easy, fast loading and unloading.
- Ram travel scale and charts for accurate bends, offsets and saddles.

FLIP-TOP® BENDER CENTERLINE BENDING RADII

	882, 882CB	882CB	
SIZE	EMT	RIGID	IMC
1-1/4"	7-7/32" (183.4 mm)	7-1/4" (184.2 mm)	7-1/4" (184.2 mm)
1-1/2"	8-1/16" (204.8 mm)	8-1/4" (209.5 mm)	8-1/4" (209.5 mm)
2"	9-5/16" (236.5 mm)	8-7/8" (225.4 mm)	8-7/8" (225.4 mm)

Cat. No.	UPC No.	Description
882	15128	Flip-Top® Bender for 1-1/4", 1-1/2" and 2" EMT Conduit without Hydraulic Pump
882CB	29536	Flip-Top® Bender with shoes for 1-1/4", 1-1/2" and 2" EMT, IMC and Rigid Conduit with out Hydraulic Pump
882CB-H755	29537	Flip-Top® Bender with shoes for 1-1/4", 1-1/2" and 2" EMT, IMC and Rigid Conduit with 755 Hand Hydraulic Pump
882CB-E975	34202	Flip-Top® Bender with shoes for 1-1/4", 1-1/2" and 2" EMT, IMC and Rigid Conduit with 975 Electric Hydraulic Pump
882-H755	16460	Flip-Top® Bender for 1-1/4", 1-1/2" and 2" EMT Conduit with 755 Hand Hydraulic Pump
882-E975	34201	Flip-Top® Bender for 1-1/4", 1-1/2" and 2" EMT Conduit with 975 Electric Hydraulic Pump
882RI-G1	29948	Conversion Attachment Set – Converts 882 to 882CB by adding the shoes, follow bars and saddles for 1-1/4", 1-1/2" and 2" IMC and Rigid conduit

SPECIFICATIONS

Capacity:
882 - 1-1/4", 1-1/2" and 2" EMT
882CB - 1-1/4", 1-1/2" and 2" EMT, IMC and Rigid

Power Source:
755 - Hydraulic Hand Pump
975 - 120 VAC Electric Hydraulic Pump
976-22PS - 220 VAC 50/60 Cycle Electric Hydraulic Pump

Weight:
882 - 141 lbs. (64kg)
882-H755 - 161 lbs. (73 kg)
882CB-H755 - 217 lbs. (99 kg)
882CB-E975 - 264 lbs. (120 kg)
882-E975 - 195 lbs. (89 kg)
882CB - 205 lbs. (93 kg)

Electric Conduit Bender for 1/2" through 2" Conduit and Pipe

555 Deluxe BENDER



555R Tire



- 555® Deluxe Series features unique electrical controls that reduce the in-rush current to the relays to minimize the contact arcing for longer life, heavy-duty urethane filled pneumatic tires and UL/ULC approved.
- Both benders are available in four models for Rigid, EMT or IMC conduit, or bender only without shoes.
- The optional PVC-coated rigid conduit shoe group can be used on all 555® series benders.

SPECIFICATIONS

Capacity: 555R and 555RC: 1/2"-2" Rigid and 1/2" - 1-1/4" IMC conduit
555E and 555EC: 1/2" - 2" EMT conduit
555I and 555IC: 1-1/2" and 2" IMC conduit
Power Source: 555 Deluxe Series: 120 VAC; 20 amp GFCI-protected receptacle
Weight: 555: 260 lbs. (118 kg)
555R: 393 lbs. (179 kg)
555E: 476 lbs. (216 kg)
555I: 456 lbs. (207 kg)
555C: 260 lbs. (118 kg)
Height: 555 Deluxe Series: 44" (1118 mm)
Width: 555 Deluxe Series: 29-5/8" (753 mm)
Depth: 555 Deluxe Series: 28-1/2" (724 mm)
Operating Temperature: -5°F to 120°F (-20°C to 49°C)
Relative Humidity: 0-98%

Cat. No.	UPC No.	Description
555®	39780	Deluxe Electric Bender power unit without bending accessories
555R	23446	Deluxe Electric Bender with Shoe Group for 1/2" through 2" Rigid and 1/2" through 1-1/4" IMC conduit and pipe Includes 28007–1/2"-2" Rigid Shoe Group
555E	27989	Deluxe Electric Bender with Shoe Group for 1/2" through 2" EMT conduit Includes 23802–1/2"-2" EMT Shoe Group
555I	27990	Deluxe Electric Bender with Shoe Group for 1-1/2" through 2" IMC conduit Includes 26330–1-1/2" - 2" IMC Shoe Group
37279	37279	40 MIL PVC Coated Rigid 1/2" - 2" Shoe Group (sold separately) to use with the 555 series benders

555 Classic BENDER



555RC Classic

- The 555C Classic Series features simple relay controls for easy field repairs, and compact handle design to prevent interference with conduit when bending.
- Both benders are available in four models for Rigid, EMT or IMC conduit, or bender only without shoes.
- The optional PVC-coated rigid conduit shoe group can be used on all 555® series benders.

SPECIFICATIONS

Capacity: 555R and 555RC: 1/2"-2" Rigid and 1/2" - 1-1/4" IMC conduit
555E and 555EC: 1/2" - 2" EMT conduit
555I and 555IC: 1-1/2" and 2" IMC conduit
Power Source: 555C Classic Series: 120 VAC; 15 amp GFCI-protected receptacle
Weight: 555: 260 lbs. (118 kg)
555R: 393 lbs. (179 kg)
555E: 476 lbs. (216 kg)
555I: 456 lbs. (207 kg)
555C: 260 lbs. (118 kg)
Height: 555C Classic Series: 44" (1118 mm)
Width: 555C Classic Series: 28.5" (724 mm)
Depth: 555C Classic Series: 28-1/2" (724 mm)
Operating Temperature: -5°F to 120°F (-20°C to 49°C)
Relative Humidity: 0-98%

Cat. No.	UPC No.	Description
555C	06900	Classic Electric Bender power unit without bending accessories
555RC	06901	Classic Electric Bender with Shoe Group for 1/2" through 2" Rigid and 1/2" through 1-1/4" IMC conduit and pipe Includes 28007–1/2"-2" Rigid Shoe Group
555EC	06902	Classic Electric Bender with Shoe Group for 1/2" through 2" EMT conduit Includes 23802–1/2"-2" EMT Shoe Group
555IC	06903	Classic Electric Bender with Shoe Group for 1-1/2" through 2" IMC conduit Includes 26330–1-1/2" - 2" IMC Shoe Group
37279	37279	40 MIL PVC Coated Rigid 1/2" - 2" Shoe Group (sold separately) to use with the 555 series benders