
UL LISTED TO US AND CANADIAN SAFETY STANDARDS; NSF INTERNATIONAL CERTIFIED FOR CRITERIA C–2 SPLASH ZONE.
MAX AMBIENT: 40°C
MAX WT: 27kg (60lbs)

VANTAGE®

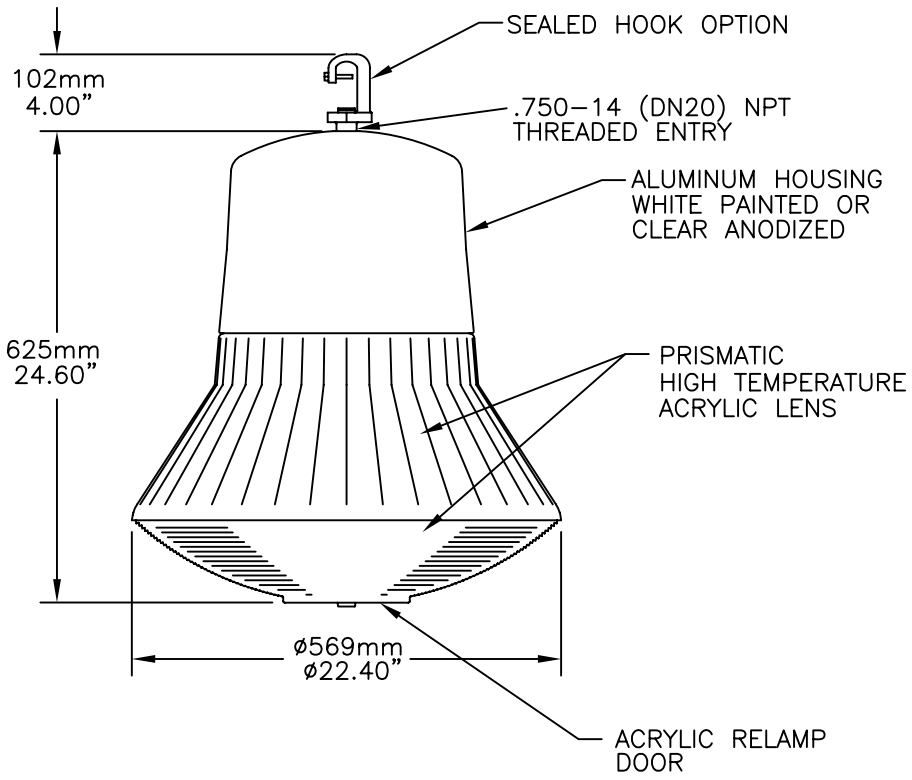

CATALOG NUMBER

VANTAGE SERIES LUMINAIRE: V A _ _ _ _ _ _ _ _ _

SOURCE AND WATTAGE

- ☐ 250HP=250W HPS
- ☐ 25LHP=250W HPS
- ☐ 400HP=400W HPS
- ☐ 40LHP=400W HPS
- ☐ *250MP=250W MH
- Ⓔ ☐ 250PP=250W MH
- ☐ *25LMP=250W MH
- Ⓔ ☐ 320PP=320W MH
- Ⓔ ☐ 350PP=350W MH
- Ⓔ ☐ 35LPP=350W MH
- ☐ *400MP=400W MH
- ☐ *40LMP=400W MH
- Ⓔ ☐ 400PP=400W MH
- Ⓔ ☐ 40LPP=400W MH
- Ⓔ ☐ 21PPE=210W MASTER COLOR ELITE, PROTECTED

*NOT AVAILABLE FOR SHIPMENT IN THE US DUE TO EISA 2007 LEGISLATION

Certain airborne contaminants can diminish the integrity of acrylic. Please refer to the Acrylic Environmental Compatibility Chart (HL-2445) for suitable uses.

VOLTAGE

- ☐ 12=120V
- ☐ 20=208V
- ☐ 24=240V
- ☐ 27=277V
- ☐ 34=347V
- ☐ 48=480V
- ☐ MA=MULTIVOLT (12,20,24,27) FACTORY WIRED FOR 120V ONLY
- ☐ MB=MULTIVOLT (12,20,24,27) FACTORY WIRED FOR 208V ONLY
- ☐ MC=MULTIVOLT (12,20,24,27) FACTORY WIRED FOR 240V ONLY
- ☐ MD=MULTIVOLT (12,20,24,27) FACTORY WIRED FOR 277V ONLY
- ☐ MT=MULTIVOLT (12,20,24,27)
- ☐ VT=VARITAP (12,27,34)
- ☐ V=MULTIVOLT (208–277V), 21PPE ONLY

DISTRIBUTION

- ☐ N=NARROW
- ☐ W=WIDE

HOLOPHANE®
LEADER IN LIGHTING SOLUTIONS
An AcuityBrandsCompany
214 OAKWOOD AVENUE - NEWARK, OHIO 43055

ORDER NO: _____
TYPE: _____

DRAWING NO. MA–4844
CAD MODEL: VA.DWG
DATE: 5/25/10

©2009 ACUITY BRANDS LIGHTING INC., All Rights Reserved

VANTAGE®

OPTIONS (ADD TO CATALOG NUMBER)(SOME RESTRICTIONS MAY APPLY):

- ☐ CA=ANODIZED FINISH FOR HOUSING
- ☐ PF-291=UNIVERSAL GASKETED HOOK ASSEMBLY
- ☐ CDPW-L5-15-X=120V CORD & DANIEL WOODHEAD WATERTITE PLUG (INCL PF-291)
- ☐ CDPW-L6-15-X=208/240V CORD & DANIEL WOODHEAD WATERTITE PLUG (INCL PF-291)
- ☐ CDPW-L7-15-X=277V CORD & DANIEL WOODHEAD WATERTITE PLUG (INCL PF-291)
- ☐ EM=STANDBY LIGHTING FIXTURE (APPROPRIATE LAMP SUPPLIED WITH FIXTURE)
- ☐ ER=EMERGENCY LIGHTING FIXTURE LESS RELAY (APPROPRIATE LAMP SUPPLIED WITH FIXTURE)
- ☐ F1=SINGLE FUSING VOLTAGE (12, 24, 27, 34V)
- ☐ F2=DOUBLE FUSING VOLTAGE (20, 24, 48V)
- ☐ PS=PROTECTED STARTER (HPS UNITS ONLY)
- ☐ S=SINGLE PACK FOR ELECTRICAL ONLY
- ☐ CDW-3=3 FT CORD AND HOOK (INCLUDES PF-291)
- ☐ CDW-4=4 FT CORD AND HOOK (INCLUDES PF-291)
- ☐ CDW-5=5 FT CORD AND HOOK (INCLUDES PF-291)
- ☐ CDW-6=6 FT CORD AND HOOK (INCLUDES PF-291)
- ☐ 120VOLT=MULTIVOLT WIRED FOR 120V
- ☐ 208VOLT=MULTIVOLT WIRED FOR 208V
- ☐ 240VOLT=MULTIVOLT WIRED FOR 240V
- ☐ 277VOLT=MULTIVOLT WIRED FOR 277V
- ☐ 347VOLT=MULTIVOLT WIRED FOR 347V

X=LENGTH OF CORD IN FEET; 3FT IS STANDARD

ACCESSORIES (ADD TO CATALOG NUMBER)(SHIPS SEPARATELY):

- ☐ LAMP=APPROPRIATE LAMP SUPPLIED
- ☐ B721DOORHID-A=OPTICAL DOOR ASSEMBLY
- ☐ CDCW-L5-15-3=120V WHITE CORD & DANIEL WOODHEAD WATERTITE CONNECTOR (WET LOCATIONS)
- ☐ CDCW-L6-15-3=208/240V WHITE CORD & DANIEL WOODHEAD WATERTITE CONNECTOR (WET LOCATIONS)
- ☐ CDCW-L7-15-3=277V WHITE CORD & DANIEL WOODHEAD WATERTITE CONNECTOR (WET LOCATIONS)

HOLOPHANE®
LEADER IN LIGHTING SOLUTIONS
An AcuityBrandsCompany
214 OAKWOOD AVENUE - NEWARK, OHIO 43055

ORDER NO: _____

TYPE: _____

DRAWING NO. MA-4844
CAD MODEL: VA.DWG
DATE: 5/25/10

©2009 ACUITY BRANDS LIGHTING INC., All Rights Reserved