

PB-012







Catalog Number	PB-012	Color	ANSI 61 Gray
Marketing Product Description	200 Ampere 1phase 600 Volt 12in-26in-6in Painted Steel Lift Off Screw Front 1 Lug Per Landing - 6-250kcmil 1 Lug Per Landing - 6-250kcmil 10k Ampere Interrupting Capacity	Connection	6 AWG to 250 kcmil Line Side Lugs and 6 AWG to 250 kcmil Load Side Lugs
UPC	784572159907	Construction	G90 Galvanized Steel
Length (IN)	6.063	Finish	Powder Coat Finish
Width (IN)	12.125	Number of Positions	1 Position
Height (IN)	26	Number of Phases	1
Weight (LB)	27	Short Circuit Rating	10000 Ampere
Brand Name	Milbank		
Type	Line to Load Distribution		
Application	Termination Cabinet		
Standard	UL Listed;Type 3R		
Number Of Conductors	1		
Conductor Material	Copper and Aluminum		
Size	6.063L x 12.125W x 26H		
Amperage Rating	Up to 200 Ampere		
Voltage Rating	Up to 600 Volts Alternating Current		
Temperature Rating	No Temperature Rating		
Insulation Material	Polypropylene		
Jacket Material	No Jacket Material		

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.

FEATURE TABLE

ITEM	QTY	DESCRIPTION
A	4	STD. MNTG. EMBOS

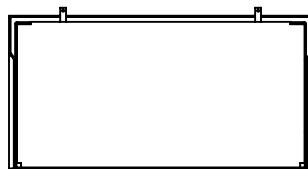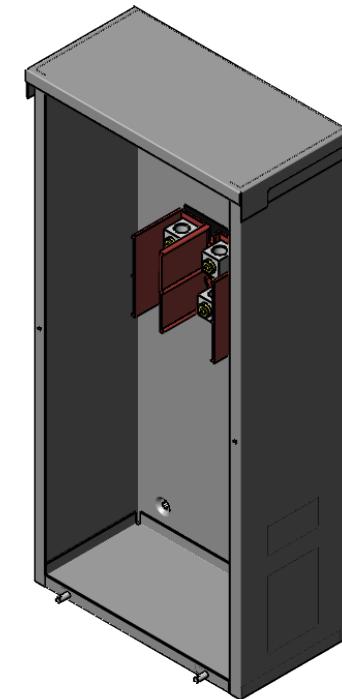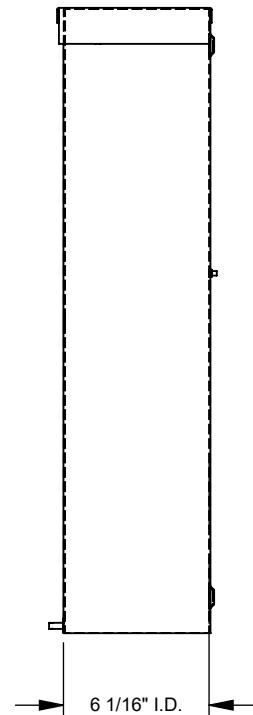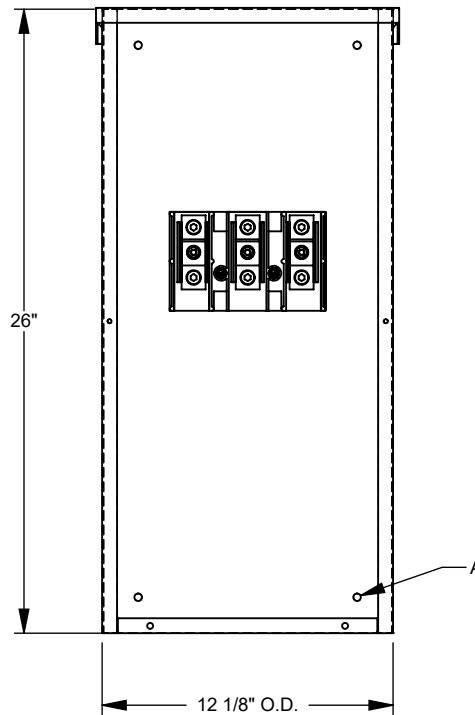

All dimensions are +/- 1/16".
Drawing views are not to scale.

Version:

1

Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.