

Bravo™ ALUMINUM GEAR REDUCERS Dimensions

Style RHMQ

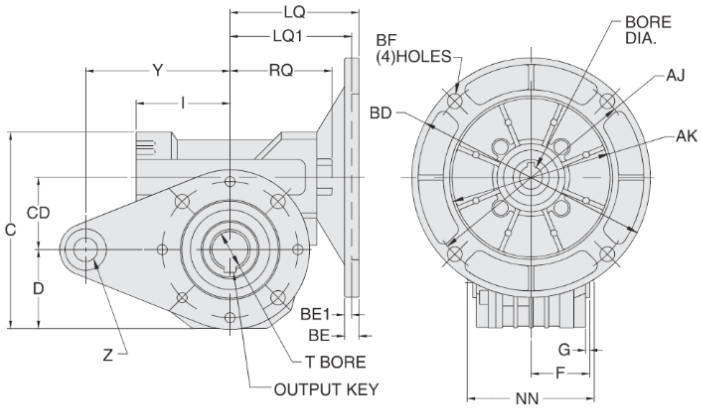

ASSEMBLIES




REVERSE ALL ARROWS FOR OPPOSITE INPUT SHAFT ROTATION. CONTACT FACTORY FOR OTHER MOUNTINGS OR ASSEMBLY POSITIONS.

STYLE RHMQ DIMENSIONS - Inches (MM)


Series	C	CD	D	F	G	I	LQ* 56/140	LQ1* 180	NN	RQ	T* +0.0015 -0.0000	Y	Z	OUTPUT KEY*
512	3.54	1.18	1.54	1.18	0.08	1.81	*	N/A	2.16	2.21	(14)●	3.94	0.315	(5)●
518	4.76	1.77	1.93	1.38	0.08	2.16	3.33	N/A	2.56	2.60	0.750	3.94	0.315	3/16 X 1.00
520	5.33	1.97	2.15	1.50	0.12	2.56	3.51	N/A	3.19	2.83	1.000	3.94	0.315	1/4 X 1.62
525	6.69	2.48	2.76	1.77	0.19	3.11	4.08	N/A	4.72	3.58	1.125	5.91	0.394	1/4 X 2.00
534	9.15	3.35	3.72	2.52	0.14	3.86	4.83	5.35	5.31	4.33	1.500	7.87	0.787	3/8 X 2.00

● Dimension is in MM. Key is not provided with metric reducer options as standard. Metric bore tolerance is H7.
* Metric options are available. Refer to dimensions on opposite page. Contact Factory for availability of metric options.

Style RH

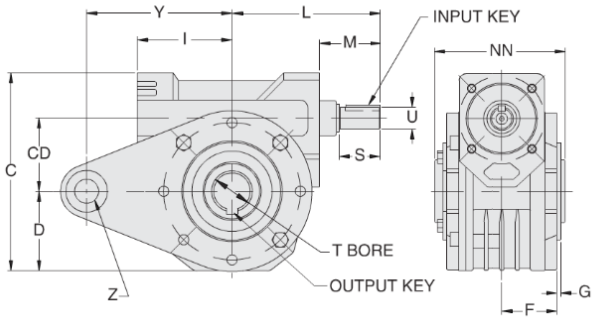

ASSEMBLIES



REVERSE ALL ARROWS FOR OPPOSITE INPUT SHAFT ROTATION. CONTACT FACTORY FOR OTHER MOUNTINGS OR ASSEMBLY POSITIONS.

STYLE RH DIMENSIONS** - Inches

Series	C	CD	D	F	G	I	L	M	NN	S	T +0.0015 -0.0000	U +0.000 -0.001	Y	Z	INPUT KEY	OUTPUT KEY
518	4.76	1.77	1.93	1.38	0.08	2.16	3.86	1.67	2.56	1.18	0.750	0.625	3.94	0.315	3/16 X 1.00	3/16 X 1.00
520	5.33	1.97	2.15	1.50	0.12	2.56	4.11	1.74	3.19	1.18	1.000	0.625	3.94	0.315	3/16 X 1.00	1/4 X 1.62
525	6.69	2.48	2.76	1.77	0.19	3.11	5.43	2.24	4.72	1.75	1.125	0.750	5.91	0.394	3/16 x 1.50	1/4 X 2.00
534	9.15	3.35	3.72	2.52	0.14	3.86	6.38	2.52	5.31	1.75	1.500	0.875	7.87	0.787	3/16 X 1.50	3/8 X 2.00

** Series 512 is available in this style. Contact Factory for details

REFER TO PAGE 348 FOR DETAILED DIMENSIONS OF REACTION ARM.