JUNO

Project:

Fixture Type:

Location:

Contact/Phone:

6" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC21R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol AIR-LOC do not require a gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected – see page 2.

Socket Medium base porcelain with nickel-plated copper screw shell • Floating socket with spring attaches to trim for installation.

Trims Trim selection shown on page 2.

Labels UL listed for through branch-wiring, damp locations and IP • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified • Trim No. 241 is wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90˚ C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel springs to accommodate up to 1¾" ceiling thickness.

DIMENSIONS

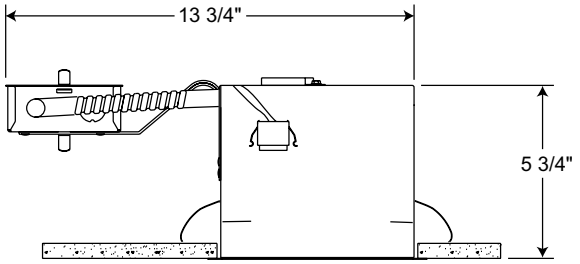

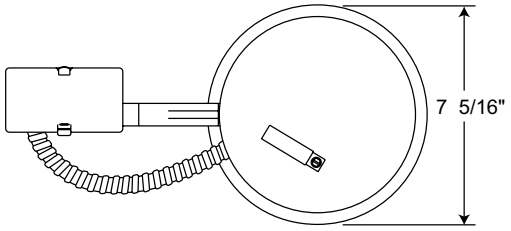

6 3/4" CEILING CUTOUT

Accessories

Catalog Number	Description
ALG6R	Air-Loc Gasket

To order, specify catalog number.

PRODUCT CODES

Catalog Number		Input Voltage	Lamp Rating
IC21R	6" Incandescent Shallow Remodel IC Housing	120V	A19/R20/PAR20/BR30/PAR30/PAR30L (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.

Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 03/01/17

6" SHALLOW UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC21R

TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating
AIR-LOC **	**244S BWH**	Shallow Black Baffle, White Trim Ring	50W PAR30
	244S WWH	Shallow White Baffle, White Trim Ring	
AIR-LOC **	**247S CWH**	Shallow Clear Alzak® Cone, White Trim Ring	75W PAR30, 65W BR30
	247S GWH	Shallow Gold Alzak® Cone, White Trim Ring	
	247S BWH	Shallow Black Alzak® Cone, White Trim Ring	
	247S HZWH	Shallow Haze Cone, White Trim Ring	
	247S WHZWH	Shallow Wheat Haze Cone, White Trim Ring	
	250 WH	Open Frame, White	65W BR30
	250 SC	Open Frame, Satin Chrome	
	250 ABZ	Open Frame, Classic Aged Bronze	
	228 WH	Regressed Eyeball, White	50W PAR20/R20
	229 WH	Regressed Eyeball, White	75W PAR30L, 65W BR30
	229 SC	Regressed Eyeball, Satin Chrome	
	229 ABZ	Regressed Eyeball, Classic Aged Bronze	
	229 BL	Regressed Eyeball, Black	
	248 WWH	Regressed Eyeball, White Baffle, White Trim Ring	50W PAR20/R20
	249 BWH	Regressed Eyeball, Black Baffle, White Trim Ring	75W PAR30L, 65W BR30
	249 WWH	Regressed Eyeball, White Baffle, White Trim Ring	
AIR-LOC	**241 WH ◆**	Drop Opal w/Reflector, White	40W A19
	241 PW ◆	Drop Opal w/Reflector, Plastic White	

Trim Size: 7⅝" O.D. (except Cat. Nos. 228, 229, and 241 series - 8" O.D.).
Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

AIR-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

◆ UL Listed for use in wet location.

** NOTE: TR6 Trim Ring compatible with 244S, 247S trims.

Housing and trim can be ordered together or separate, but will always ship separately.

Printed in U.S.A. ©2017 Acuity Brands Lighting, Inc. Rev. 03/01/17