

Threaded Accessories

B3224 - Hanger Adjuster (TOLCO Fig. 306)

B3224CT - Copper Tubing Hanger Adjuster

Size Range: 1/4"-20 thru 3/4"-10 rod

Material: Malleable Iron

Function: To provide an adjustable threaded connection for hanger rods.

Approvals: Conforms to Federal Specification WW-H-171E & A-A-1192A, Type 15 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 15.

Finish: Plain. Contact B-Line for alternative finishes and materials.


Order By: Part number, rod size and finish



B3224



B3224CT



Part No.	Rod Size A	For Pipe Sizes in. (mm)	B in. (mm)	C in. (mm)	D in. (mm)	Design Load Lbs. (kN)	Approx. Wt./100 Lbs. (kg)
B3224-1/4	1/4"-20	3/8" (10)	1 3/4" (44.4)	3 7/8" (98.4)	7/32" (5.5)	230 (1.02)	9 (4.1)
B3224-3/8	3/8"-16	1/2" to 2" (15 to 50)	1 3/4" (44.4)	3 7/8" (98.4)	13/32" (10.3)	730 (3.25)	28 (12.7)
B3224-1/2	1/2"-13	2 1/2" to 3 1/2" (65 to 90)	1 3/4" (44.4)	3 7/8" (98.4)	13/32" (10.3)	730 (3.25)	29 (13.1)
B3224-5/8	5/8"-11	4" to 5" (100 to 125)	2 1/4" (57.1)	5 1/8" (130.2)	1/2" (12.7)	730 (3.25)	30 (13.6)
B3224-3/4	3/4"-10	6" (150)	2 1/4" (57.1)	5 1/8" (130.2)	9/16" (14.3)	860 (3.82)	74 (33.5)

B3202 - Turnbuckle (TOLCO Fig. 331)

Size Range: 3/8"-16 thru 2"-4 1/2 machine thread


Material: Forged Steel

Function: Standard turnbuckle tapped right and left hand which provides 6" (152.4mm) take up (3" (76.2mm) rod take out).

Approvals: Conforms to Federal Specification WW-H-171E & A-A-1192A, Type 13, 3/8"-16 thru 1 1/2"-6 rod, and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 13.

Finish: Plain. Contact B-Line for alternative finishes and materials.

Order By: Part number, rod size and finish

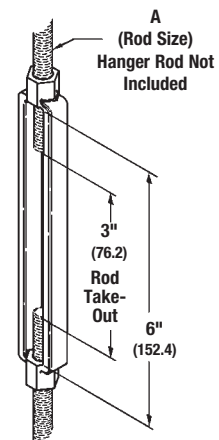

Part No.	Rod Size A	Design Load				Approx. Wt./100	
		650°F (343°C)		750°F (399°C)			
		Lbs.	(kN)	Lbs.	(kN)	Lbs.	(kg)
B3202-3/8	3/8"-16	730	(3.25)	572	(2.54)	38	(17.2)
B3202-1/2	1/2"-13	1350	(6.00)	1057	(4.70)	54	(24.5)
B3202-5/8	5/8"-11	2160	(9.61)	1692	(7.52)	91	(41.3)
B3202-3/4	3/4"-10	3230	(14.37)	2530	(11.25)	130	(58.9)
B3202-7/8	7/8"-9	4480	(19.93)	3508	(15.60)	202	(91.6)
B3202-1	1"-8	5900	(26.24)	4620	(20.55)	270	(122.5)
B3202-1 1/8	1 1/8"-7	7450	(33.14)	5830	(25.93)	354	(160.6)
B3202-1 1/4	1 1/4"-7	9500	(42.25)	7440	(33.09)	445	(201.8)
B3202-1 1/2	1 1/2"-6	13800	(61.38)	10807	(48.07)	640	(290.3)
B3202-1 3/4	1 3/4"-5	18600	(82.73)	14566	(64.79)	1100	(498.9)
B3202-2	2"-4 1/2	24600	(109.42)	19625	(87.29)	1490	(675.8)