

**Fire-Rated Poke-Throughs**  
**SystemOne Flush**  
**4-Inch Diameter Core Hole**

# HUBBELL

**Features**

- Two 1" EMT for Power and Low Voltage
- S1CFCBL, Black Powder Coat Finish Cover Included
- S1SP sub-plate Included
- Junction Box Included

**Ordering Information**

- Fully Assembled Fitting, Cover and Sub-Plate

Catalog Number	UPC Number	Cover Series	Core Hole Diameter
S1PTBLJ	783585373089	S1CFC	4-Inch


Minimum Deck Thickness	Connection Type
2.25" Over Metal Deck	Flush

**Standards**

cULus Listed  
 UL scrub water compliant  
 ADA Compliant

**Specifications**

Cover load rating	300 lbs. static load through 3" diameter mandral
Access cover material	Die cast aluminum
Fire Rating	1 - 4 Hour Fire Rating

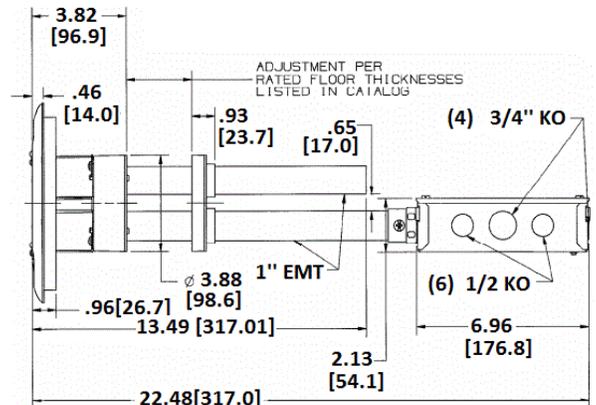

**Accessories**

4" Pre-Pour Tube, removed need for core hold drilling **S1R4PPT**

**Online Resources**

Customer Use Drawing  
 eCatalog  
 Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

