



Number of contacts

3

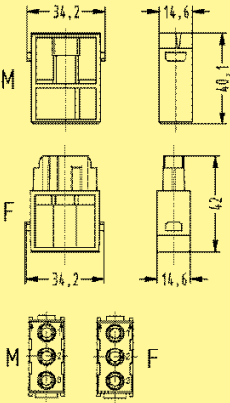

Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
Crimp terminal Order crimp contacts separately	09 14 003 3001	09 14 003 3101	 Contact arrangement view from termination side	

Han
Modular

Identification	Wire gauge (mm²)	Male contact	Female contact	Drawing	Dimensions in mm																								
Crimp contacts																													
Power contacts																													
silver plated	1.5	09 32 000 6104	09 32 000 6204																										
	2.5	09 32 000 6105	09 32 000 6205																										
	4	09 32 000 6107	09 32 000 6207																										
	6	09 32 000 6108	09 32 000 6208																										
	10	09 32 000 6109	09 32 000 6209																										
				<table><tr><th colspan="2">Wire gauge</th><th>Ø</th><th>Stripping length</th></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>1.75</td><td>9.5 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>2.25</td><td>9.5 mm</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>2.85</td><td>9.5 mm</td></tr><tr><td>6 mm²</td><td>AWG 10</td><td>3.5</td><td>9.5 mm</td></tr><tr><td>10 mm²</td><td>AWG 8</td><td>4.3</td><td>12 mm</td></tr></table>	Wire gauge		Ø	Stripping length	1.5 mm²	AWG 16	1.75	9.5 mm	2.5 mm²	AWG 14	2.25	9.5 mm	4 mm²	AWG 12	2.85	9.5 mm	6 mm²	AWG 10	3.5	9.5 mm	10 mm²	AWG 8	4.3	12 mm	
Wire gauge		Ø	Stripping length																										
1.5 mm²	AWG 16	1.75	9.5 mm																										
2.5 mm²	AWG 14	2.25	9.5 mm																										
4 mm²	AWG 12	2.85	9.5 mm																										
6 mm²	AWG 10	3.5	9.5 mm																										
10 mm²	AWG 8	4.3	12 mm																										

06
47

Stock items in bold type