
THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
VB1A1P3BN30P1	17 lb (7.7 kg)

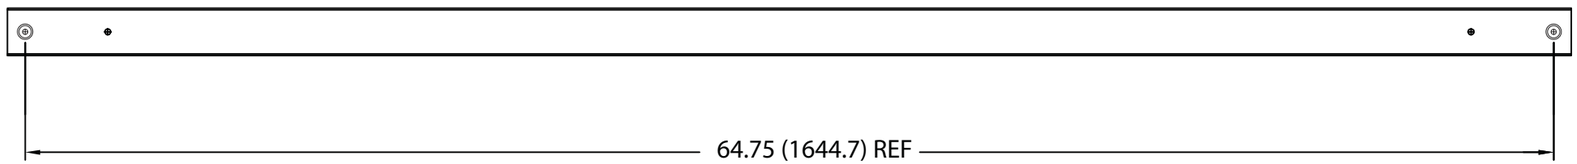


NOTES:

1. IDENTIFICATION: VERTICAL, MIXED (24) C-13 & (6)C-19, METERED 120V / 30A / THREE-PHASE WYE POU

PART NO.	COLOR
VB1A1P3BN30P1	BLACK

2. ACCESSORY COMPONENTS:
   (4) #10-32 x 1/2" MOUNTING SCREWS
   (4) #12-24 x 1/2" MOUNTING SCREWS
   (2) #10-32 LOCKING COLLAR SCREWS
   (2) L-BRACKETS
3. DIMENSIONS IN PARENTHESES ARE METRIC (mm).
4. CURRENT METER - RED, 4-DIGIT LED DISPLAY PROVIDES TRUE RMS CURRENT THAT CONTINUOUSLY SCROLLS THROUGH THE THREE DIFFERENT MEASURED CIRCUITS. METER DISPLAYS CIRCUIT NAME FOLLOWED BY THE MEASURED CURRENT (E.G. CR-1 REPRESENTS PHASE 1).
5. UL® & c-UL® LISTED 60950.
6. RoHS COMPLIANT.
7. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART.
8. MAXIMUM AVAILABLE POWER = 8.6 KW (A)

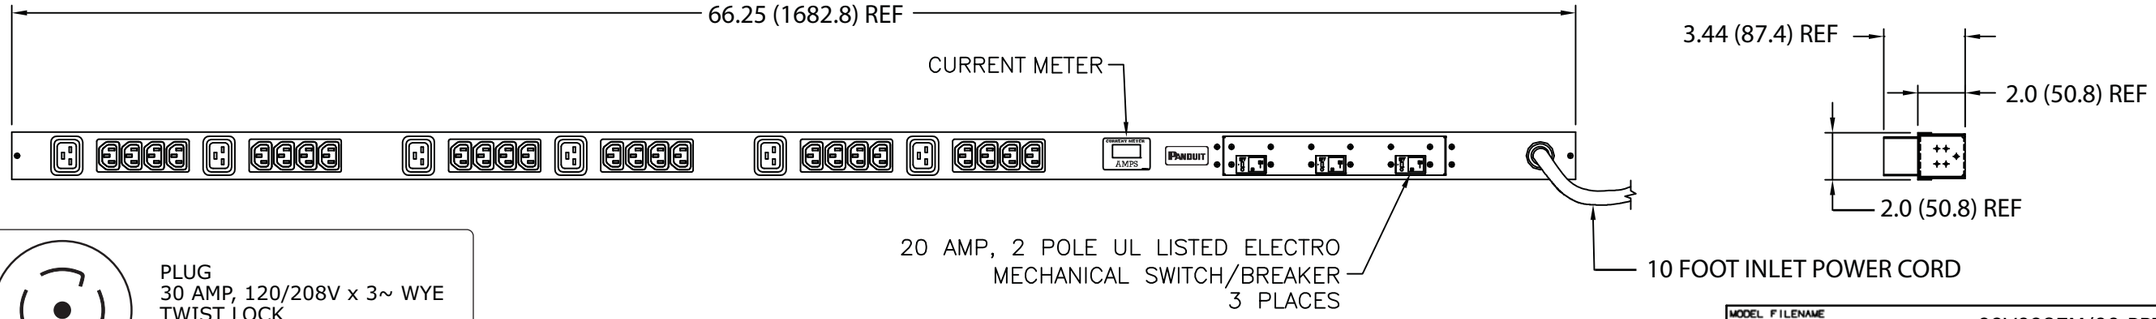

PLUG
30 AMP, 120/208V x 3~ WYE
TWIST LOCK
NEMA L21-30P

TWENTY-FOUR (24)
RECEPTACLES
15 AMP, 250V
STRAIGHT BLADE
IEC 60320/C13

SIX (6)
RECEPTACLES
20 AMP, 250V
STRAIGHT BLADE
IEC 60320/C19

REV	DATE	BY	CHK	DESCRIPTION	ECN - R	CUST	SUP	OTH
00B	1-31-11	MAV	KRKE	A. ADDED MAXIMUM AVAILABLE POWER	09V098EM			
00A	10-15-10	MAV	KRKE	RELEASED TO PRODUCTION	09V098EM			

MODEL FILENAME: 09V098EM/00.PRT
CAD FILENAME/LAYERS: 09V098EM_DC/00B.PRT

PANDUIT CORP TINLEY PARK, ILLINOIS

VERTICAL, MIXED (24) C-13 & (6) C-19, METERED POWER OUTLET UNIT (VB1A1P3BN30P1) CUSTOMER DRAWING

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:
INCHES: X.X +/- 0.03; X.XX +/- 0.015; X.XXX +/- 0.005
[METRIC - MILLIMETER]: X. +/- 0.8; X.X +/- 0.4; X.XX +/- 0.13
ANGLE +/- 1°

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION

DRAWN BY: MAV
MAT'L:
SCALE: NONE
DATE: 10-15-10
DRAWING NO.: 09V098EM
DWG SIZE: B
CHK'D: KRKE