


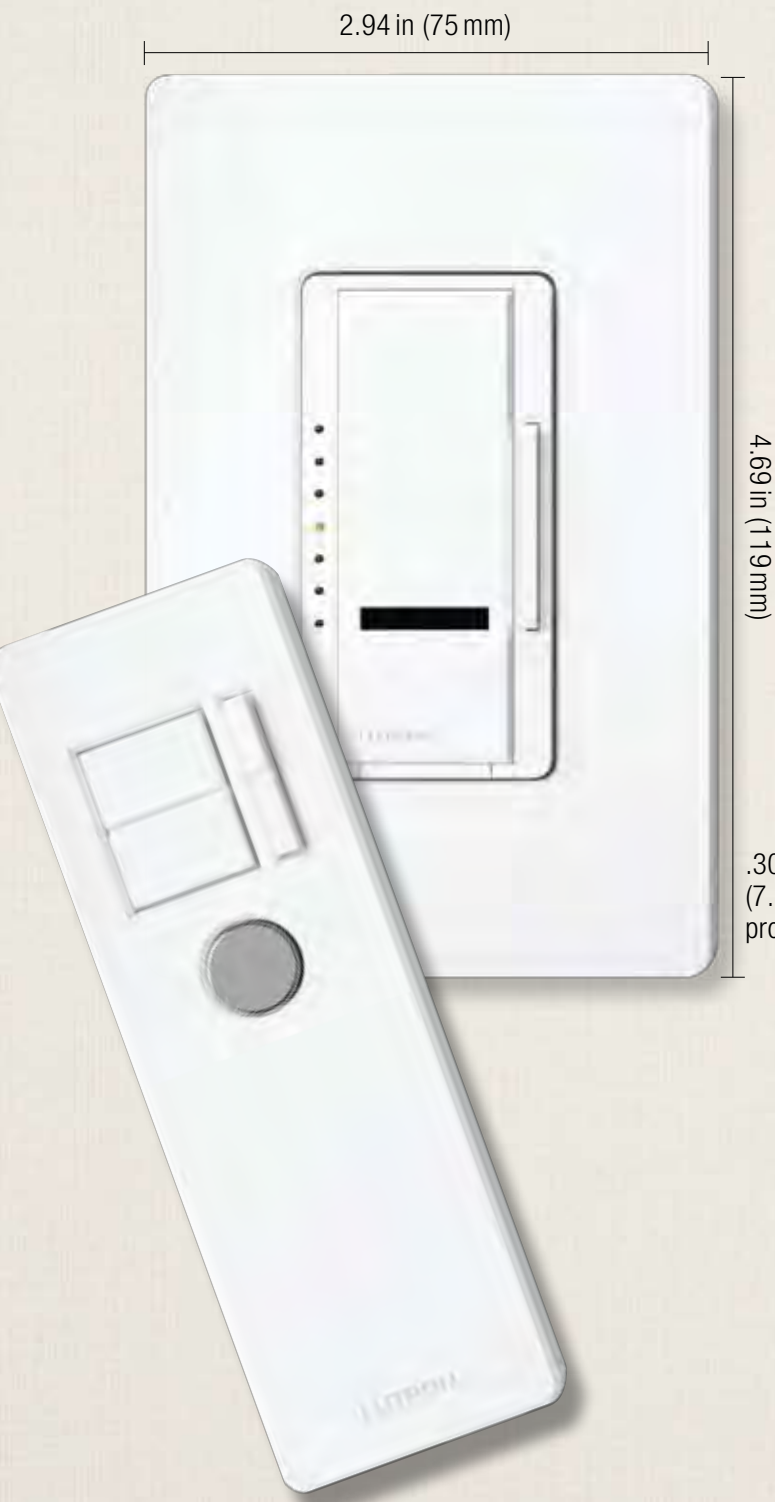

Shown actual size: Maestro IR dimmer and a 1-gang Claro wallplate in White (WH) with IR transmitter in White (WH).

Shown actual size: IR transmitter in White (WH),
W: 1.5 in (38.1 mm) x H: 4.625 in (117.5 mm) x
D: .55 in (14 mm).

Product family features

- True multi-location dimming from every location
- Use the IR (infrared) remote control to adjust lights from anywhere in the room—up to 30 ft line-of-sight
- Tap on to favorite level; tap off; tap twice for full on
- Touch rocker to adjust light level
- LEDs indicate light level and glow softly in the dark as a locator light
- Delayed off provides light as you exit the room
- Line frequency compensation maintains stable light levels, despite power line frequency and voltage variations
- Mechanical air-gap to disconnect load power
- 100% factory tested
- Programming allows customized functions
- All models fit in 1-gang electrical backbox
- Coordinating Claro®, Satin Colors® and Stainless Steel wallplates only available separately
- Custom engraving available for wallplates, see pg. 155

Control types

-  Single-pole (one location)
-  Multi-location dimming (up to ten locations)

Direct load type compatibility

-  Incandescent/halogen lighting
-  Magnetic low-voltage lighting
-  Electronic low-voltage lighting
-  Ceiling fan controls
-  Ceiling fan/light controls

Lighting load interfaces are not compatible with this family.

Available finishes

Use **BOLD** color code in model number (Example: MIR-600-**LS**)

Gloss finishes*



WH
White

LA
Light Almond

AL
Almond

IV
Ivory

GR
Gray

BR
Brown

BL
Black

Satin finishes*



SW
Snow

LS
Limestone

BI
Biscuit

ES
Eggshell

PD
Palladium

TP
Taupe

ST
Stone



BG
Bluestone

PL
Plum

SG
Sea Glass

TQ
Turquoise

GS
Goldstone

DS
Desert Stone

GB
Greenbriar



MS
Mocha Stone

TC
Terracotta

SI
Sienna

HT
Hot

MR
Merlot

MN
Midnight

SS
Stainless Steel

*Coordinating wallplates only available separately. For wallplate information, see pg. 160.

Stainless Steel wallplate includes black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls.

Dimmers, fan and fan/light controls

Remote control digital fade dimmers



- Tap on to favorite level; tap off
- Touch rocker to adjust light level
- Tap twice for full on
- Press, hold and release for gradual fade-to-off
- Provides true dimming from each location (with companion dimmers)

Digital fan only controls (with IR remote)



- Multi-location, fan only
- Controls up to four fans
- One canopy module included, order one canopy module (CM-FQ1) for each additional fan controlled
- 7-quiet fan speeds, plus off
- Designed to prevent motor hum

Fan/light controls



Dimmer (top)

- Tap on to favorite light level; tap off
- Tap twice for full on
- Touch rocker to adjust light level

Fan control (bottom)

- Tap on to favorite fan speed; tap off
- Touch rocker to adjust light level or fan speed
- 7-quiet fan speeds, plus off provide enhanced comfort
- Designed to prevent motor hum

Companion dimmers, fan and fan/light controls

Companion dimmers



- For true multi-location dimming from every location, use up to nine companion dimmers with one Maestro IR multi-location dimmer

Companion fan controls



- For use with multi-location control, use up to two companion fan controls with one Maestro IR digital fan control

Companion fan/light controls



- For true multi-location dimming, use up to two companion controls with one Maestro IR multi-location fan/light control

Companion devices

IR remote control



- Press and hold top silver button to save your favorite light setting; press silver button to recall favorite light setting
- Works with most learning remote controls
- IR frequency is 40 kHz
- IR controls must be within 30 ft line-of-sight to IR receiver
- Touch rocker to adjust light level
- Batteries included

IR remote control for fan/light



- Press and hold top silver button to save your favorite light setting; press silver button to recall favorite light setting
- Press and hold bottom silver button to save your favorite fan setting; press silver button to recall favorite fan setting
- IR controls must be within 30 ft line-of-sight to IR receiver
- Touch rocker to adjust light level or fan speed
- Batteries included

Fan only IR remote control



- Press and hold silver button to save fan setting
- Press silver button to recall favorite fan setting
- IR controls must be within 30 ft line-of-sight to IR receiver
- Touch rocker to adjust fan speed
- Batteries included


Canopy module (fan-mounted)



- For use only in multi-fan applications with MIR-FQ4FMT or MIR-FQ4FM-
- Order one canopy module for each additional fan controlled


Connections overview

Load connections*

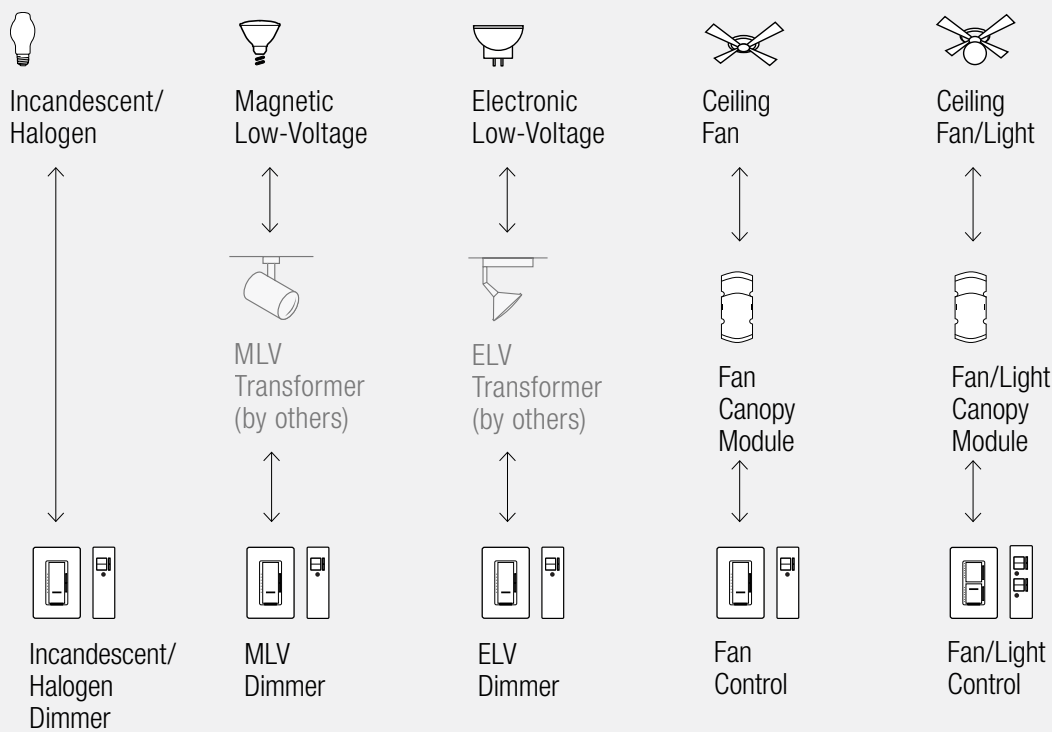


Control types (for 2 or more locations)


Dim from multiple-locations (up to 10)

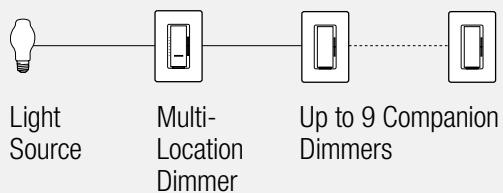

Fan control from up to 3 locations

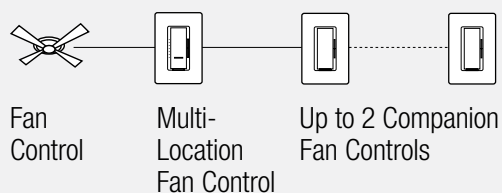

Fan/light control from up to 3 locations

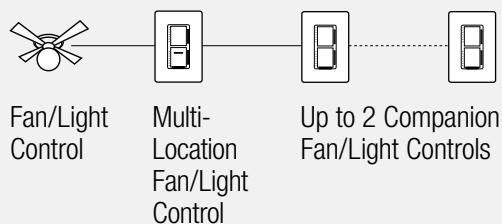

***For illustration purposes only.** Consult model number pages for specific voltage and capacity information.

Dimmer model numbers

Incandescent/halogen dimmers**

Remote control digital fade dimmers

Single-pole 120V 600W	MIR-600- CC ¹
Single-pole 120V 1000W	MIR-1000- CC ¹
Multi-location 120V 600W	MIR-600M- CC ¹
Multi-location 120V 1000W	MIR-1000M- CC ¹

Dimmers with IR remote controls

Single-pole 120V 600W	MIR-600T- CC ¹
Single-pole 120V 1000W	MIR-1000T- CC ¹
Multi-location 120V 600W	MIR-600MT- CC ¹
Multi-location 120V 1000W	MIR-1000MT- CC ¹

Wallplate sold separately.

Dimmer, IR remote control and wallplate

Single-pole 120V 600W	MIR-600THW- CC ³
--------------------------	------------------------------------

Multi-location dimmer, IR remote control, companion dimmer and wallplates

Multi-location 120V 600W	MIR-603THW- CC ³
-----------------------------	------------------------------------

Magnetic low-voltage dimmers**

Remote control digital fade dimmers

Single-pole 120V 600 VA (450W)	MIRLV-600- CC ¹
Single-pole 120V 1000 VA (800W)	MIRLV-1000- CC ¹
Multi-location 120V 600 VA (450W)	MIRLV-600M- CC ¹
Multi-location 120V 1000 VA (800W)	MIRLV-1000M- CC ¹

The stated VA (Volt-Ampere) rating includes the magnetic transformer heat losses and the lamp load. The stated W (Watt) rating is the maximum lamp wattage based on assumed 20% transformer loss.

Electronic low-voltage dimmers*

Remote control digital fade dimmers

Single-pole 120V 600W	MIRELV-600- CC ¹
Multi-location 120V 600W	MIRELV-600M- CC ¹

Only certain LED drivers are dimmable using an ELV dimmer, for more information, visit www.lutron.com/LED.

CC¹: Gloss and Satin color codes, see pg. 61

CC³: Gloss color codes, see pg. 61

(Wallplates not included with above, order separately, see pg. 160)

All models must be derated if ganged unless otherwise noted, see pg. 170.

*Requires neutral wire connection.

**Minimum load is 60 W/VA.

Fan and fan/light control model numbers

Fan controls

Digital fan control—quiet 7-speed

Multi-location/single-pole	MIR-FQ4FM- CC ¹
120V up to 4 canopy modules (1 A each)	

Multi-location/single-pole	MIR-FQ4FMT- CC ¹
fan package	
120V up to 4 canopy modules (1 A each)	

All above include one wall-mounted fan control and one fan-mounted canopy module. Wallplates sold separately.

MIR-FQ4FMT- model includes IR remote control.

No derating required if ganged.

Models may be used with up to two companion fan/light controls (MA-ALFQ35-).

Fan/light controls

Fan/light control—quiet 7-speed

Single-pole	MIR-LFQTHW- CC ¹
120V 300W light (top)	
1 canopy module for up to 1 A fan (bottom)	

Multi-location	MIR-LFQMT- CC ¹
120V 300W light (top)	
1 canopy module for up to 1 A fan (bottom)	

All above include one wall-mounted fan/light control, one fan-mounted canopy module and one IR remote control.

Wallplates sold separately.

No derating required if ganged.

MIR-LFQTHW- model includes wallplate.

Multi-location model may be used with up to two companion fan/light controls (MA-ALFQ35-).

Canopy module (fan mounted)

Canopy module	CM-FQ1
120V 1 A	

CC¹: Gloss and Satin color codes, see pg. 61

CC³: Gloss color codes, see pg. 61

CC⁴: Satin color codes, see pg. 61

(Wallplates not included with above, order separately, see pg. 160)

Companion dimmer, fan, fan/light and IR control model numbers

Companion controls

Companion dimmer

Companion dimmer	MA-R- CC ³
120V	

Companion dimmer	MSC-AD- CC ⁴
120V	

No derating required if ganged.

Companion fan control

Companion fan control	MA-AFQ4- CC ¹
120V	

Use up to a maximum of two wall-mounted companion fan controls (MIR-FQ4FMT- or MIR-FQ4FM-) for multi-location control.

No derating required if ganged.

Companion fan/light control

Companion fan/light control	MA-ALFQ35- CC ¹
-----------------------------	-----------------------------------

No derating required if ganged.

IR remote controls

IR remote control	MIR-ITFS-WH
(light only)	

IR remote control	MIR-ITFS-F-WH
(fan only)	

IR remote control	MIR-ITFS-LF-WH
(fan/light)	

Must be within 30 ft line-of-sight to IR receiver.

All models must be derated if ganged unless otherwise noted, see pg. 170.

Accessories

Wallplates



Shown actual size:
2-gang Claro® wallplate
in White (WH).

For more information
about Designer wallplates,
see pg. 160.

Coordinated electrical devices



Tamper resistant
GFCI receptacle




Customizable
6-port frame



Cable jack

For more information
about coordinated
Designer electrical
devices, see pg. 163.

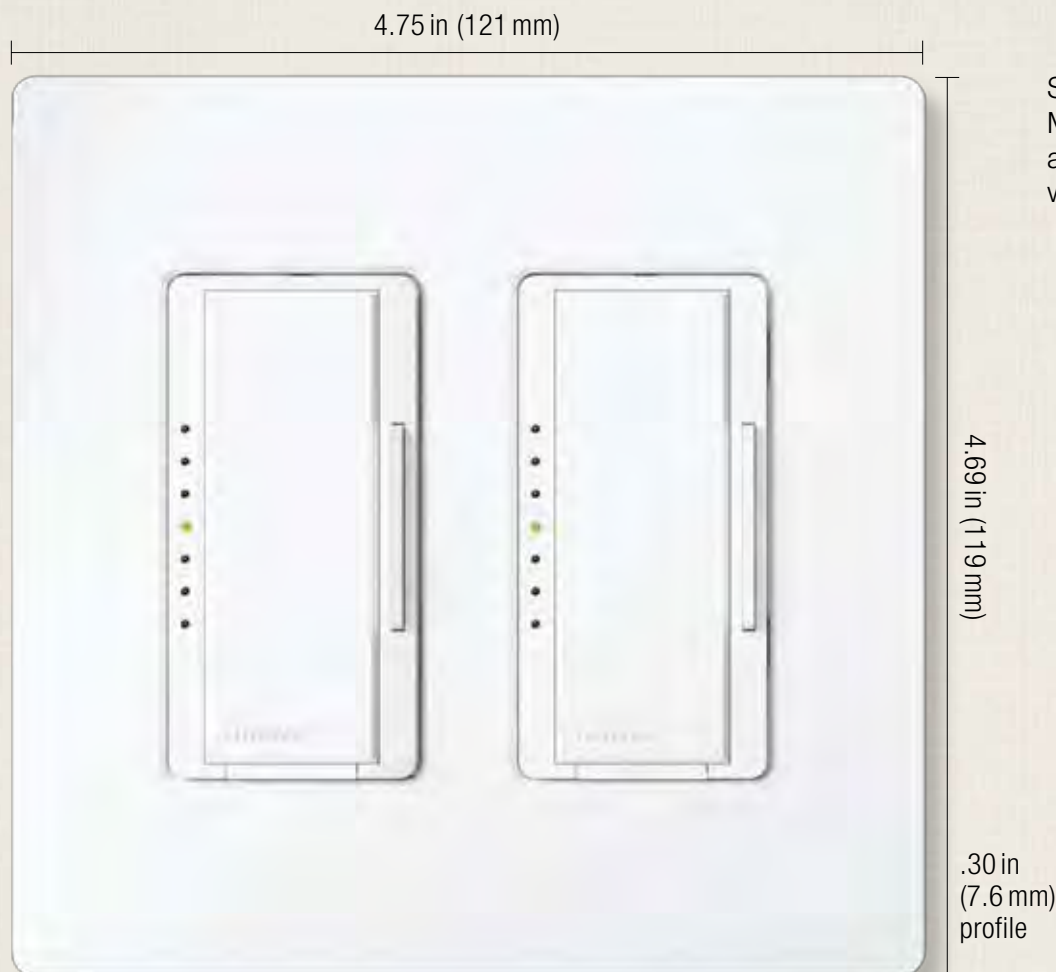

Shown actual size:
Maestro dimmers
and 2-gang Claro
wallplate in White (WH).

Product family features

- Can be used in conjunction with the following dimmer(s) and switch(es): Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark®, Skylark Contour™
- All Lutron® wallplates are screwless, seamless and have no visible hardware; the front plate securely snaps into the alignment adapter plate
- Full line of wiring devices in designer style opening
- Blank inserts available for Gloss colors (DV-BI-) and Satin colors (SC-BI-)
- Customize your designer wallplate with engraving, contact customer service to get started at 1.888.LUTRON1


Ganging and derating

- Designer wallplates use standard ganging
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging), see pg. 170
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pg. 172

Available finishes

Use **BOLD** color code in model number (Example: SC-1-**PL**)

Gloss finishes

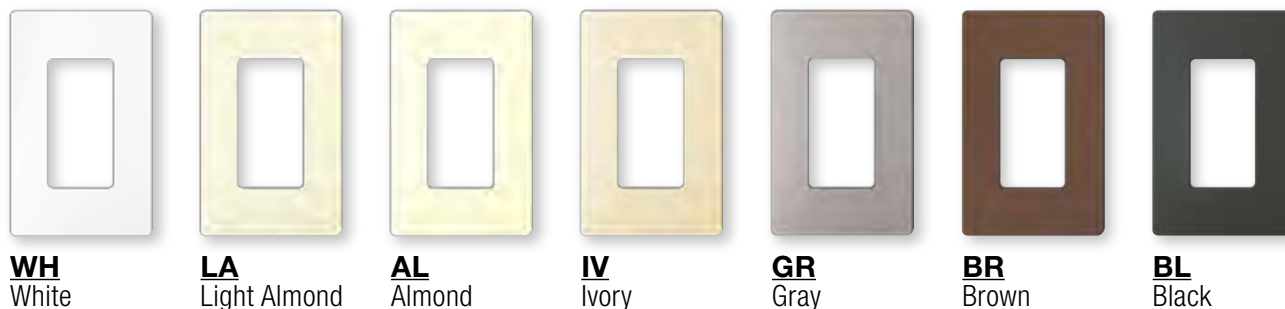

Satin finishes



*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Wallplates for Maestro®, Maestro IR®, Maestro Wireless®, Pico™ wireless control, Spacer System®, Diva®, Lyneo® Lx, Skylark® and Skylark Contour™



1-gang*

CW-1-**CC**²
SC-1-**CC**⁴


W: 2.94 in (75 mm); H: 4.69 in (119 mm)
D: .30 in (7.6 mm)



4-gang*

CW-4-**CC**²
SC-4-**CC**⁴

W: 8.37 in (213 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)



2-gang*

CW-2-**CC**²
SC-2-**CC**⁴

W: 4.75 in (121 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)



5-gang*

CW-5-**CC**²
SC-5-**CC**⁴

W: 10.18 in (259 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)



3-gang*

CW-3-**CC**²
SC-3-**CC**⁴

W: 6.56 in (167 mm); H: 4.69 in (119 mm);
D: .30 in (7.6 mm)

Multiple devices with line and low-voltage can be mounted behind a common wallplate using a standard barrier backbox, see Application Note #213 (Combining Low-Voltage and Line Voltage Wiring Devices in a Multi-Gang Box) at www.lutron.com/applicationnotes.

CC²: Gloss and Stainless Steel color codes, see pg. 161

CC⁴: Satin color codes, see pg. 161

Multi-gang dimmer installations may require derating, see pg. 170.

*Stainless Steel finish wallplates include black plastic trim/adaptor, visible from side. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Receptacles



6-gang*

CW-6-**CC**²

SC-6-**CC**⁴

W: 12.00in (305mm); H: 4.69in (119mm);
D: .30in (7.6mm)



Tamper resistant receptacles

15 A, 125V*	CARS-15-TR- CC ³
	SCRS-15-TR- CC ⁴
20 A, 125V*	SCRS-20-TR- CC ⁴

Cable jacks



- F-style, 75-Ohm coaxial cable

Single cable jack*

CA-CJH-**CC**³

SC-CJ-**CC**⁴

Receptacles

15 A, 125V*	CAR-15H- CC ³
	SCR-15- CC ⁴
20 A, 125V*	SCR-20- CC ⁴

GFCI Receptacles



- Press test button to confirm LED indicator status
- Press reset button to reset GFCI after circuit interruption

Telephone jacks



- 6-conductor telephone jack, RJ11

Single telephone jack*

CA-PJH-**CC**³

SC-PJ-**CC**⁴

Tamper resistant GFCI receptacles

15 A, 125V*	GFCI	CAR-15-GFTR- CC ³
		SCR-15-GFTR- CC ⁴
20 A, 125V*	GFCI	SCR-20-GFTR- CC ⁴

CC²: Gloss and Stainless Steel color codes, see pg. 161

CC³: Gloss color codes, see pg. 161

CC⁴: Satin color codes, see pg. 161

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use

Duplex for dimming use

15 A	120/125 V*	CAR-15-DFDU- CC ²
15 A	120/125 V*	SCR-15-DFDU- CC ⁴
20 A	120/125 V*	CAR-20-DFDU- CC ²
20 A	120/125 V*	SCR-20-DFDU- CC ⁴

Receptacles for dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs

Split duplex (half for dimming use)

15 A	120/125 V*	CAR-15-HFDU- CC ²
15 A	120/125 V*	SCR-15-HFDU- CC ⁴
20 A	120/125 V*	CAR-20-HFDU- CC ²
20 A	120/125 V*	SCR-20-HFDU- CC ⁴

CC²: Gloss color code and Stainless Steel, see pg. 161

CC⁴: Satin color codes, see pg. 161

Receptacles for dimming use



- Duplex for dimming both connected loads
- Projecting nubs prevent standard plugs from being used
- Requires replacement plugs for dimming use
- 15 A model shown
- Tamper resistant shutter mechanism

Dual dimming tamper resistant

15 A	120/125 V*	CAR-15-DDTR- CC ²
15 A	120/125 V*	SCR-15-DDTR- CC ⁴
20 A	120/125 V*	CAR-20-DDTR- CC ²
20 A	120/125 V*	SCR-20-DDTR- CC ⁴

Receptacles for dimming use



- Top half for dimming
- Projecting nub prevents standard plug from being used
- Requires replacement plugs for dimming use
- Bottom half is a general use receptacle and will fit standard duplex plugs
- 15 A model shown
- Tamper resistant shutter mechanism

Half dimming tamper resistant

15 A	120/125 V*	CAR-15-HDTR- CC ²
15 A	120/125 V*	SCR-15-HDTR- CC ⁴
20 A	120/125 V*	CAR-20-HDTR- CC ²
20 A	120/125 V*	SCR-20-HDTR- CC ⁴

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Replacement plug for dimming
(use with receptacles on left)



- This plug required for use with Lutron® receptacles for dimming use—plug will work in standard receptacle
- Easily replaces the existing plugs on lamps

120/125 V White	RP-FDU-10-WH
120/125 V Brown	RP-FDU-10-BR

UL/CSA/NOM regulatory approvals.

Important notes

- If the hot and dimmed hot feeds to the split duplex HFDU are supplied from different circuits or split-wired with separate switch-legs, a means to simultaneously disconnect these circuits must be provided at the panel board where they originate (NEC 210.7(C) 2002 Edition). A 2-pole circuit breaker or two single-pole circuit breakers with an approved handle tie can be used to accomplish this simultaneous disconnect. Feed-through dimming panels, which are those without breakers, are recommended when using the HFDU.
- Receptacles and plugs for dimming use are UL listed for use with all Lutron® wallbox dimmers included in this catalog.
- If there is only one electrical feed to the receptacle, then the duplex DFDU must be used.
- For detailed information, see Application Notes #91 (Guide to Dimming Table Lamps) and #109 (Guide to Dimming Portable Lamps via Receptacles) at www.lutron.com/applicationnotes.

CC²: Gloss color code and Stainless Steel, see pg. 161
CC⁴: Satin color codes, see pg. 161

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

Field customizable 6-port frame



- Shipped with six blanks in matching colors
- Connectors and wallplate sold separately
- Connectors snap in (no tools required)
- Connectors available in White (WH), unless noted

6-port frame*	CA-6PF- CC ³ SC-6PF- CC ⁴
---------------	--

Connectors for 6-port frame

Telephone/network jacks



8-conductor, RJ45 category 3	CON-1P-C3- EE ⁴
---------------------------------	-----------------------------------

8-conductor, RJ45 category 5e	CON-1P-C5E- EE ⁴
----------------------------------	------------------------------------

8-conductor, RJ45 category 6	CON-1P-C6- EE ⁴
---------------------------------	-----------------------------------

Fiber jacks



MT-RJ feed through	CON-1F-MTRJ-WH
--------------------	----------------



SC simplex	CON-1F-SC-WH
------------	--------------



LC non-flush mount	CON-1F-LC-WH
--------------------	--------------



ST style	CON-1F-ST-WH
----------	--------------

Cable jack



F-style, 75-Ohm coaxial cable	CON-1C- EE ⁴
----------------------------------	--------------------------------

BNC jack



BNC connector, 50-Ohm	CON-1B-WH
-----------------------	-----------

Connectors only for use with 6-port frame.

Switches



- Paddle turns on/off
- Use with any 15A load
- General purpose switching of all sources and motor loads
- No derating if ganged

General purpose switches (120/277 V)

Single-pole	15A*	CA-1PSH- CC ³ SC-1PS- CC ⁴
3-way	15A*	CA-3PSH- CC ³ SC-3PS- CC ⁴
4-way	15A*	CA-4PSH- CC ³ SC-4PS- CC ⁴

General purpose switch with locator light (120V only)

Single-pole	15A*	CA-1PSNL- EE ² SC-1PSNL- EE ¹⁰
3-way	15A*	CA-3PSNL- EE ² SC-3PSNL- EE ¹⁰
4-way	15A*	CA-4PSNL- EE ² SC-4PSNL- EE ¹⁰

CC³: Gloss color codes, see pg. 161

CC⁴: Satin color codes, see pg. 161

EE²: Only available in Almond (AL), Ivory (IV), Light Almond (LA) and White (WH)

EE⁴: Only available in White (WH) and Black (BL)

EE¹⁰: Available in Biscuit (BI), Eggshell (ES), Goldstone (GS), Limestone (LS), Sea Glass (SG) and Snow (SW)

*Stainless Steel finish only available as separate wallplate. Match with separate Black (BL) or Midnight (MN) controls and accessories.

How to understand ganging and derating

Standard ganging

Ganging is the side-by-side mounting of two or more dimmers or accessory devices under a multi-gang wallplate.

Standard multi-gang installation:

- Uses standard multi-gang electrical backboxes
- Uses standard multi-gang wallplates
- Requires fins to be removed from dimmers for proper spacing (“Fins Broken” ganging)
- May require derating (i.e., reduction of dimmer capacity due to fin removal), see Derating Tables, pgs. 172–173


Custom ganging for Architectural style controls

For Architectural style dimmers and switches, it is possible to retain the maximum capacity of dimmers in multi-gang applications via custom architectural multi-gang:

- May require customized, wider-than-standard wallplates
- May require wider-than-standard electrical backboxes
- Allows full capacity (“No Fins Broken”) ganging
- Required for Nova® dimmers and for larger width (high capacity) architectural controls
- Visit www.lutron.com/customganging for additional information


Standard ganging for dimmers, switches and accessories

New Architectural




pg. 148

Architectural




pg. 152

Designer




pg. 160


Traditional




pg. 166




Vierti®



Vareo®
Nova T☆®



Maestro®
Maestro IR®
Maestro Wireless®
Spacer System®
Diva®
Lyneo® Lx
Skylark®
Skylark Contour™



Abella®
Ceana®
Ariadni®
Glyder®
Rotary


Derating Table 1
pg. 172

Derating Table 2
pg. 173


Derating Table 1
pg. 172

Derating Table 1
pg. 172

Standard ganging and fins broken derating examples:

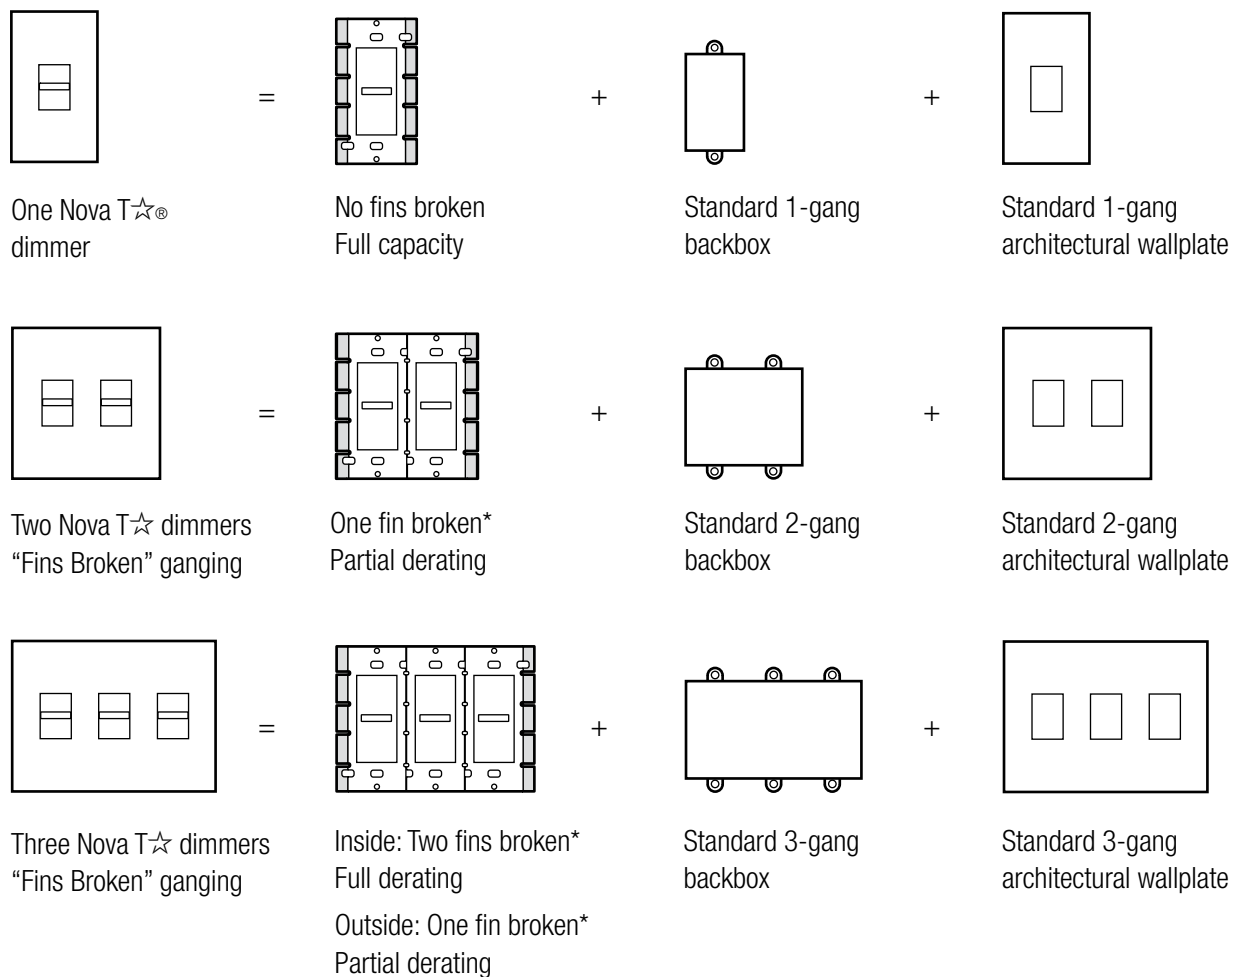

Custom Architectural ganging example:

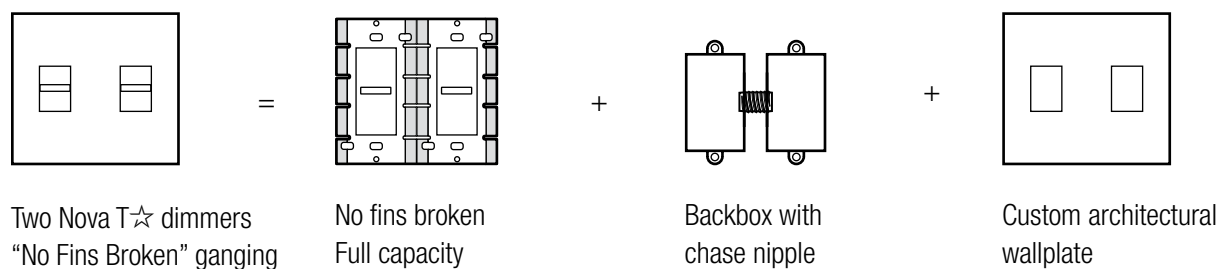

For further information on ganging and derating, visit www.lutron.com/multigang.

*The fins are scored and designed to be removed easily.

Derating Table 1**New Architectural** | Verti®**Designer** | Maestro®, Maestro IR®, Maestro Wireless®, Spacer System®, Diva®, Lyneo® Lx, Skylark Contour™, Skylark®**Traditional** | Abella®, Ceana®, Ariadni®, Glyder®, Rotary**No fins broken****1 fin broken****2 fins broken**

Incandescent			
Dimmers	600W	500W	400W
	1000W	800W	650W
Dual dimmers	300W	250W	200W
	300W	250W	200W
Magnetic low-voltage			
Dimmers	600VA/450W	500VA/400W	400VA/300W
	1000VA/800W	800VA/650W	650VA/500W
Electronic low-voltage			
Dimmers	300W	250W	200W
	500W	450W	400W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Verti	60 ballasts/6 A	50 ballasts/5 A	35 ballasts/3.5 A
Maestro/Spacer System	20 ballasts/6 A	20 ballasts/5 A	20 ballasts/3.5 A
Diva, Skylark, Lyneo Lx and Ariadni	no derating	no derating	no derating
Tu-Wire®: Spacer System, Diva, Skylark	5 A	4 A	3.3 A
Fan controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5 A	1.5 A	1.5 A
Fully variable	5 A	4 A	3 A
Fan/light controls			
Quiet 7-speed	1.0A/300W	1.0A/300W	1.0A/300W
Quiet 3-speed	1.5 A/300W	1.5 A/300W	1.5 A/300W
	1.5 A/360W	1.5 A/360W	1.5 A/360W
Fully variable	2.5 A/300W	2.1 A/250W	1.7 A/200W
Electronic switches			
Verti	6A/3A	5A/3A	3.5A/3A
Maestro (light/fan)	8A/3A	6.5A/3A	5A/3A
Abella (light/fan)	6A/3A	5A/3A	3.5A/3A

Derating Table 2

Architectural | Vareo®, Nova T☆®


	 No fins broken	 1 fin broken	 2 fins broken
Incandescent			
Dimmers	600W	500W	300W
	1000W	900W	700W
	1500W	1250W	1000W
	1950W	—	—
Magnetic low-voltage			
Dimmers	600 VA/450 W	500 VA/400 W	300 VA/250 W
	1000 VA/800 W	900 VA/750 W	700 VA/500 W
	1500 VA/1200 W	1250 VA/1000 W	1000 VA/800 W
Electronic low-voltage			
Dimmers	300W	300W	250W
	600W	500W	400W
Fluorescent			
Hi-lume®/Hi-lume® Compact SE/Eco-10®/EcoSystem®			
Vareo	20 ballasts / 8 A	20 ballasts / 6 A	20 ballasts / 4.5 A
Nova T☆	6 A	no derating	no derating
	8 A	no derating	no derating
	16 A	no derating	no derating
0-10 VDC control ¹	30 mA ballasts	no derating	no derating
Tu-Wire®	5 A	4 A	3.3 A
Fan controls			
Quiet 3-speed	1.5 A	no derating	no derating
Fully variable	6 A	4.2 A	2.5 A
Fully variable	12 A	10 A	8.3 A
Electronic tapswitches²			
VETS-1000-	1000W	800W	650W
VETS-1000-SL-	1000W	900W	700W
VETN-1000-	1000 VA	700 VA	550 VA

For further information on ganging Nova®, visit www.lutron.com/customganging.

¹PowerPack required for line voltage switching.


²VETS-R-Auxiliary electronic tapswitches do not require derating.

Maestro IR®

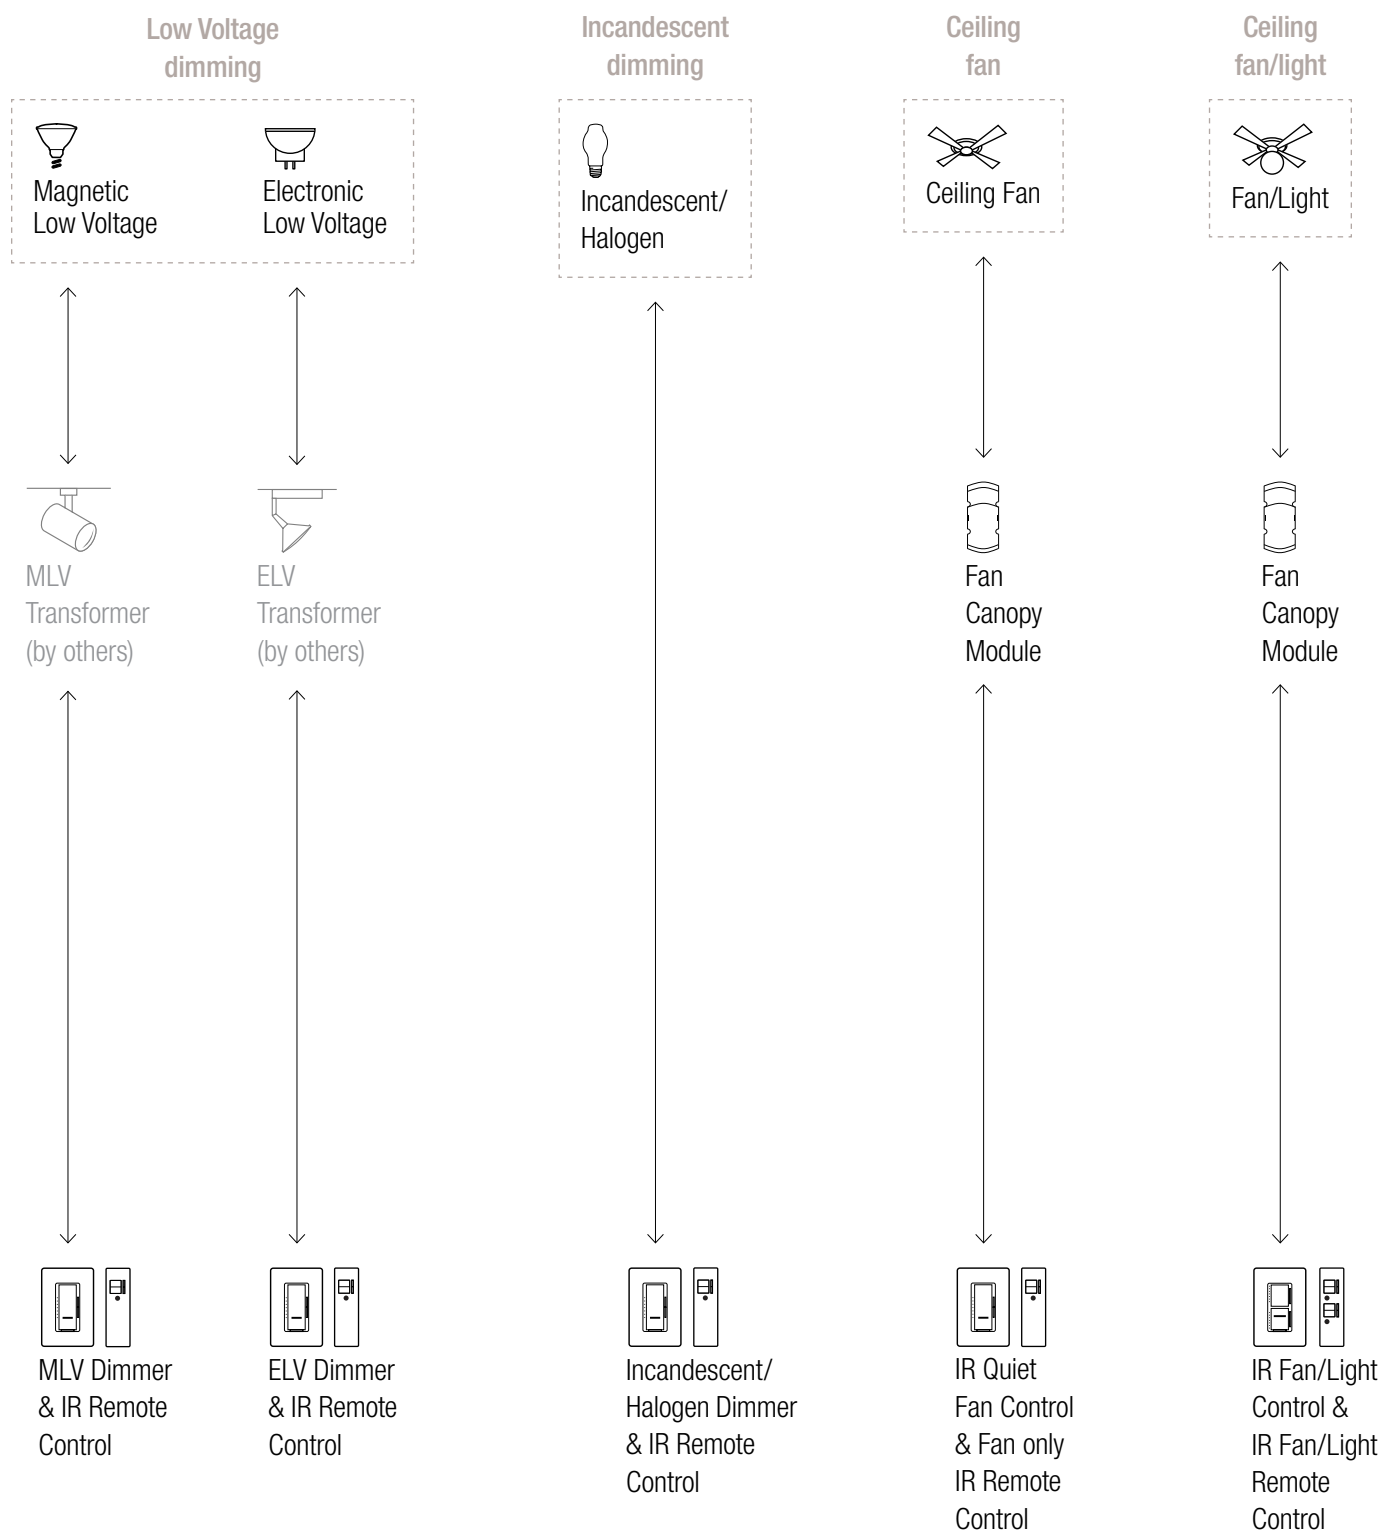

For illustration purposes only. Consult model number pages for specific voltage and capacity information.

Abella®

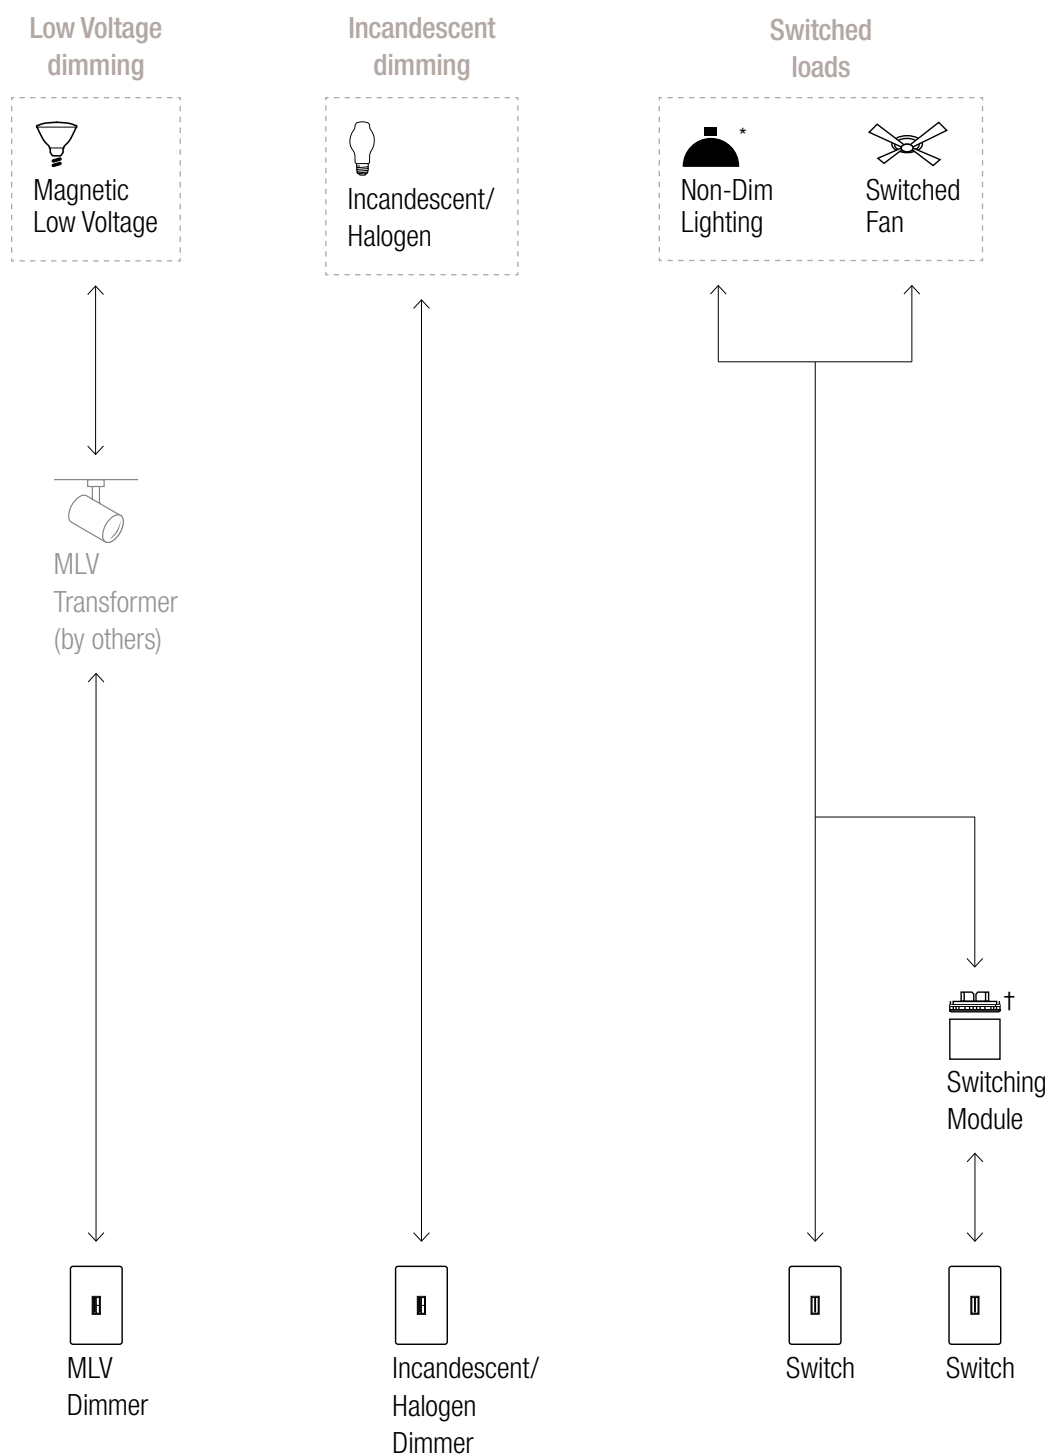

For illustration purposes only. Consult model number pages for specific voltage and capacity information.

*Refer to pg. 118 for specific load type.

†Interface provides additional capacity and/or may be different voltage than dimmer.