12 VOLT CORDLESS IMPACT DRIVERS

9057-6 (KIT)

INCLUDES 1/4" HEX ADAPTER, TWO BATTERY PACKS, CHARGER AND IMPACT RESISTANT CARRYING CASE



1/4" HEX ADAPTER





ACCESSORY HEX IMPACT SOCKETS WITH 3/8" SQUARE DRIVE

49-66-3201	5/16"	**49-66-3250**	10 MM
49-66-3205	3/8"	**49-66-3255**	12 MM
49-66-3210	7/16"	**49-66-3260**	13 MM
49-66-3215	1/2"	**49-66-3265**	14 MM
49-66-3220	9/16"	**49-66-3270**	15 MM
49-66-3225	5-PC inch set	**49-66-3275**	5-PC MM set

SPECIFICATIONS

CATALOG NUMBER	VOLTS DC	DRIVE SIZE	NO LOAD RPM	NO LOAD BPM	BATTERY CAPACITY AMP HRS	TORQUE (IN.-LBS.)	LENGTH (IN.)	NET WGT. LBS.	SHIP. WGT. LBS.
9057-6 KIT	12	3/8" & 1/4"	0-1500	0-2200	1.4	600	9.5	4	10.7

STANDARD EQUIPMENT: FOR 9057-6 – 1/4" Hex Adapter 48-03-3630, Two 12 Volt Batteries 48-11-0140, Smart Start Charger 48-59-0170, Carrying Case 48-55-9055.

3/8" SQUARE DRIVE
VARIABLE SPEED, REVERSING

Ideal For High Torque Applications

- **Compact Balanced Design**
  For excellent balance and a compact tool profile.
- **Maximum 720 In.-Lbs. Tightening Torque**
  3 seconds of impacting tightens fastener to 600 in.-lbs. torque; 10 seconds tightens to 720 in.-lbs. torque.
- **Rugged, Impact Resistant Housing**
  Glass reinforced nylon handles withstand rough handling and extended use.
- **Variable Speed Switch With Electric Brake**
  Instantly stops tool with release of trigger switch. Increased control for all driving applications.
- **3/8" Square Drive**
  3/8" square drive for impact rated sockets and quick release adapter that accepts 1/4" hex power screwdriver bits.
- **Smart Start™ Charger**
  Charger monitors battery temperature; when cool begins recharge cycle, then switches to maintenance charge mode to keep battery fully charged.
- **Two 1.4 Amp-Hr 12 Volt Battery Packs**

CORDLESS 2.4 VOLT CAULK & ADHESIVE GUN

FOR AUTO GLASS INSTALLERS, ROOFERS, BUILDING CONTRACTORS, CABINET MAKERS, CARPET LAYERS AND OTHER CAULKING APPLICATIONS



6550-20

INCLUDES CAULKING GUN, BATTERY PACK AND CHARGER





- **Variable Speed Dial Controls Caulk Flow**
- **Rapid Plunger Release**
  Removes the pressure on the plunger to reduce the possibility of over applying sealants and adhesives.
- **Caulking Tube Volume Gauge**
- **Designed For Standard 11 Oz. Caulking Tubes**
- **Expel Up To 10 Tubes Of Caulk With One Fully Charged Battery**
  (At room temperature.)
- **Overload Clutch**
- **Trigger Control With Lock-Off Switch**
- **Hand Strap Prevents Tool From Being Dropped**
- **Uses Same Battery As 2.4 Volt Screwdrivers On Page 24**

SPECIFICATIONS

CATALOG NUMBER	VOLTS DC	SPEED SEC./CARTRIDGE	LENGTH	NET WGT. (LBS.)	SHIP. WGT. (LBS.)
6550-20	2.4	46-120	17"	4.0	5.8

STANDARD EQUIPMENT: Caulking Gun, 2.4 Volt Battery Pack 48-11-0100 and 2.4 Volt Battery Charger 48-59-0180.

ACCESSORIES

NI-CAD BATTERY PACK
48-11-0100 2.4 Volt – Standard equipment with 6550-20.



1 HOUR CHARGER
48-59-0180
Charges 2.4 volt battery packs in one hour.



ONE HOUR VEHICLE BATTERY CHARGER
48-59-0181
Plugs into the vehicle cigarette lighter to charge 2.4 volt batteries in one hour.

CORDLESS 2.4 VOLT SCREWDRIVERS

SINGLE SPEED AND 2-SPEED REVERSING MODELS AVAILABLE. 6 POSITION ADJUSTABLE CLUTCH, FORWARD/ REVERSE BUTTON WITH SWITCH LOCK FEATURE.

SINGLE SPEED MODELS 190 RPM

6538-1
SINGLE SPEED TOOL ONLY



6539-6
INCLUDES 6538-1 SCREWDRIVER, BATTERY PACK AND CHARGER

6540-1 (KIT)
INCLUDES 6538-1 SCREWDRIVER, BATTERY PACK, CHARGER, CHUCK ATTACHMENT, 8-BIT SET AND IMPACT RESISTANT CARRYING CASE



Adjustable two position handle.

TWO-SPEED MODELS: HIGH 400 RPM / LOW 200 RPM

6545-6
TWO SPEED TOOL ONLY



6546-6
INCLUDES 6545-6 SCREWDRIVER, BATTERY PACK AND CHARGER

6547-1 (KIT)
INCLUDES 6545-6 SCREWDRIVER, BATTERY PACK, CHARGER, CHUCK ATTACHMENT, 8-BIT SET AND IMPACT RESISTANT CARRYING CASE



6547-22 (KIT)
NEW!

VALUE AND PERFORMANCE!

INCLUDES 6545-6 SCREWDRIVER, TWO BATTERY PACKS, CHARGER, CHUCK ATTACHMENT, 4-PIECE BIT SET AND IMPACT RESISTANT CARRYING CASE



ACCESSORIES



2.4 VOLT NI-CAD BATTERY

48-11-0100 Standard equipment for 6539-6, 6540-1, 6546-6 and 6547-1. Optional for 6538-1 and 6545-6.



120 VOLT AC ONE-HOUR BATTERY CHARGER

48-59-0180 Standard equipment for 6539-6, 6540-1, 6546-6 and 6547-1. Optional for 6538-1 and 6545-6.

ONE-HOUR VEHICLE BATTERY CHARGER

48-59-0181 Plugs into the vehicle cigarette lighter to charge 2.4 volt batteries in one hour.

IMPACT RESISTANT CARRYING CASE ONLY

48-55-0798 Standard equipment for 6540-1 and 6547-1.

8 PIECE 1/4" HEX DRIVE BIT SET

48-30-0101 Standard equipment for 6540-1 and 6547-1.



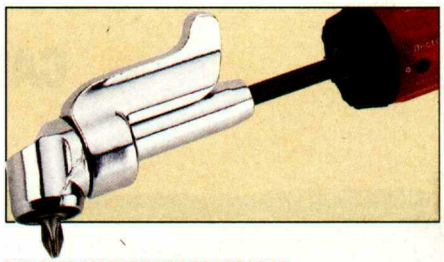

OFF-SET™ SCREWDRIVER POWER HEAD

48-32-2100 Use the power and speed of your 2.4 volt cordless screwdriver to fasten or remove screws, tight applications. Durable die cast construction. 1/4" magnetic bit reception for standard bits. 360° adjustable thumb flange. Maximum 100 in./lbs. torque 400 rpm.

48-32-2115 Cut Pack display case of 12, 48-32-2100.

SPECIFICATIONS

CATALOG NUMBER	VOLTS DC	SPEED RPM	DIAMETER	MAXIMUM TORQUE (IN.-LBS.) POSITION 1-2	POSITION 3-4	POSITION 4-5	POSITION 6	LENGTH (IN.)	NET WGT. (LBS.)	SHIP. WGT. (LBS.)
• 6538-1*	2.4	190	1.4"	5 IN.-LBS.	12 IN.-LBS.	16 IN.-LBS.	22 IN.-LBS.	9	7/8	1 .00
6539-6	2.4	190	1.4"	5 IN.-LBS.	12 IN.-LBS.	16 IN.-LBS.	22 IN.-LBS.	9	7/8	2.75
6540-1	2.4	190	1.4"	5 IN.-LBS.	12 IN.-LBS.	16 IN.-LBS.	22 IN.-LBS.	9	7/8	4.9
• 6545-6*	2.4	400/200	1.4"	3.5 IN.-LBS.	10.5 IN.-LBS.	17.5 IN.-LBS.	26 IN.-LBS.	9-3/8	7/8	2.75
6546-6	2.4	400/200	1.4"	3.5 IN.-LBS.	10.5 IN.-LBS.	17.5 IN.-LBS.	26 IN.-LBS.	9-3/8	7/8	2.75
6547-1	2.4	400/200	1.4"	3.5 IN.-LBS.	10.5 IN.-LBS.	17.5 IN.-LBS.	26 IN.-LBS.	9-3/8	7/8	4.9
6547-22	2.4	400/200	1.4"	3.5 IN.-LBS.	10.5 IN.-LBS.	17.5 IN.-LBS.	26 IN.-LBS.	9-3/8	7/8	5.2

STANDARD EQUIPMENT: FOR 6538-1 – Single Speed Screwdriver. **FOR 6539-6** – 6538-1 Screwdriver, 2.4 Volt Battery Pack, 120 Volt AC One-Hour Battery Charger with 2 Phillips and One Slotted Bit. **FOR 6540-1** – Same as 6539-6 Plus 1/4" Chuck Attachment with Key 49-22-1560, 8-Piece Driver/Drill Bit Set and Impact Resistant Carrying Case. **FOR 6545-6** – Two Speed Screwdriver. **FOR 6546-6** – Two Speed Screwdriver, 2.4 Volt Battery Pack, 120 Volt AC One-Hour Battery Charger with 2 Phillips and One Slotted Bit. **FOR 6547-1** – Same as 6546-6 Plus 1/4" Chuck Attachment with Key 49-22-1560, 8-Piece Driver/Drill Bit Set and Impact Resistant Carrying Case. **FOR 6547-22** – Two Speed Screwdriver, Two 2.4 Volt Battery Packs, 120 Volt AC One-Hour Battery Charger, 1/4" Chuck Attachment with Key 49-22-1560, 4-Piece Driver/Drill Bit Set (1/4" Socket Driver with 1/4" Hex, 1/8", 3/16" and 1/4" Twist Bits) and Impact Resistant Carrying Case.

• Unit Sold Less Battery Pack. Specifications Shown With Battery.

12, 9.6, 7.2 AND 2.4 VOLT CORDLESS TOOL ACCESSORIES



12 VOLT CORDLESS TOOLS		TOOL MODELS
1.4 A-H NI-CAD BATTERY	48-11-0140	0407-6 • 0407-22 • 0415-20 • 0415-21 0415-23 • 0422-6 • 0431-6 • 0436-6 0446-6 • 0478-6 • 9057-6 • 9058-6
1.7 A-H SUPER-TOUGH NI-CAD BATTERY	48-11-0200	
2.0 A-H SUPER-TOUGH NI-CAD BATTERY	48-11-0250	
2.5 A-H FAT PACK NI-CAD BATTERY	48-11-0300	
SUPER CHARGER II	48-59-0192	
AUTO CHARGER	48-59-0172	
IMPACT RESISTANT CARRYING CASE	48-55-0240	0407-6 • 0407-22 • 0415-20 • 0415-21
	48-55-1910	0478-6
	48-55-9055	9057-6 • 9058-6
STEEL CARRYING CASE	48-55-9060	0422-6
	48-55-9090	0431-6 • 0436-6 • 0446-6
	48-55-1575	0407-6 • 0415-20 • 0415-21
KEYLESS CHUCK	48-66-0400	0422-6
	48-66-0410	0431-6
	48-66-0390	0436-6 • 0446-6
	48-66-0375	0407-6 • 0407-22 • 0415-20 • 0415-21 0478-6
TOOL HOLSTER	49-17-0245	0400-1 • 0407-6 • 0408-6 • 0409-6 • 0415-20 0415-21 • 0415-23
BATTERY HOLSTER	49-17-0244	0401-6 • 0407-6 • 0415-20 • 0415-21• 0415-23 0422-6 • 0430-1 • 0431-6 • 0436-6 • 0446-6 0478-6 9057-6 • 9058-6

9.6 VOLT CORDLESS TOOLS		TOOL MODEL
NI-CAD BATTERY	48-11-0080	All MILWAUKEE 9.6 volt drills
SUPER CHARGER II	48-59-0192	
LIGHTER PLUG TYPE CHARGER	48-59-0172	
IMPACT RESISTANT CARRYING CASE	48-55-0220	
STEEL CARRYING CASE	48-55-1575	
KEYLESS CHUCK	48-66-0375 48-66-0385	
TOOL HOLSTER	49-17-0245	
BATTERY HOLSTER	49-17-0243	

7.2 VOLT CORDLESS TOOLS		TOOL MODELS
NI-CAD BATTERY	48-11-0130	All MILWAUKEE 7.2 volt drills
HIGH IMPACT CARRYING CASE	48-55-0520	
KEYLESS CHUCK	48-66-0375 48-66-0385	
TOOL HOLSTER	49-17-0242	

2.4 VOLT CORDLESS TOOLS		TOOL MODELS
NI-CAD BATTERY	48-11-0100	6550-20 • 6538-1 • 6539-6 6540-1 • 6545-6 •6546-6 6547-1 • 6547-22
1-HOUR CHARGER	48-59-0180	
1-HOUR VEHICLE CHARGER	48-59-0181	
HIGH IMPACT CARRYING CASE	48-55-0798	6538-1 • 6539-6 • 6540-1 6545-6 •6546-6 • 6547-1 6547-22
CHUCK & KEY	49-22-1560	
KEY ONLY	48-66-3350	
TOOL HOLSTER	49-17-0251	



ADDITIONAL CORDLESS ACCESSORIES

FAT PACK

48-11-0300

12 volts, 2.5 amp-hr delivers maximum run time. Get 18 volt performance from your Milwaukee 12 volt tool. Compatible with all 12 volt Milwaukee cordless tools, except Power-Plus™ models.

WORK LIGHT

49-24-0100

120° pivoting head. High output krypton bulb. Spare bulb stores under lens cap. Trigger style on-off switch with intermittent position. Accepts all Milwaukee 12 or 9.6 volt batteries except Power-Plus™ batteries.

VOLTS DC ONLY	HEIGHT HEAD UP	HEAD DOWN	NET WGT. LBS.	SHIP. WGT. LBS.
12 or 9.6	11.6"	9.6"	.75	1.2

UTILITY BELT

49-17-0256

2" wide, adjustable length to max. 54" long. For use with all tool holsters.