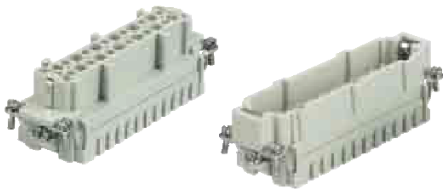






Number of contacts

24 +



Inserts

		Part number																						
Identification	Series	Male insert (M)	Female insert (F)	Drawing	Dimensions in mm																			
Crimp terminal Order crimp contacts separately (see Technical characteristics on page 03.03) 	Han E®	09 33 024 2602	09 33 024 2702	 1) Distance for contact max. 21 mm <table><tr><td></td><td>a</td><td>b</td><td>c</td><td>d</td></tr><tr><td>Han E® screw</td><td>18</td><td>33</td><td>18</td><td>35</td></tr><tr><td>Han® ES / Han E® crimp</td><td>19</td><td>34</td><td>19</td><td>36</td></tr><tr><td>Han® ESS</td><td>34</td><td>49</td><td>32</td><td>49</td></tr></table> Contact arrangement view from termination side  Panel cut out 		a	b	c	d	Han E® screw	18	33	18	35	Han® ES / Han E® crimp	19	34	19	36	Han® ESS	34	49	32	49
					a	b	c	d																
Han E® screw	18	33	18	35																				
Han® ES / Han E® crimp	19	34	19	36																				
Han® ESS	34	49	32	49																				
Screw terminal with wire protection 	Han E®	09 33 024 2601	09 33 024 2701																					
Cage-clamp terminal 					Han® ES	09 33 024 2616	09 33 024 2716																	
Cage-clamp terminal two terminals per contact 	Han® ESS	09 33 024 2672	09 33 024 2772																					