


Caddy Basket Brackets

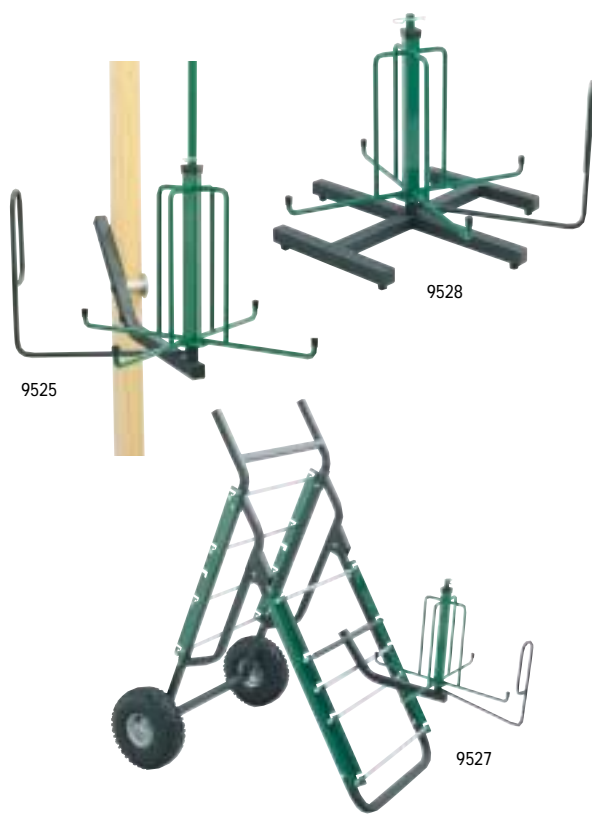

STUD MOUNT CADDY (9525)

- Fits both 2x4 and 2x6 studs.
- Dispense coils of armored cable or NM-B.
- Swivel eyelet eliminates tangles.
- Add an additional basket to double capacity.

MOBILE MOUNT BRACKET (9527)

- Optional caddy for 9510 Deluxe A-frame Mobile Caddy.
- Dispense one coil of armored cable or NM-B.
- Swivel eyelet eliminates tangles.

FLOOR MOUNT BRACKET (9528)

- Dispense coils of armored cable or NM-B.
- Swivel eyelet eliminates tangles.
- Wide base for stable performance.

Cat. No.	UPC No.	Description
9525	01263	Stud Bracket and Basket
Consists of:		
9536	01239	Stud Mount Bracket
9529	01232	Caddy Basket
Cat. No.	UPC No.	Description
9527	01264	Caddy Bracket and Basket
Consists of:		
9532	01253	Mobile Mount Bracket
9529	01232	Caddy Basket
Cat. No.	UPC No.	Description
9528	01265	Floor Mount Caddy and Basket
Consists of:		
9533	01259	Floor Mount Bracket
9529	01232	Caddy Basket

SPECIFICATIONS

9525 Maximum Capacity: 100 lbs. (45.4 kg) Weight: 10.5 lbs. (4.77 kg) Size: 29-1/2" (749 mm) high x 20-3/4" (527 mm) wide	9527 Maximum Capacity: 50 lbs. (22.7 kg) Weight: 10.5 lbs. (4.77 kg) Size: 00 (00 mm) high x 00" (00 mm) wide	9528 Maximum Capacity: 50 lbs. (22.7 kg) Weight: 10.5 lbs. (4.77 kg) Size: 15.5 (394 mm) high x 19" (483 mm) wide
9536 Weight: 5 lb. (2.3 kg) Size: 29-1/2" (749 mm) high	9532 Weight: 5 lb. (2.3 kg) Size: 5-1/2" (394 mm) high x 17-3/4" (451 mm) wide	9533 Weight: 5 lbs. (2.3 kg) Size: 15-1/2" (394 mm) high x 19" (483 mm) wide
9529 Weight: 5.5 lbs. (2.5 kg) Size: 12-3/4" (324 mm) high x 20-3/4" (527 mm) wide	9529 Weight: 5.5 lbs. (2.5 kg) Size: 12-3/4" (324 mm) high x 20-3/4" (527 mm) wide	9529 Weight: 5.5 lbs. (2.5 kg) Size: 12-3/4" (324 mm) high x 20-3/4" (527 mm) wide

Screw Type Reel Stands



- Wide welded steel base for added stability.
- Roller bearings fit in the spindle groove to keep the spindle in place and turning freely.
- Two stands and a spindle are required for a complete set-up.

Cat. No.	UPC No.	Description
683	15372	Reel Stand 22" - 54" (558.8 - 1372 mm)
687	17076	Reel Stand 13" - 28" (330.2 - 711.2 mm)
684	15375	Spindle for 683 Reel Stand
647	15321	Spindle for 687 Reel Stand
25591	25591	Stop Pin (683 - 2; 687 - 1)
38619	38619	Jackscrew Replacement Unit for 683 or 687

SPECIFICATIONS

Size:	683 - 24" x 23" (609.6 x 584.2 mm) base; 54" (1372 mm) maximum height 687 - 14-1/2" x 20" (368.3 x 508 mm) base; 28" (711.2 mm) maximum height
Capacity:	683 - 2,500 lbs. (1134 kg) each, 46" - 96" (1168 x 2438 mm) reel diameter 687 - 2,500 lbs. (1134 kg) each, 28" - 56" (711.2 x 1422 mm) reel diameter
Weight:	683 - 49 lbs. (22.2 kg), 687 - 25 lbs. (11.3 kg)

NOTE: Rope is a very critical link in the cable pulling system. See pages 98 & 99 for proper pulling rope selection.

Ratchet-Type Reel Stand



- Ratchet mechanism to easily raise or lower the height.
- Roller bearings fit in the spindle groove to keep the spindle in place and turning freely.
- Two stands and a spindle are required for a complete set-up.

Cat. No.	UPC No.	Description
656	21979	Ratchet Reel Stand 28" - 46-5/8" (711 mm - 1184 mm)
657	21980	Spindle for 656 Reel Stand
38697	38697	Jackscrew Replacement Unit

SPECIFICATIONS

Size: 24-1/2" x 23" (622 mm x 584 mm) base; 46-5/8" maximum height
Capacity: 3,750 lbs. (1701 kg) 58" - 90" (1473 mm - 2286 mm) reel diameter
Weight: 94 lbs. (42.64 kg)

Reel Stand Spindles



- Tempered steel with grooves to fit reel stand rollers.

Cat. No.	UPC No.	Description
647	15321	Spindle for 687 Reel Stands
657	21980	Spindle for 656 Reel Stands
684	15375	Spindle for 683 Reel Stands


SPECIFICATIONS

Size: 647 - 2-3/8" diameter x 62" (60.3 x 1575 mm)
657 - 3-1/2" diameter x 100" (89 x 2540 mm)
684 - 2-3/8" diameter x 76" (60.3 x 1930 mm)
Capacity: 647 - 5,000 lbs. (2268 kg) 59" (1500 mm) between grooves
657 - 7,500 lbs. (3402 kg) 100" (2540 mm) between grooves
684 - 5,000 lbs. (2268 kg) 73" (1854 mm) between grooves
Weight: 647 - 42 lbs. (19.06 kg)
657 - 124 lbs. (56.25 kg)
684 - 50 lbs. (22.68 kg)

Reel Rollers



39660

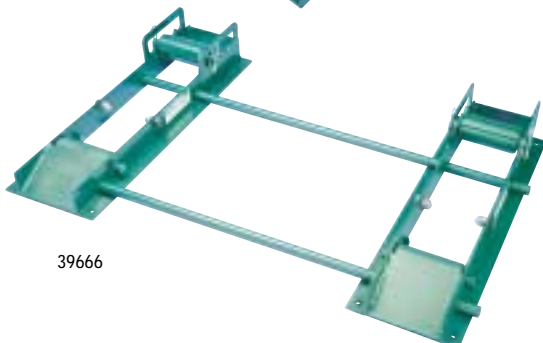

39666

- Heavy-duty welded steel construction.
- Built-in loading ramps.
- Adjustable to various reel widths and diameters.
- Roller locks for unloading.
- Side ball rollers for centering.
- Fast, convenient ground level set-up for paying out large cable reels.

Cat./UPC No.	Description
39660	Reel Roller, single platform roller, 32" (813 mm) L x 34" (864 mm) W
39666	Reel Roller, kit of two rollers and two spreaders, 32" (813 mm) L x 11" (279 mm) W per frame

SPECIFICATIONS

Size: 39660 - 32" (813 mm) L x 34" (864 mm) W
39666 - 32" (813 mm) L x 11" (279 mm) W
Capacity: 39660 - 2,500 lbs. (1134 kg) 30" (762 mm) wide
39666 - 2,000 lbs. (907.2 kg) 42" (1067 mm) wide