



CompactLogix Controllers Specifications

Bulletins 1769 and 1768

Topic	Page
Summary of Changes	2
Catalog Numbers	2
CompactLogix 5370 Controllers	3
Armor CompactLogix and Armor Compact GuardLogix Controllers	25
1769 Packaged CompactLogix Controllers with Embedded I/O	29
1769 Modular CompactLogix Controllers	35
1768 CompactLogix Controllers	38
Controller Memory Use	41
Controller Compatibility	41
Controller Connections	43
CompactLogix Controller Accessories	45
Additional Resources	47



Summary of Changes

This publication contains the following new or updated information. This list includes substantive updates only and is not intended to reflect all changes.

Topic	Pages
Removed EAC certification for CompactLogix™ 5370 and Compact GuardLogix® 5370 Controllers, and Armor™ CompactLogix and Armor Compact GuardLogix Controllers	5, 26


Catalog Numbers

This publication is applicable to the following catalog numbers.


CompactLogix 5370 and Compact GuardLogix 5370 Controllers	1769-L16ER-BB1B, 1769-L18ER-BB1B, 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK, 1769-L19ER-BB1B, 1769-L19ER-BB1BK, 1769-L24ER-QB1B, 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK, 1769-L27ERM-QBFC1B, 1769-L30ER, 1769-L30ER-NSE, 1769-L30ERK, 1769-L30ERM, 1769-L30ERMK, 1769-L30ERMS, 1769-L33ER, 1769-L33ERK, 1769-L33ERM, 1769-L33ERMK, 1769-L33ERMS, 1769-L33ERMSK, 1769-L36ERM, 1769-L36ERMS, 1769-L37ERM, 1769-L37ERMK, 1769-L37ERMS, 1769-L37ERMSK, 1769-L38ERM, 1769-L38ERMK, 1769-L38ERMS, 1769-L38ERMSK
Armor CompactLogix and Armor Compact GuardLogix Controllers	1769-L33ERMO, 1769-L33ERMOS, 1769-L36ERMO, 1769-L36ERMOS, 1769-L37ERMO, 1769-L37ERMOS, 1769-L38ERMO, 1769-L38ERMOS
1769 Packaged Controllers	1769-L23-QBFC1B, 1769-L23E-QB1B, 1769-L23E-QBFC1B
1769 Modular Controllers	1769-L31, 1769-L32C, 1769-L35CR, 1769-L32E, 1769-L32EK, 1769-L35E
1768 Controllers	1768-L43, 1768-L43S, 1768-L45, 1768-L45S
Memory Cards	1784-CF128, 1784-SD1, 1784-SD2

CompactLogix 5370 Controllers


CompactLogix 5370 L1 Control System



CompactLogix 5370 L2 Control System

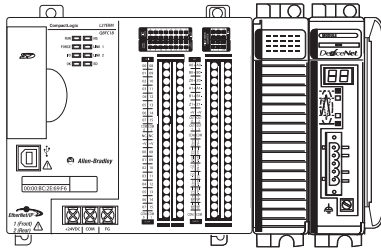

CompactLogix 5370 L3 Control System

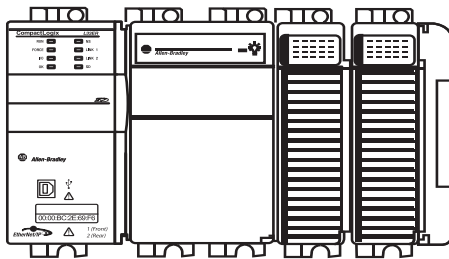


CompactLogix 5370 controllers provide scalable controller solutions to address a wide variety of applications. All CompactLogix 5370 controllers provide the following functionality:

- Two Ethernet ports
- One USB port
- Support for local expansion modules
- Control of local and distributed I/O modules
- Use of 1784-SD1 or 1784-SD2 Secure Digital (SD) card for nonvolatile memory
- A battery is no longer necessary because of the internal energy-storage solution

Some CompactLogix 5370 controllers provide the following functionality:

- Built-in power supply
- Some combination of embedded digital, analog, and high-speed counter modules
- Support for Integrated Motion over an EtherNet/IP™ network
- Access to DeviceNet® networks

Compact GuardLogix 5370 Control System

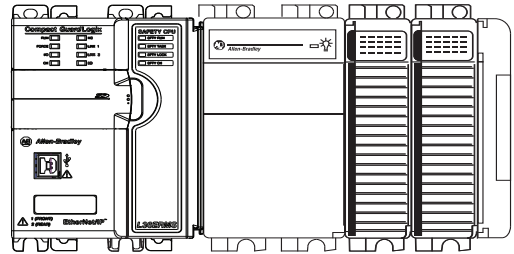

The Compact GuardLogix controller is a 1769-L3 CompactLogix controller that provides safety control to achieve SIL CL 3 according to EN62061 / EN 61511-1 / IEC 61508 and PLe according to EN ISO 13849-1. A major benefit of this system is that it's still one project; safety and standard control together.

Application	Description
SIL 1, 2, 3	The Compact GuardLogix controller system is type-approved and certified for use in safety applications up to and including SIL 3 according to IEC 61508, and applications up to and including PLe/Cat.4 according to ISO 13849-1. For more information, see these manuals: • GuardLogix 5570 and Compact GuardLogix 5370 Controllers Systems Safety Reference Manual, publication 1756-RM099 • Compact GuardLogix 5370 Controllers User Manual, publication 1769-UM002 • GuardLogix Safety Application Instruction Set Reference Manual, publication 1756-RM095

During development, safety and standard have the same rules. The following are allowed:

- Multiple programmers
- Online editing
- Forcing

Once the project is tested and ready for final validation, apply the safety application signature and safety-lock the application. This process sets the safety task to a SIL 3 integrity level. The Compact GuardLogix controller enforces the SIL 3 integrity level. When safety memory is locked and protected, the safety logic can't be modified and all safety functions operate with SIL 3 integrity. On the standard side of the Compact GuardLogix controller, all functions operate like a regular Logix controller. Thus online editing, forcing, and other activities are all allowed.

Standard logic and external devices, like HMI's or other controllers, can read safety memory with this level of integration. This level of integration removes the need to condition safety memory for use elsewhere. The result is easy systemwide integration and the ability to display safety status on displays or marquees. Use Guard I/O™ modules for field device connectivity. For safety interlocking between Compact GuardLogix controllers, use Ethernet or ControlNet® networks. Multiple Compact GuardLogix controllers can share safety data for zone to zone interlocking, or one Compact GuardLogix controller can use remote distributed safety I/O between different cells/areas.

Features - CompactLogix 5370 Controllers and Compact GuardLogix 5370 Controllers

Feature	1769-L16ER-BB1B 1769-L18ER-BB1B 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK 1769-L19ER-BB1B, 1769-L19ER-BB1BK	1769-L24ER-QB1B 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK 1769-L27ERM-QBFC1B	1769-L30ER, 1769-L30ERK 1769-L30ER-NSE 1769-L30ERM, 1769-L30ERMK 1769-L33ER, 1769-L33ERK 1769-L33ERM, 1769-L33ERMK, 1769-L36ERM, 1769-L37ERM, 1769-L37ERMK, 1769-L38ERM, 1769-L38ERMK	1769-L30ERMS 1769-L33ERMS, 1769-L33ERMSK 1769-L36ERMS 1769-L37ERMS, 1769-L37ERMSK 1769-L38ERMS, 1769-L38ERMSK
Controller tasks Continuous Periodic	32 tasks 100 programs/task			
Built-in communication ports	- Two Ethernet ports - CompactLogix 5370 controllers have two Ethernet ports. The ports carry the same network traffic as part of the embedded switch of the controller. However, the controller uses only one IP address. - One USB port (only for temporary connection).			
Communication options	EtherNet/IP	- EtherNet/IP - DeviceNet via 1769-SDN scanner		
EtherNet/IP node, max	1769-L16ER-BB1B: Up to 4 nodes 1769-L18ER-BB1B, 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK, 1769-L19ER-BB1B, 1769-L19ER-BB1BK: Up to 8 nodes	1769-L24ER-QB1B, 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK: Up to 8 nodes 1769-L27ERM-QBFC1B: Up to 16 nodes	1769-L30ER, 1769-L30ER-NSE, 1769-L30ERK, 1769-L30ERM, 1769-L30ERMK, 1769-L30ERMS: Up to 16 nodes 1769-L33ER, 1769-L33ERK, 1769-L33ERM, 1769-L33ERMK, 1769-L33ERMS, 1769-L33ERMSK: Up to 32 nodes 1769-L36ERM, 1769-L36ERMS: Up to 48 nodes 1769-L37ERM, 1769-L37ERMK, 1769-L37ERMS, 1769-L37ERMSK: Up to 64 nodes 1769-L38ERM, 1769-L38ERMK, 1769-L38ERMS, 1769-L38ERMSK: Up to 80 nodes	
Controller connections	256			
Embedded I/O modules	16 DC digital inputs 16 DC digital outputs	All controllers: 16 DC digital inputs 16 DC digital outputs Only 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK, and 1769-L27ERM-QBFC1B: 4 high-speed counter modules 4 high-speed counter module outputs 4 universal analog inputs 2 analog output points	-	
Sockets, max	32			
Integrated Motion over an EtherNet/IP network	1769-L18ERM-BB1B, 1769-L18ERM-BB1BK: 1 or 2 axes	1769-L27ERM-QBFC1B - As many as 4 axes	1769-L30ERM, 1769-L30ERMK, 1769-L30ERMS: As many as 4 axes 1769-L33ERM, 1769-L33ERMK, 1769-L33ERMS, 1769-L33ERMSK: As many as 8 axes 1769-L36ERM, 1769-L36ERMS: As many as 16 axes 1769-L37ERM, 1769-L37ERMK, 1769-L37ERMS, 1769-L37ERMSK: As many as 16 axes 1769-L38ERM, 1769-L38ERMK, 1769-L38ERMS, 1769-L38ERMSK: As many as 16 axes	
Programming languages	- Relay ladder⁽¹⁾ - Structured Text - Function block - SFC			
Integrated safety	-			Yes

(1) The Compact GuardLogix 5370 controllers support only the relay ladder programming language in the safety task. The Compact GuardLogix 5370 controllers support all listed programming languages in the standard task.

Certifications - CompactLogix 5370 Controllers and Compact GuardLogix 5370 Controllers

Certification ⁽¹⁾	1769-L16ER-BB1B 1769-L18ER-BB1B 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK 1769-L19ER-BB1B, 1769-L19ER-BB1BK	1769-L24ER-QB1B 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK 1769-L27ERM-QBFC1B	1769-L30ER, 1769-L30ERK 1769-L30ER-NSE 1769-L30ERM, 1769-L30ERMK 1769-L33ER, 1769-L33ERK 1769-L33ERM, 1769-L33ERMK 1769-L36ERM 1769-L37ERM, 1769-L37ERMK 1769-L38ERM, 1769-L38ERMK	1769-L30ERMS 1769-L33ERMS, 1769-L33ERMSK 1769-L36ERMS 1769-L37ERMS, 1769-L37ERMSK 1769-L38ERMS, 1769-L38ERMSK
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810.	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E322657. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E334470.	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810.	
UKCA and CE	UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with: EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-4; Industrial Emissions EN 61000-6-2; Industrial Immunity		UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with: EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) EN 61000-6-4; Industrial Emissions EN 61000-6-2; Industrial Immunity	UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with: EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) EN 61326-3-1; Meas./Control/Lab., Immunity Requirements for safety systems and functions EN 61000-6-4; Industrial Emissions EN 61000-6-2; Industrial Immunity
	UK Statutory Instrument 2008 No. 1597 and European Union 2006/42/EC MD Directive, compliant with: EN 61508-1...7; General requirements EN ISO 13849-1; Safety-related parts of control systems EN 62061; Functional safety of safety-related control systems			
	UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS Directive, compliant with: EN IEC 63000; Technical documentation			
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions			
IECEX	—	IECEX System, compliant with: IEC 60079-0; General Requirements IEC 60079-7; Explosive Atmospheres, Protection "e" II 3 G Ex ec IIC T4 Gc IECEX UL 21.0112X	—	
Ex	European Union 2014/34/EU ATEX Directive, compliant with: EN 60079-0; General Requirements EN 60079-15; Potentially Explosive Atmospheres, Protection "n"			-
	II 3 G Ex nA IIC T4 Gc ITS 12 ATEX 47611X (until Rev. 3)	II 3 G Ex nA IIC T4 Gc DEMKO 12 ATEX 1116807X (until Rev. 3)	II 3 G Ex nA IIC T4 Gc ITS 09 ATEX 46118X (until Rev. 6)	
	Or			
	UK Statutory Instrument 2016 No. 1107 and European Union 2014/34/EU ATEX Directive, compliant with: EN 60079-0; General Requirements EN 60079-7; Potentially Explosive Atmospheres, Protection "e"			
	II 3 G Ex ec IIC T4 Gc UL 21 ATEX 2603X (from Rev. 1) UL 22 UKEX 2515X (from Rev. 0)	II 3 G Ex ec IIC T4 Gc DEMKO 12 ATEX 1116807X (from Rev. 4) UL 22 UKEX 2516X (from Rev. 0)	II 3 G Ex ec IIC T5 Gc UL 21 ATEX 2603X (from Rev. 0) UL 22 UKEX 2515X (from Rev. 0)	II 3 G Ex ec IIC T5 Gc DEMKO 15 ATEX 1388X UL 22 UKEX 2514X (from Rev. 0)
TÜV	—			TÜV Certified for Functional Safety Capable of SIL 3
Morocco	Arrêté ministériel n° 6404-15 du 29 ramadan 1436			
CCC	CNCA-C23-01:2019 强制性产品认证实施规则 防爆电气 CNCA-C23-01:2019 CCC Implementation Rule Explosion-Proof Electrical Products CCC: 2020122309111609, 2021122309113974, 2021312309000565			
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3			
EtherNet/IP	ODVA conformance tested to EtherNet/IP specifications.			

(1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

Environmental Specifications - CompactLogix 5370 Controllers and Compact GuardLogix 5370 Controllers

Attribute	1769-L16ER-BB1B 1769-L18ER-BB1B 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK 1769-L19ER-BB1B, 1769-L19ER-BB1BK	1769-L24ER-QB1B 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK 1769-L27ERM-QBFC1B	1769-L30ER, 1769-L30ERK 1769-L30ER-NSE 1769-L30ERM, 1769-L30ERMK 1769-L33ER, 1769-L33ERK 1769-L33ERM, 1769-L33ERMK 1769-L36ERM, 1769-L37ERM, 1769-L37ERMK 1769-L38ERM, 1769-L38ERMK	1769-L30ERMS 1769-L33ERMS, 1769-L33ERMSK 1769-L36ERMS 1769-L37ERMS, 1769-L37ERMSK 1769-L38ERMS, 1769-L38ERMSK	1769-L23-QBFC1B 1769-L23E-QB1B 1769-L23E-QBFC1B
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock)	-20...+60 °C (-4...+140 °F)	0...60 °C (32...140 °F)			
Temperature, storage IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)				
Temperature, surrounding air, max	60 °C (140 °F)				
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing				
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz ⁽¹⁾		5 g @ 10...500 Hz		
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g ⁽¹⁾		20 g - DIN rail 30 g - Panel		
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	50 g ⁽¹⁾⁽²⁾		30 g - DIN rail 40 g - Panel		
Emissions CISPR 11	IEC 61000-6-4				
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges				4 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz				10V/m with 200 Hz 50% Pulse 100% AM at 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 1890 MHz 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±3 kV at 5 kHz on power ports ±3 kV at 5 kHz on signal ports ±3 kV at 5 kHz on communication ports		±3 kV at 5 kHz on communication ports	±3 kV at 5 kHz on communication ports ±4 kV at 5 kHz on Protective Earth (PE)	±2 kV at 5 kHz on power ports ±2 kV at 5 kHz on signal ports ±2 kV at 5 kHz on communication ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports ±2 kV line-earth (CM) on communication ports	±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports ±2 kV line-earth (CM) on shielded ports ±2 kV line-earth (CM) on communication ports	±2 kV line-earth (CM) on communication ports		±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports ±2 kV line-earth (CM) on shielded ports ±2 kV line-earth (CM) on communication ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz				

(1) If you are mounting a CompactLogix™ 5370 L1 controller on an EN 50 022 - 35 x 15 mm (1.38 x 0.59 in.) DIN rail, you must first adhere a bumper on the back of the controller. Failure to install the bumper before mounting the controller causes the system to fail to meet this specification. For more information, see the CompactLogix 5370 Controllers User Manual, publication [1769-UM021](#).

(2) If you are mounting a CompactLogix 5370 L1 controller on an EN 50 022 - 35 x 15 mm (1.38 x 0.59 in.) DIN rail, the Shock, nonoperating specification = 30 g.

Technical Specifications - CompactLogix 5370 Controllers and Compact GuardLogix 5370 Controllers

Attribute	1769-L16ER-BB1B 1769-L18ER-BB1B 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK 1769-L19ER-BB1B, 1769-L19ER-BB1BK	1769-L24ER-QB1B 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK 1769-L27ERM-QBFC1B	1769-L30ER, 1769-L30ERK 1769-L30ER-NSE 1769-L30ERM, 1769-L30ERMK 1769-L33ER, 1769-L33ERK, 1769-L33ERM, 1769-L33ERMK 1769-L36ERM 1769-L37ERM, 1769-L37ERMK 1769-L38ERM, 1769-L38ERMK	1769-L30ERMS 1769-L33ERMS, 1769-L33ERMSK 1769-L36ERMS 1769-L37ERMS, 1769-L37ERMSK 1769-L38ERMS, 1769-L38ERMSK
User memory	1769-L16ER-BB1B: 384 KB 1769-L18ER-BB1B, 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK: 512 KB 1769-L19ER-BB1B, 1769-L19ER-BB1BK: 1 MB	1769-L24ER-QB1B, 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK: 750 KB 1769-L27ERM-QBFC1B: 1 MB	1769-L30ER, 1769-L30ER-NSE, 1769-L30ERK, 1769-L30ERM, 1769-L30ERMK: 1 MB 1769-L33ER, 1769-L33ERK, 1769-L33ERM, 1769-L33ERMK: 2 MB 1769-L36ERM: 3 MB 1769-L37ERM, 1769-L37ERMK: 4 MB 1769-L38ERM, 1769-L38ERMK: 5 MB	1769-L30ERMS: 1 MB standard + 0.5 MB safety 1769-L33ERMS, 1769-L33ERMSK: 2 MB standard + 1 MB safety 1769-L36ERMS: 3 MB standard + 1.5 MB safety 1769-L37ERMS, 1769-L37ERMSK: 4 MB standard + 1.5 MB safety 1769-L38ERMS, 1769-L38ERMSK: 5 MB standard + 1.5 MB safety
Optional nonvolatile memory	1784-SD1 card with 1 Gb of available memory (shipped with controller) 1784-SD2 card with 2 Gb of available memory (available for separate ordering)			
Number of local expansion modules, max ⁽¹⁾	1769-L16ER-BB1B: 6 - 1734 POINT I/O™ modules 1769-L18ER-BB1B, 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK, 1769-L19ER-BB1B, 1769-L19ER-BB1BK: 8 - 1734 POINT I/O modules	4 - 1769 Compact I/O™ modules	1769-L30ER, 1769-L30ER-NSE, 1769-L30ERK, 1769-L30ERM, 1769-L30ERMK, 1769-L30ERMS: 8 - 1769 Compact I/O modules 1769-L33ER, 1769-L33ERK, 1769-L33ERM, 1769-L33ERMK, 1769-L33ERMS, 1769-L33ERMSK: 16 - 1769 Compact I/O modules 1769-L36ERM, 1769-L36ERMS: 30 - 1769 Compact I/O modules 1769-L37ERM, 1769-L37ERMK, 1769-L37ERMS, 1769-L37ERMSK: 31 - 1769 Compact I/O modules 1769-L38ERM, 1769-L38ERMK, 1769-L38ERMS, 1769-L38ERMSK: 31 - 1769 Compact I/O modules	
Number of I/O module banks, max	–	1	3	
Current draw @ 5V DC, controller power	1 A	1769-L24ER-QB1B: 1.54 A 1769-L24ER-QBFC1B, 1769-L27ERM-QBFC1B: 1 A Values rated at these ambient temperatures: 40 °C (104 °F), 55 °C (131 °F), 60 °C (140 °F).	500 mA	850 mA
Current draw @ 24V DC, controller power	–	1769-L24ER-QB1B: 0.95 A 1769-L24ER-QBFC1B, 1769-L27ERM-QBFC1B: 0.8 A Values rated at these ambient temperatures: 40 °C (104 °F), 55 °C (131 °F), 60 °C (140 °F).	225 mA	700 mA
Current draw @ 24V DC, field power, max	3 A - Combined total for all devices that draw current from field power connections Input: 5 mA Output: 500 mA	–		
Power dissipation, max	11.5 W	1769-L24ER-QB1B: 12 W 1769-L24ER-QBFC1B, L27ERM-QBFC1B: 21 W	4.5 W	6.5 W
Isolation voltage	50V (continuous), Basic Insulation Type Tested at 500V AC for 60 s, System to Field	30V (continuous), Basic Insulation Type, USB to system, Ethernet to system and Ethernet to Ethernet Type tested at 500V AC for 60 s		50V, Basic Insulation Type Tested at 500V AC for 60 s, System to Communication ports.
Short circuit protection, field power	Internal fuse, Non-replaceable	–		
Recommended external short circuit protection, field power	User-provided 4...5 A @ 3.15...5.5 A ² t fuse	–		
Weight, approx	0.66 kg (1.5 lb)	1769-L24ER-QB1B: 0.63 kg (1.39 lb) 1769-L24ER-QBFC1B, 1769-L27ERM-QBFC1B: 0.9 kg (1.9 lb)	0.31 kg (0.68 lb)	0.54 kg (1.18 lb)
Module width	100.00 mm (3.94 in.)	1769-L24ER-QB1B: 115.00 mm (4.53 in.) 1769-L24ER-QBFC1B and 1769-L27ERM-QBFC1B: 140 mm (5.51 in.)	55.00 mm (2.17 in.)	89.00 mm (3.50 in.)
Module location	DIN rail mount	DIN rail or panel mount		
Panel-mount screw torque	–	1.1...1.8 N•m (10...16 lb•in) - use M4 or #8 screws		
Embedded power supply	24V DC input, isolated	24V DC Input, isolated	1769-PA2, 1769-PB2, 1769-PA4, 1769-PB4	

Technical Specifications - CompactLogix 5370 Controllers and Compact GuardLogix 5370 Controllers (Continued)

Attribute	1769-L16ER-BB1B 1769-L18ER-BB1B 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK 1769-L19ER-BB1B, 1769-L19ER-BB1BK	1769-L24ER-QB1B 1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK 1769-L27ERM-QBFC1B	1769-L30ER, 1769-L30ERK 1769-L30ER-NSE 1769-L30ERM, 1769-L30ERMK 1769-L33ER, 1769-L33ERK, 1769-L33ERM, 1769-L33ERMK 1769-L36ERM 1769-L37ERM, 1769-L37ERMK 1769-L38ERM, 1769-L38ERMK	1769-L30ERMS 1769-L33ERMS, 1769-L33ERMSK 1769-L36ERMS 1769-L37ERMS, 1769-L37ERMSK 1769-L38ERMS, 1769-L38ERMSK
Power supply distance rating	-		- Controller and 1769-SDN: 4 1769 Compact I/O modules: 4...8, depending on module	4 (3 I/O modules between controller and power supply)
Wire category ⁽²⁾	1 - signal ports 1 - power ports 2 - communication ports		2 - communication ports	
Wire type, Ethernet	RJ45 connector according to IEC 60603-7, 2 or 4 pair Category 5e minimum cable according to TIA 568 B.1 or Category 5 cable according to ISO/IEC 24702			
Wire type, power terminals, and embedded I/O connections	Copper		-	
Wire size, power terminals ⁽³⁾	0.051...3.31 mm ² (30...12 AWG) solid or stranded copper wire rated at 90 °C (194 °F), or greater, 1.2 mm (3/64 in.) insulation, max Each terminal accepts 1 or 2 wires	0.25...2.50 mm ² (22...14 AWG) solid copper wire rated at 75 °C (167 °F), or greater 1.2 mm (3/64 in.) insulation, max Each terminal accepts only 1 wire	-	
Wire stripping length, power terminals ⁽³⁾	10 mm (0.39 in)	8 mm (0.31 in)	-	
Screw torque, power terminals ⁽³⁾	0.5...0.6 N•m (4.4...5.3 lb•in)	1.0...1.2 N•m (8.9...10.6 lb•in)	-	
Wire size, embedded I/O connections	0.205...1.31 mm ² (24...16 AWG) solid or stranded copper wire rated at 90 °C (194 °F), or greater 1.2 mm (3/64 in.) insulation, max or 90 °C (194 °F) Each terminal accepts only 1 wire		-	
Wire stripping length, embedded I/O connections	10 mm (0.39 in)		-	
North American temperature code	T4A	T3C	T5	
IECEX temperature code	-	T4	-	
UKEX/ATEX temperature code	T4		T5	
Enclosure type rating	None (open-style)			

- (1) You can use up to the maximum number of local expansion modules with the CompactLogix 5370 L1 controllers that are listed. This condition applies only if the total current drawn by the embedded I/O and local expansion modules does not exceed both the available POINTBus™ backplane current of 1 A and the field power current of 3 A. For more information on POINTBus backplane current and field-power current considerations when installing local expansion modules, see [page 9](#).
- (2) Use this Conductor Category information to plan conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#) and the appropriate system-level installation manual.
- (3) In regard to the CompactLogix 5370 L1 controllers, this specification applies to connecting wires to the power connector that is inserted in the controller. In regard to the CompactLogix 5370 L2 controllers, this specification applies to connecting wires to power terminals built into the controller.

Real-time Clock Accuracy

This table lists the real-time clock accuracy specifications for the CompactLogix 5370 controllers.

Ambient Temperature	Accuracy
0 °C (32 °F)	-143...+42 s/mo
25 °C (77 °F)	-78...+91 s/mo
40 °C (104 °F)	-101...+73 s/mo
60 °C (140 °F)	-204...-4.50 s/mo

Real-time Clock Hold-up Times

This table lists the typical real-time clock hold-up specifications for the CompactLogix 5370 controllers.

IMPORTANT The values in this table are typical and can vary with some CompactLogix 5370 control systems.

Ambient Temperature	Holdup Time, Typical
0 °C (32 °F)	40 days
25 °C (77 °F)	35 days
40 °C (104 °F)	28 days
60 °C (140 °F)	16 days

The I/O module support for CompactLogix 5370 controller systems varies by controller.

I/O Module Support - CompactLogix 5370 L1 Controllers

The CompactLogix 5370 L1 controllers offer an embedded I/O module and the option to use 1734 POINT I/O modules as local expansion modules.

The embedded I/O module provides the following:

- 16 sinking 24V DC digital input points
- 16 sourcing 24V DC digital output points


To use 1734 POINT I/O modules as local expansion modules, keep in mind the following:

- Local expansion modules must be installed in the same system as the CompactLogix 5370 L1 controller.
- The modules are installed to the right of the controller.
- The maximum number of local expansion modules available depends on the controller catalog of that system.

This table lists the number of 1734 POINT I/O modules the CompactLogix 5370 L1 controllers support. The minimum RPI of each I/O module is 1.0 ms and can be changed by 0.5 ms increments. You can use the maximum number of 1734 POINT I/O modules with these CompactLogix 5370 L1 controllers. The total current that the embedded I/O and local expansion modules draw can't exceed both the available POINTBus backplane current of 1 A and the field power current of 3 A.

1769-L1 Controllers - Local I/O Module Support

Cat. No.	Local 1734 POINT I/O Modules Supported, Max
1769-L16ER-BB1B	6
1769-L18ER-BB1B	8
1769-L18ERM-BB1B, 1769-L18ERM-BB1BK	
1769-L19ER-BB1B, 1769-L19ER-BB1BK	

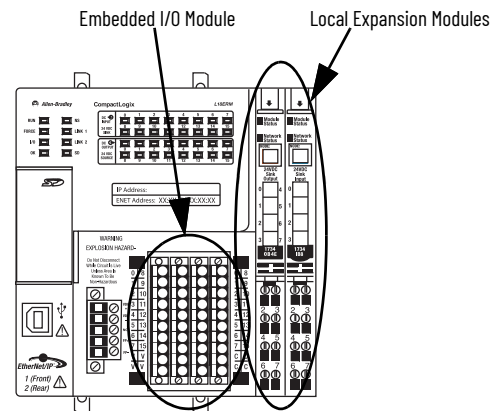

Depending on the configuration of your application, you can use one of these devices to make additional POINTBus backplane current or field power current available:

Device	Description
1734-EP24DC	POINT I/O Expansion Power Supply - An expansion power supply is installed between embedded I/O modules and local expansion modules or between local expansion modules. The expansion power supply breaks the available POINTBus backplane current between the modules to its left and right. With the expansion power supply installed, the modules to its left can draw up to 1 A of POINTBus backplane current. The modules to the right of the expansion power supply can draw as much current as the current provided by the expansion power supply. Additionally, the expansion power supply breaks the available field power current between the modules to its left and right. With the expansion power supply installed, the modules to its left can draw up to 3 A of field power current. The modules to the right of the expansion power supply can draw as much field power current as allowed by the expansion power supply. For more information on the 1734-EP24DC expansion power supply, see the POINT I/O 24V DC Expansion Power Supply Installation Instructions, publication 1734-IN058.
1734-FPD	POINT I/O Field Power Distributor Module - A field power distributor module can also be installed between embedded I/O modules and local expansion modules or between local expansion modules. The field power distributor module breaks the available field power current between the modules to its left and right. With the field power distributor module installed, the modules to its left can draw up to 3 A of field power current. The modules to the right of the field power distributor can draw as much field power current as allowed by the field power distributor. For more information on the 1734-FPD POINT I/O Field Power Distributor module, see the POINT I/O Field Power Distributor Module Installation Instructions, publication 1734-IN059. IMPORTANT: Remember, the field power distributor module changes only the level of field power current available in the system. The module does not affect the level of POINTBus backplane current available.

Local I/O Performance of the CompactLogix 5371 L1 Controllers

The requested packet interval (RPI) defines the frequency at which the controller sends data to and receives data from I/O modules. You set an RPI rate for each I/O module in your system.

CompactLogix 5370 L1 controllers always attempt to scan an I/O module at the configured RPI rate. For individual I/O modules, a Module RPI Overlap minor fault occurs if there are enough I/O modules with RPI rates set too fast that they can't all be serviced in the allotted interval.

The specific configuration parameters for a system determine the impact on actual RPI rates. These configuration factors can impact the effective scan frequency for any individual module:

- Rates at which the RPI rates of other 1734 POINT I/O modules are set
- Number of other 1734 POINT I/O modules in the system
- Types of other 1734 POINT I/O modules in the system
- Application user task priorities

In general, follow these guidelines when setting the RPI rates in a CompactLogix 5370 L1 control system:

Module Type	Guidelines
Digital	• 1...2 modules can be scanned in 2 ms. • 3...4 modules can be scanned in 4 ms. • 5...8 modules can be scanned in 8 ms. IMPORTANT: Remember that digital modules can be the embedded I/O module on the controller or 1734 POINT I/O modules that are used as local expansion modules. Therefore, the consideration for using two modules can be the embedded I/O module and a 1734 POINT I/O module or two 1734 POINT I/O modules.
Specialty and Analog	• 1 module can be scanned at 20 ms. • For each additional module, add 20 ms. For example, if a CompactLogix 5370 L1 control system uses two analog modules, the module can be scanned in 40 ms.
1734-485ASC	The total data size for all ASC modules determines the RPI rates: • For total data size less than 20 bytes, each module can be scanned in 20 ms. • For data size greater than 20 bytes, use the size value as the RPI. For example, if the total data size is 40 bytes, each ASC module can be scanned in 40 ms.

You aren't required to set the RPI values of an individual 1734 POINT I/O module to the values listed previously. For example, if your application scans one or two modules, you do not have to use RPI rates of 2 ms. Remember, though, that higher RPI rates result in scanning the data less frequently.

The RPI shows how quickly modules can be scanned, not how quickly an application can use the data. The RPI is asynchronous to the program scan. Other factors, such as program execution duration, affect I/O throughput.

Embedded Specifications - CompactLogix 5371 L1 Controllers

Attribute	1769-L16ER-BB1B, 1769-L18ER-BB1B, 1769-L18ERM-BB1B, 1769-L18ERM-BB1BK, 1769-L19ER-BB1B, 1769-L19ER-BB1BK
Embedded DC Input Specifications	
Inputs	16
Voltage category	24V DC sink
Operating voltage range	10...28.8V DC 24V DC nom
Digital filter, off to on/on to off	0.5 ms hardware plus 0...65 ms (selectable)
Input delay, off to on/on to off	
Off-state voltage, max	5V DC
Off-state current, max	1 mA
On-state current, min	2 mA @ 24V DC
Input impedance, max	5.4 kΩ
Cyclic update time	1...750 ms
Isolation voltage	50V DC (continuous), Basic Insulation Type Tested at 500V AC for 60 s, system to field No isolation between individual channels
IEC input compatibility	Type 3
Isolated groups	None
Embedded DC Output Specifications	
Outputs	16
Voltage category	24V DC source
Operating voltage range	10...28.8V DC 24V DC nom
Output delay, off to on	0.1 ms
Output delay, on to off	0.1 ms
Off-state leakage current, max	0.5 mA @ 24V DC
On-state current, min	1 mA per channel
On-state voltage drop, max	0.6V DC
Current per point, max	0.5 A
Current per module, max	3 A
Surge current per point, max	1 A for 100 ms per point, repeatable every 2 s
Isolation voltage	50V DC (continuous), Basic Insulation Type Tested at 500V AC for 60 s, system to field No isolation between individual channels
Isolated groups	None
Pilot duty rating	0.5 A
Embedded Power Supply Specifications	
Input voltage range	10...28.8V DC
Input voltage, nom	24V DC
Line requirement (VDC), min	30VA
Available 5V DC POINTBus backplane current	1 A @ 5V DC
Current draw @ 24V DC, field power, max	3 A ⁽¹⁾
Inrush, max	10 A
Line loss ride-through	10 ms...10 s
Output bus current capacity, max	0.1...3 A @ 5V DC
Load current, min	300 mA
Power dissipation, max	12 W
Short circuit protection	Internal fuse Not replaceable
Overvoltage protection	Yes

(1) Combined total for all devices that draw current from field power connections.

CompactLogix 5370 L2 Controller Local I/O Performance

The Requested Packet Interval (RPI) defines the frequency at which the controller sends data to and receives data from I/O modules. You set an RPI rate for each I/O module in your system in the programming software. You also set RPI rates through the programming software for embedded I/O modules, local expansion modules, and distributed I/O modules over an EtherNet/IP network.

The CompactLogix 5370 L2 controllers always attempt to scan an I/O module at the configured RPI rate. The controller scans distributed I/O modules at the configured RPI rates.

With embedded I/O modules and local expansion modules, however, some specific system-configuration parameters determine the actual rate at which the controller scans the modules. That is, the controller can be configured to scan an I/O module at one rate, but actually scan the module at another rate.

For individual I/O modules, a Module RPI Overlap minor fault occurs if there is at least one I/O module that can't be serviced within its RPI time.

The specific configuration parameters for a system determine the impact on actual RPI rates. These configuration factors can impact the effective scan frequency for any individual embedded or local expansion module:

- Rates at which the RPI values of the embedded I/O modules are set
- Number of embedded I/O modules that are used in the system
- Types of embedded I/O modules that are used in the system
- Rates at which RPI values for the 1769 Compact I/O module are set
- Number of 1769 Compact I/O modules in the system
- Types of 1769 Compact I/O modules in the system
- Application user task priorities

RPI Rate Guidelines

Type of Module	Guidelines
Digital and analog (any mix)	The following guidelines apply: • 1...2 modules can be scanned in 0.5 ms. • 3...4 modules can be scanned in 1 ms. • 5...6 modules can be scanned in 2 ms. • Some input modules have a fixed 8 ms filter, so selection of a faster RPI has no effect.
Specialty	The following conditions apply: • For every full-sized 1769-SDN module in the system, increase the RPI of every other module by 2 ms. • For every 1769-HSC module in the system, increase the RPI of every other module by 1 ms. • For every full-sized 1769-ASCII module system, increase the RPI of every other module by 1 ms. • For every 1769-SM2 module in the system, increase the RPI of every other module by 2 ms. For example, the system includes four I/O modules that are configured with an RPI = 1 ms and you add a 1769-SDN module to the system. You must increase the RPI value for all four I/O modules by 2 ms. Therefore, when the 1769-SDN module is added to the system, the four I/O modules use an RPI = 3 ms. If, in the same system, you add a second 1769-SDN module, the RPI value of the four I/O modules is increased to 5 ms.

IMPORTANT

The number of I/O modules can be the embedded I/O modules on the controller or 1769 Compact I/O modules that are used as local expansion modules.

Therefore, the consideration for using modules can be any of the following system configurations:

- Only embedded I/O modules
- Only 1769 Compact I/O modules
- Some combination of embedded I/O modules and 1769 Compact I/O modules



You can set individual RPI rates for 1769 Compact I/O modules higher than those values listed in this table. The RPI shows how quickly modules can be scanned, not how quickly an application can use the data. The RPI is asynchronous to the program scan. Other factors, such as program execution duration, affect I/O throughput.

Embedded DC Specifications - CompactLogix 5370 L2 Controllers

Attribute	1769-L24ER-Q8B1B	1769-L24ER-Q8FC1B 1769-L24ER-Q8FC1BK 1769-L27ERM-Q8FC1B
Embedded DC Input Specifications		
Inputs	16	
Voltage category	24V DC sink/source	
Operating voltage range	10...28.8V DC @ 40 °C (104 °F) 10...26.4V DC @ 60 °C (140 °F) 24V DC nom	10...28.8V DC @ 40 °C (104 °F) 10...27.0V DC @ 55 °C (131 °F) 10...26.4V DC @ 60 °C (140 °F) 24V DC nom
Digital filter, off to on and on to off	0 s, 100 µs, 500 µs, 1 ms, 2 ms, 4 ms, 8 ms	
Input delay, off to on and on to off	100 µs, min 8 ms, max	
Off-state voltage, max	5V DC	
Off-state current, max	1.5 mA	
On-state current, min	2 mA @ 24V DC per channel	
On-state current, max	5 mA @ 24V DC per channel	
Input impedance, max	5.2 kΩ @ 24V DC 6.1 kΩ @ 30V DC	
Cyclic update time	0.5...750 ms	
Isolation voltage	75V (continuous), Reinforced Insulation Type Type tested at 1200V AC for 1 s and at 1700V DC for 1 s; group to system, group to group	
IEC input compatibility	Type 3	
Isolated groups	Group 1: inputs 0...7 Group 2: inputs 8...15 Isolated groups operate in either sink or source configurations	
Embedded DC Output Specifications		
Outputs	16	
Voltage category	24V DC source	
Operating voltage range	20.4...26.4V DC 24V DC nom	
Output delay, off to on	0.05 ms	
Output delay, on to off	0.5 ms	
Off-state leakage current, max	0.1 mA @ 26.4V DC	
On-state current, max	0.5 mA @ 24V DC per channel	
On-state voltage drop, max	1.0V DC @ 1.0 A	
Current per point, max	0.83 A @ 40 °C (104 °F) 0.5 A @ 60 °C (140 °F)	0.83 A @ 40 °C (104 °F) 0.58 A @ 55 °C (131 °F) 0.5 A @ 60 °C (140 °F)
Current per module, max	6.64 A @ 40 °C (104 °F) 4.0 A @ 60 °C (140 °F)	6.64 A @ 40 °C (104 °F) 4.64 A @ 55 °C (131 °F) 4.0 A @ 60 °C (140 °F)
Surge current per point, max	2.0 A for 10 ms per point, repeatable every 2 s	
Isolation voltage	75V (continuous), Reinforced Insulation Type Type tested at 1200V AC for 1 s and at 1700V DC for 1 s; group to system, group to group	
Isolated groups	Group 1: Outputs 0...7 Group 2: Outputs 8...15	

Embedded DC Output Temperature Derating

The area within the curves represents the safe operating range for the embedded DC outputs under various conditions of user-supplied voltages and ambient temperatures.

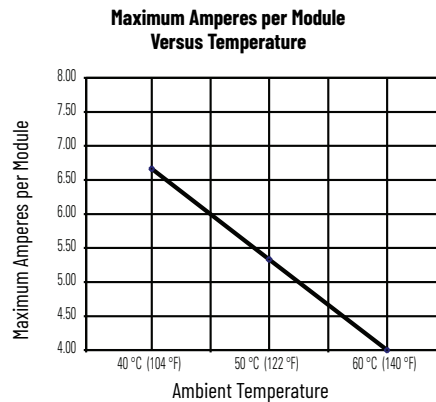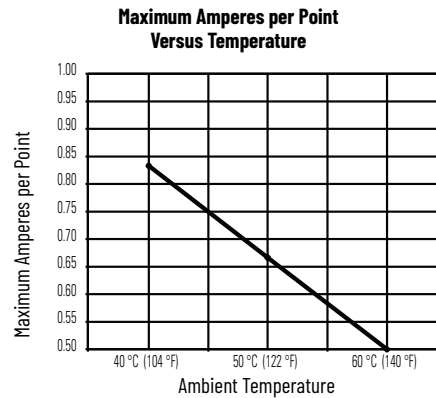

Embedded Analog Input Specifications - CompactLogix 5370 L2 Controllers

Attribute	1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK, 1769-L27ERM-QBFC1B
Inputs	4 channels of thermocouple/voltage/current 2 channels of RTD/Resistance inputs
Operating voltage range	2.6...30.0V DC @ 40 °C (104 °F) 2.6...26.4V DC @ 55 °C (131 °F) 2.6...5V DC @ 60 °C (140 °F)
Input types	- Thermocouple: J, K, T, E, R, S, B, N, and C - Voltage - Current - RTD: Platinum 385, Platinum 3916, Copper 426, Nickel 672, Nickel 618, Nickel-Iron 518 - Resistance
Input ranges ⁽¹⁾	Thermocouple: - K at 1370...1372 °C (2498...2501.6 °F) - K at -170...+1370 °C (-274...+2498 °F) - K at -200...+1370 °C (-328...+2498 °F) - S and R at 0...1768 °C (32...3214.4 °F) - S and R at -50...0 °C (-58...+32 °F) - B at 300...1820 °C (572...3308 °F) - B at 250...300 °C (482...572 °F) - J at -210...+1200 °C (-328...+2192 °F) - T at -170...+400 °C (-274...+752 °F) - T at -200...-170 °C (-328...-274 °F) - E at -200...+1000 °C (-328...+1832 °F) - N at -110...+1300 °C (-166...+2372 °F) - N at -200...-110 °C (-328...-166 °F) - C at 0...2315 °C (32...4199 °F) Voltage: -50...+50 mV -100...+100 mV 0...5V 1...5V 0...10V -10V...+10V Current: 0...20 mA 4...20 mA RTD: 0...100 Ω Platinum 385 0...200 Ω Platinum 385 0...500 Ω Platinum 385 0...1000 Ω Platinum 385 0...100 Ω Platinum 3916 0...200 Ω Platinum 3916 0...500 Ω Platinum 3916 0...1000 Ω Platinum 3916 0...10 Ω Copper 426 0...120 Ω Nickel 618 0...120 Ω Nickel 672 0...604 Ω Nickel-Iron 518 Resistance: 0...150 Ω 0...500 Ω 0...1000 Ω 0...3000 Ω
Resolution, max	15 bits plus sign (Bipolar) 16 bits (Unipolar)
Input impedance	Voltage: 10 MΩ Current: 250 Ω
Converter type	Sigma-Delta
Cyclic update time	11...5000 ms dependent on user configuration
Rated working voltage	30V AC/30V DC
Common mode voltage	±10V DC per channel
Common mode rejection ratio, min	115 dB at 50 Hz at 10V 115 dB at 60 Hz at 10V
Normal mode rejection ratio, min	85 dB at 50 Hz at 1.5V 85 dB at 60 Hz at 1.5V

Embedded Analog Input Specifications - CompactLogix 5370 L2 Controllers

Attribute	1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK, 1769-L27ERM-QBFC1B
Accuracy, overall at 25 °C (77 °F) ⁽²⁾	Thermocouple types: - J at -210...+1200 °C (-328...+2192 °F): ±0.6 °C (1.1 °F) - N at -110...+1300 °C (-166...+2372 °F): ±1.0 °C (1.8 °F) - N at -200...-110 °C (-328...-166 °F): ±1.0 °C (1.8 °F) - T at -170...+400 °C (-274...+752 °F): ±1.0 °C (1.8 °F) - T at -200...-170 °C (-328...-274 °F): ±1.0 °C (1.8 °F) - K at 1370...1372 °C (2498...2501.6 °F): ±1.2 °C (2.2 °F) - K at -200...+1370 °C (-328...+2498 °F): ±1.0 °C (1.8 °F) - E at -200...+1000 °C (-328...+1832 °F): ±0.5 °C (0.9 °F) - S and R at 0...1768 °C (32...3214.4 °F): ±1.7 °C (3.1 °F) - S and R at -50...0 °C (-58...+32 °F): ±4.0 °C (7.2 °F) - B at 300...1820 °C (572...3308 °F): ±3.0 °C (5.4 °F) - B at 250...300 °C (482...572 °F): ±6.0 °C (10.8 °F) - C at 0...2315 °C (32...4199 °F): ±1.8 °C (3.2 °F) Voltage inputs: ±50 mV: ±15 μV ±100 mV: ±20 μV 0...5V: ±2.5 mV 1...5V: ±2 mV 0...10V: ±5 mV ±10V: ±10 mV Current inputs: 0...20 mA: ±20 μA 4...20 mA: ±16 μA RTD types: - Platinum 385: ±0.5 °C (0.9 °F) - Platinum 3916: ±0.4 °C (0.7 °F) - Nickel: ±0.2 °C (0.4 °F) - Nickel-Iron: ±0.3 °C (0.5 °F) - Copper: ±0.6 °C (1.1 °F) Resistance types: 0...150 Ω: ±0.15 Ω 0...500 Ω: ±0.5 Ω 0...1000 Ω: ±1.0 Ω 0...3000 Ω: ±1.5 Ω
Accuracy, overall at 0...60 °C (32...140 °F) ⁽²⁾	Thermocouple types: - J at -210...+1200 °C (-328...+2192 °F): ±0.9 °C (1.6 °F) - N at -110...+1300 °C (-166...+2372 °F): ±1.5 °C (2.7 °F) - N at -200...-110 °C (-328...-166 °F): ±1.5 °C (2.7 °F) - T at -170...+400 °C (-274...+752 °F): ±1.5 °C (2.7 °F) - T at -200...-170 °C (-328...-274 °F): ±1.5 °C (2.7 °F) - K at 1370...1372 °C (2498...2501.6 °F): ±1.8 °C (3.2 °F) - K at -200...+1370 °C (-328...+2498 °F): ±1.5 °C (2.7 °F) - E at -200...+1000 °C (-328...+1832 °F): ±0.8 °C (1.4 °F) - S and R at 0...1768 °C (32...3214.4 °F): ±3.5 °C (6.3 °F) - S and R at -50...0 °C (-58...+32 °F): ±4.0 °C (7.2 °F) - B at 300...1820 °C (572...3308 °F): ±4.5 °C (8.1 °F) - B at 250...300 °C (482...572 °F): ±9.0 °C (16.2 °F) - C at 0...2315 °C (32...4199 °F): ±3.5 °C (6.3 °F) Voltage inputs: ±50 mV: ±25 μV ±100 mV: ±30 μV 0...5V: ±5 mV 1...5V: ±4 mV 0...10V: ±10 mV ±10V: ±20 mV Current inputs: 0...20 mA: ±50 μA 4...20 mA: ±40 μA RTD types: - Platinum 385: ±0.9 °C (1.6 °F) - Platinum 3916: ±0.8 °C (1.4 °F) - Nickel: ±0.4 °C (0.7 °F) - Nickel-Iron: ±0.5 °C (0.9 °F) - Copper: ±1.1 °C (2.0 °F) Resistance types:⁽²⁾ 0...150 Ω: ±0.25 Ω 0...500 Ω: ±0.8 Ω 0...1000 Ω: ±1.5 Ω 0...3000 Ω: ±2.5 Ω

Embedded Analog Input Specifications - CompactLogix 5370 L2 Controllers

Attribute	1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK, 1769-L27ERM-QBFC1B
Cold junction compensation accuracy at 0...60 °C (32...140 °F) ⁽²⁾	±1.3 °C (34.34 °F)
Calibration	Cyclic calibration by user configuration
Non-linearity (in percent full-scale)	±0.05%
Repeatability at 25 °C (77 °F) with 10 Hz filter	Thermocouple types: • J at -210...+1200 °C (-328...+2192 °F): ±0.1 °C (0.2 °F) • N at -110...+1300 °C (-166...+2372 °F): ±0.1 °C (0.2 °F) • N at -200...+110 °C (-328...+166 °F): ±0.25 °C (0.5 °F) • T at -170...+400 °C (-274...+752 °F): ±0.1 °C (0.2 °F) • T at -200...+170 °C (-328...+274 °F): ±1.5 °C (2.7 °F) • K at 1370...+1372 °C (2498...+2501.6 °F): ±0.15 °C (0.3 °F) • K at -170...+1370 °C (-274...+2498 °F): ±0.1 °C (0.2 °F) • K at -200...+170 °C (-328...+274 °F): ±2.0 °C (3.6 °F) • E at -200...+1000 °C (-328...+1832 °F): ±0.1 °C (0.2 °F) • S and R at 0...+1768 °C (32...+3214.4 °F): ±0.4 °C (0.7 °F) • S and R at -50...+0 °C (-58...+32 °F): ±1.0 °C (1.8 °F) • B at 300...+1820 °C (572...+3308 °F): ±0.7 °C (1.3 °F) • B at 250...+300 °C (482...+572 °F): ±1.5 °C (2.7 °F) • C at 0...+2315 °C (32...+4199 °F): ±0.2 °C (0.4 °F) Voltage inputs: • ±50 mV: ±6 µA • ±100 mV: ±6 µV • 0...5V: ±150 mV • 1...5V: ±150 mV • 0...10V: ±150 mV • ±10V: ±150 mV Current inputs: • 0...20 mA: ±0.3 µA • 4...20 mA: ±0.3 µA RTD types: • Platinum 385: ±0.2 °C (0.4 °F) • Platinum 3916: ±0.2 °C (0.4 °F) • Nickel: ±0.01 °C (0.02 °F) • Nickel-Iron: ±0.01 °C (0.02 °F) • Copper: ±0.2 °C (0.4 °F) Resistance types: • 0...150 Ω: ±0.04 Ω • 0...500 Ω: ±0.2 Ω • 0...1000 Ω: ±0.2 Ω • 0...3000 Ω: ±0.2 Ω
Overload at input terminals, max	Voltage: ±35V DC continuous Current: 32 mA continuous, ±7.6V DC
Channel diagnostics	Invalid configuration, Over-, or underrange by bit reporting, open circuit
Isolation voltage	30V AC/30V DC (continuous), reinforced insulation type Type tested at 720V DC for 60 s; inputs to system backplane

(1) Values for these input types rated at the following ambient temperatures: 40 °C (104 °F), 55 °C (131 °F), 60 °C (140 °F).

(2) These specification values are based on cyclic calibration and a 4-wire device that is connected to the module.

Embedded Analog Output Specifications - CompactLogix 5370 L2 Controllers

Attribute	1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK, 1769-L27ERM-QBFC1B
Outputs	2 single-ended
Output types	• Voltage • Current
Output ranges ⁽¹⁾	Voltage: • 0...5V • 1...5V • 0...10V • -10V...+10V Current: • 0...20 mA • 4...20 mA
Converter type	R-2R Ladder Voltage Switching
Resolution, max	15 bits plus sign (Bipolar) 16 bits (Unipolar)
Cyclic update time, nom	2.5 ms
Cyclic update time, max	9.5 ms
Current load on voltage output	10 mA max
Resistive load on current output	0...300 Ω
Load range on voltage output	> 1 kΩ at 10V DC
Inductive load, max (current outputs)	0.1 mH
Capacitive load, max (Voltage Outputs)	1 µF
Accuracy, overall at 25 °C (77 °F)	Voltage: ±0.5% full-scale Current: ±0.5% full-scale
Accuracy, overall at 0...60 °C (32...140 °F)	Voltage: ±0.8% full-scale Current: ±0.8% full-scale
Accuracy drift with temperature	Voltage: ±0.0086% full-scale per °C Current: ±0.0086% full-scale per °C
Output ripple range 0...50 kHz (referred to output range)	±0.05%
Non-linearity	±0.05% (in percent full-scale)
Repeatability	± 0.05%
Output impedance	Voltage: <1 Ω Current: >1 MΩ
Short circuit protection	Yes
Short circuit, nom	Current: 16 mA
Open circuit, max	16V
Output response at system power-up and powerdown	Current: ± 1.0V spike for < 5 ms Voltage: ± 1.0V DC spike < 5 ms
Isolation voltage	30V AC/30V DC (continuous), reinforced insulation type Type tested at 500V AC or 710V DC for 60 s; outputs to system backplane

(1) Values for these input types rated at the following ambient temperatures: 40 °C (104 °F), 55 °C (131 °F), 60 °C (140 °F).

Analog Input Ranges - CompactLogix 5370 L2 Controllers

Input Type Normal Op. Range	Full Range ⁽¹⁾	Raw/Prop. Data Units for Full Range	Eng. Unit Values for Full Range x 1		Eng. Unit Values for Full Range x 10		Scaled-for- PID Values for Normal Operating Range	Scaled-for-PID Values for Full Range	Percent of Normal Op. Range Values	Percent of Full Range Values	
			°C	°F	°C	°F					
-10...+10V DC	-10.5V...+10.5V	-32767... +32767	-10500...+10500		-1050...+1050		0...16,383	-410...+16793	-10000... +10000	-10500...+10500	
0...5V DC	-0.5V...+5.25V		-500...+5250		-50...+525			-1638...+17202		-1000...+10500	
0...10V DC	-0.5V...+10.5V		-500...+10500		-50...+1050			-819...+17202		-500...+10500	
4...20 mA	3.2...21 mA		3200...21000		320...2100			-819...+17407		-500...+10625	
1...5V DC	0.5V...5.25V		500...5250		50...525			-2048...+17407		-1250...+10625	
0...20 mA	0...21 mA		0...21000		0...2100			0...17202		0...10500	
J (-210...+1200)			-2100...+12000	-3460...+21920	-210...+1200	-346...+2192		0...16,383	0...16,383	0...10000	0...10000
K (-200...+1372)			-2000...+13720	-3280...+25020	-200...+1372	-328...+2502					
T (-200...+400)			-2000...+4000	-3280...+7520	-200...+400	-328...+752					
E (-200...+1000)			-2000...+10000	-3280...+18320	-200...+1000	-328...+1832					
R (-50...+1768)			-500...+17680	-580...+32140	-50...+1768	-58...+3214					
S (-50...+1768)			-500...+17680	-580...+32140	-50...+1768	-58...+3214					
B (250...1820)			2500...18200	4820...32767	250...1820	482...3308					
N (-200...+1300)			-2000...+13000	-3280...+23720	-200...+1300	-328...+2372					
C (0...2315)			0...23150	320...32767	0...2315	32...4199					
-50...+50 mV			-5000...+5000		-500...+500			0...16,383			
-100...+100 mV			-10000...+10000		-1000...+1000						
0...150 Ω			0...15000		0...1500						
0...500 Ω			0...5000		0...500						
0...1000 Ω			0...10000		0...1000						
0...3000 Ω			0...30000		0...3000						
Platinum 385 (-200...+850)			-2000...+8500	-3280...+15620	-200...+850	-328...+1562					
Platinum 3916 (-200...+510)			-2000...+5100	-3280...+9500	-200...+510	-328...+950					
Copper 426 (-70...+150)			-700...+1500	-940...+3020	-70...+1500	-94...+302					
Nickel 618 (-60...+250)			-600...+2500	-760...+4820	-60...+250	-76...+482					
Nickel 672 (-80...+260)			-800...+2600	-1120...+5000	-80...+260	-112...+500					
Nickel-Iron 518 (-100...+200)			-1000...+2000	-1480...+3920	-100...+200	-148...+392					

(1) Includes amount over and under normal operating.

Embedded Analog Output Module Data⁽¹⁾ - CompactLogix 5370 L2 Controllers

Analog Output Module Range	Input Value	Example Data		Output Range State	Raw/Proportional Data		Engineering Unit		Scaled-for-PID		Percent Full Range	
		Controller Ordered	Embedded Analog Module Output		Decimal Range		Decimal Range		Decimal Range		Decimal Range	
					Controller Ordered	Embedded Analog Module Output	Controller Ordered	Embedded Analog Module Output	Controller Ordered	Embedded Analog Module Output	Controller Ordered	Embedded Analog Module Output
±10V	Over 10.5V	+11.0V	+10.5V	Over	-	-	11000	-	17202	-	11000	-
	+10.5V	+10.5V	+10.5V	Over	32767	32767	10500	10500	16793	16793	10500	10500
	±10V	+10.0V	+10.0V	Normal	31207	31207	10000	10000	16383	16383	10000	10000
		0.0V	0.0V	Normal	0	0	0	0	8192	8192	0	0
		-10.0V	-10.0V	Normal	-31207	-31207	-10000	-10000	0	0	-10000	-10000
	-10.5V	-10.5V	-10.5V	Under	-32767	-32767	-10500	-10500	-410	-410	-10500	-10500
Under 10.5V	-11.0V	-10.5V	Under	-	-	-11000	-10500	-819	-410	-11000	-10500	
0...5V	Over 5.25V	5.5V	+5.25V	Over	-	-	5500	5250	18021	17202	11000	10500
	5.25V	5.25V	+5.25V	Over	32767	32767	5250	5250	17202	17202	10500	10500
	0...5.0V	5.0V	+5.0V	Normal	31207	31207	5000	5000	16383	16383	10000	10000
		0.0V	0.0V	Normal	0	0	0	0	0	0	0	0
	-0.5V	-0.5V	-0.5V	Under	-3121	-3121	-500	-500	-1638	-1638	-1000	-1000
	Under -0.5V	-1.0V	-0.5V	Under	-6241	-3121	-500	-500	-3277	-1638	-2000	-1000
0...10V	Over 10.5V	11.0V	+10.5V	Over	-	-	11000	10500	18021	17202	11000	10500
	+10.5V	+10.5V	+10.5V	Over	32767	32767	10500	10500	17202	17202	10500	10500
	0...10.0V	+10.0V	+10.0V	Normal	31207	31207	10000	10000	16383	16383	10000	10000
		0.0V	0.0V	Normal	0	0	0	0	0	0	0	0
	-0.5V	-0.5V	-0.5V	Under	-1560	-1560	-500	-500	-819	-819	-500	-500
	Under -5.0V	-1.0V	-0.5V	Under	-3121	-1560	-1000	-500	-1638	-819	-1000	-500
4...20 mA	Over 21.0 mA	+22.0 mA	21 mA	Over	-	-	22000	21000	18431	17407	11250	10625
	21.0 mA	+21.0 mA	21 mA	Over	32767	32767	21000	21000	17407	17407	10625	10625
	4...20.0 mA	+20.0 mA	20 mA	Normal	31207	31207	20000	20000	16383	16383	10000	10000
		+4.0 mA	+4.0 mA	Normal	6241	6241	4000	4000	0	0	0	0
	3.2 mA	+3.2 mA	+3.2 mA	Under	4993	4993	3200	3200	-819	-819	-500	-500
	Under 3.2	0.0 mA	+3.2 mA	Under	0	4993	0	3200	-4096	-819	-2500	-500
1...5V	Over 5.25V	+5.5V	+5.25V	Over	-	-	5500	5250	18431	17407	11250	10625
	+5.25V	+5.25V	+5.25V	Over	32767	32767	5250	5250	17407	17407	10625	10625
	1...5.0V	+5.0V	+5.0V	Normal	31207	31207	5000	5000	16383	16383	10000	10000
		+1.0V	+1.0V	Normal	6241	6241	1000	1000	0	0	0	0
	0.5V	+0.5V	+0.5V	Under	3121	3121	500	500	-2048	-2048	-1250	-1250
	Under 0.5V	0.0V	0.0V	Under	0	3121	0	500	-4096	-2048	-2500	-1250
0...20 mA	Over 21.0 mA	+22.0 mA	21 mA	Over	-	-	22000	21000	18201	17202	11000	10500
	21.0 mA	21.0 mA	21 mA	Over	32767	32767	21000	21000	17202	17202	10500	10500
	0...20.0 mA	20.0 mA	20 mA	Normal	31207	31207	20000	20000	16383	16383	10000	10000
		0.0 mA	0.0 mA	Normal	0	0	0	0	0	0	0	0
	Under 0.0 mA	-1.0 mA	0.0 mA	Under	-1560	0	0	-1000	-819	0	-500	0

(1) If Clamping is enabled, the output value is the clamped value that is defined in the configuration.


Embedded HSC Module Specifications - CompactLogix 5370 L2 Controllers

Attribute	1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK 1769-L27ERM-QBFC1B
Input Specifications	
Input frequency, max	250 kHz
Input current, max	15 mA per channel
Input current, min	6.8 mA
Input voltage range	2.6...30V DC ⁽¹⁾
On-state voltage, max	30V DC
On-state current, min	6.8 mA
Off-state voltage, max	1.0V DC
Off-state current, max	1.5 mA
Off-state leakage current, max	1.5 mA
Input impedance, nom	1950 Ω
Pulse width, min	2.5 μ s
Phase separation, min	1.3 μ s
Isolation voltage	75V (continuous), reinforced insulation type Type tested at 1200V AC for 60 s; inputs to system backplane and input to input
Output Specifications	
Output voltage range	5...30V DC
On-state voltage, max	User power - 0.1V DC
On-state output current, max	0.25 A per channel
On-state output current, min	1 mA
On-state voltage drop, max	0.5V DC
Off-state leakage current, max	5 μ A
Turn-on time, max	400 μ s
Turn-off time, max	200 μ s
Reverse polarity protection	30V DC
Isolation voltage	75V (continuous), reinforced insulation type Type tested at 1200V AC for 60 s; inputs to system backplane and input to input
Current per channel, max	1.0 A @ 40 °C (104 °F) 0.5 A @ 55 °C (131 °F) 0.25 A @ 60 °C (140 °F)
Current per module, max	4.0 A @ 40 °C (104 °F) 2.0 A @ 55 °C (131 °F) 1.0 A @ 60 °C (140 °F)

(1) See [Maximum Input Voltage - 24V DC Operation](#) temperature derating.

Embedded HSC Module Temperature Derating


Maximum Input Voltage - 24V DC Operation

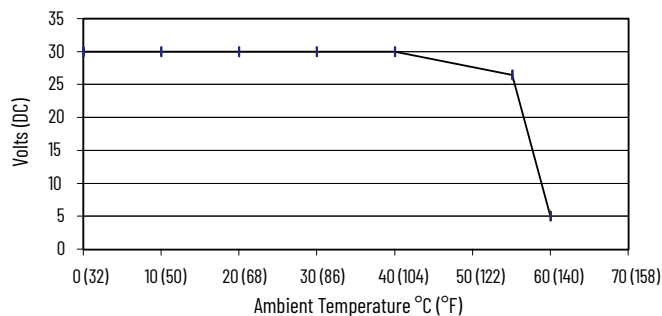

Temperature	Derated Voltage ⁽¹⁾
40 °C (104 °F)	30V DC
55 °C (131 °F)	26.4V DC
60 °C (140 °F)	5V DC


(1) You achieve an input voltage derating of 55...60 °C (131...140 °F) by using a dropping resistor.
For 24V DC input voltage, use a 2.4 k Ω , 1/2 W resistor.
For input voltages other than 24V DC, use a 1/2 W resistor with value: $125 \times (V_{in} - 5V)$.

Maximum Output Voltage - 24V DC Operation

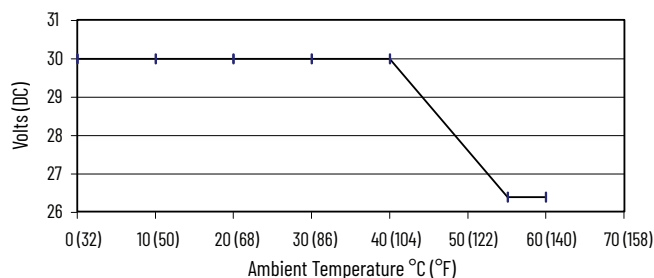


Temperature	Derated Voltage
40 °C (104 °F)	30V DC
55...60 °C (131...140 °F)	26.4V DC

Maximum Input Current Per Point - 5V DC Operation

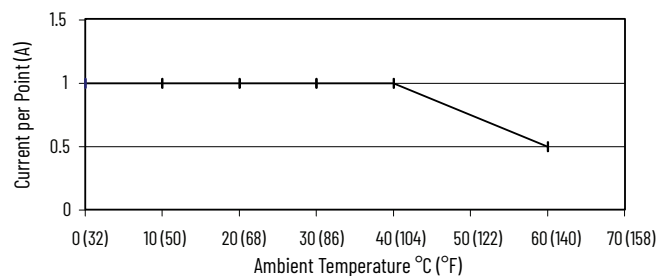


Temperature	Derated Current
0...40 °C (32...104 °F)	1 A
60 °C (140 °F)	0.5 A

Maximum Output Current Per Point - 5V DC Operation

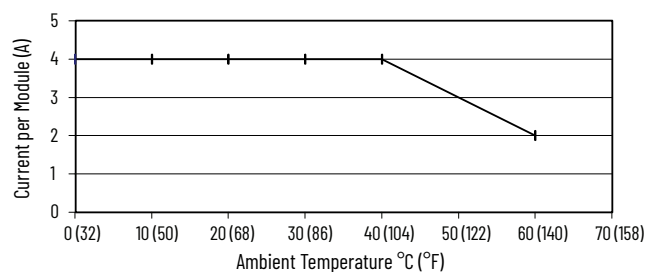


Temperature	Derated Current
0...40 °C (32...104 °F)	4 A
60 °C (140 °F)	2 A

Maximum Output Current Per Point - 24V DC Operation

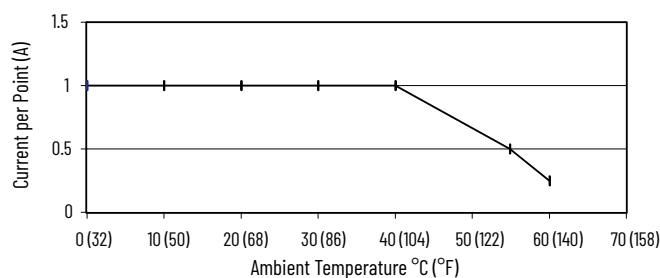

Temperature	Derated Current
0...40 °C (32...104 °F)	1 A
55 °C (131 °F)	0.5 A
60 °C (140 °F)	0.25 A

Maximum Output Current Per Module - 24V DC Operation

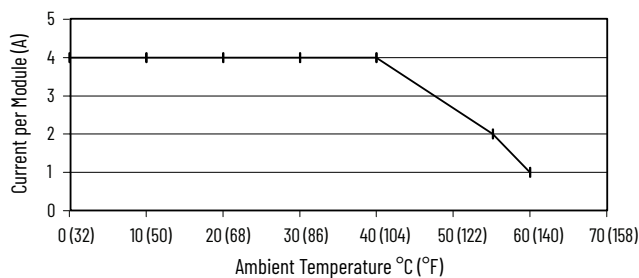

Temperature	Derated Current
40 °C (104 °F)	4 A
55 °C (131 °F)	2 A
60 °C (140 °F)	1 A

Embedded Power Supply Specifications - CompactLogix 5370 L2 Controllers

Attribute	1769-L24ER-QB1B	1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK, 1769-L27ERM-QBFC1B
Input voltage range	19.2...31.2V DC	
Input voltage, nom	24V DC	
Line requirement, max ⁽¹⁾	2.1 A @ 24V DC, Class 2/SELV	
Available 5V DC bus current	1.54 A	1.0 A
Available 24V DC bus current	0.95 A	0.8 A
Inrush, max	< 30 A @ 19.2...31.2V DC	
Line loss ride-through	10 ms...10 s	
Short circuit protection	Internal fuse Not replaceable	
Overvoltage protection	Yes	
Isolation voltage	30V AC/30V DC (continuous), reinforced insulation type Type tested at 500V AC or 710V DC for 60 s; outputs to system backplane	

(1) Value rated at the following ambient temperatures: 40 °C (104 °F), 55 °C (131 °F), 60 °C (140 °F).

I/O Module Support - CompactLogix 5370 L3 and Compact GuardLogix 5370 Controllers


The CompactLogix 5370 L3 controllers offer local expansion modules that are installed across up to three banks of modules. You must use 1769 Compact I/O modules with these controllers.

Remember the following when using I/O modules with the CompactLogix 5370 L3 and Compact GuardLogix 5370 controllers:

- The controller must be the leftmost module in the local bank of the system.
- The number of I/O modules that are supported in a controller system varies by controller catalog number.

Cat. No.	Local 1769 Compact I/O Modules Supported, Max
1769-L30ER, 1769-L30ERK 1769-L30ER-NSE 1769-L30ERM, 1769-L30ERMK 1769-L30ERMS	8
1769-L33ER, 1769-L33ERK 1769-L33ERM, 1769-L33ERMK 1769-L33ERM, 1769-L33ERMSK	16
1769-L36ERM 1769-L36ERMS 1769-L37ERM, 1769-L37ERMK 1768-L37ERMS, 1768-L37ERMSK 1769-L38ERM, 1769-L38ERMK 1769-L38ERMS, 1769-L38ERMSK	30

- You can install I/O modules in as many as three banks, that is, the local bank and two additional banks.
- You can install as many as three I/O modules between the controller and power supply.
- You can install as many as eight I/O modules to the right of the power supply in the local bank.
- You can install as many as eight I/O modules on both the left and right sides of the power supply in additional banks.
- You must consider the distance rating and current draw of the controller and all I/O modules when designing your system.
- Systems with multiple banks can be installed vertically or horizontally.
- You must use expansion cables to connect banks in multi-bank systems.
- You must use an end cap at the end of the last bank in a system.

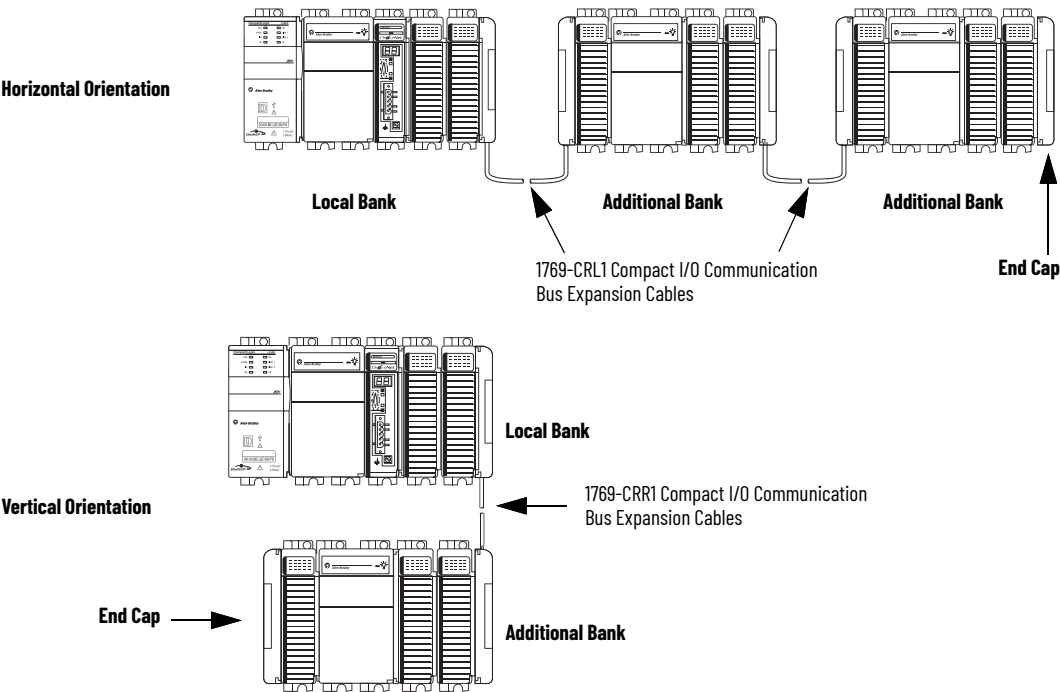

Local I/O Performance of CompactLogix 5370 L3 Controllers

The requested packet interval (RPI) defines the frequency at which the controller sends data to and receives data from I/O modules. In the programming software, you set an RPI rate for each I/O module in your system.

The CompactLogix 5370 L3 controllers always attempt to scan an I/O module at the configured RPI rate. An I/O Task Overlap minor fault occurs if there isn't enough system bandwidth. This fault occurs if other, higher priority tasks help prevent the 1769 Compact I/O subsystem from completing before the next scheduled time for it to run again, which consumes system bandwidth. Higher priority tasks that help prevent the 1769 Compact I/O subsystem task from completing before the next scheduled time for it to run again use up system bandwidth.

For individual I/O modules, a Module RPI Overlap minor fault occurs if there is at least one I/O module that can't be serviced within its RPI time.

The specific configuration parameters for a system determine the impact on actual RPI rates. These configuration factors can impact the effective scan frequency for any individual module:

- Rates at which the RPI rates of other 1769 Compact I/O are set
- Number of other 1769 Compact I/O modules in the system
- Types of other 1769 Compact I/O modules in the system
- Application user task priorities


RPI Rate Guidelines

Type of Module	Guidelines
1769 Compact I/O digital and analog (any mix) modules	The following guidelines apply: • 1...2 modules can be scanned in 0.5 ms. • 3...4 modules can be scanned in 1 ms. • 5...30 modules can be scanned in 2 ms. • Some input modules have a fixed 8 ms filter, so selection of a faster RPI has no effect.
1769 Compact I/O specialty modules	The following conditions apply: • For every full-sized 1769-SDN module in the system, increase the RPI of every other module by 2 ms. • For every 1769-HSC module in the system, increase the RPI of every other module by 1 ms. • For every full-sized 1769-ASCII module system, increase the RPI of every other module by 1 ms. For every 1769-SM2 module in the system, increase the RPI of the other module by 2 ms. For example, the system includes four I/O modules that are configured with an RPI = 1 ms and you add a 1769-SDN module to the system. You must increase the RPI value for all four I/O modules by 2 ms. Therefore, when the 1769-SDN module is added to the system, the four I/O modules use an RPI = 3 ms. If, in the same system, you add a second 1769-SDN module, the RPI value of the four digital I/O modules is increased to 5 ms.


You can set individual RPI values of the 1769 Compact I/O module higher than these values. For example, if your application scans one or two modules, you do not have to use RPI values = 0.5 ms. You can set the RPI to a higher value, such as 1.0 ms, if necessary. Remember, higher RPI values result in scanning the data less frequently.

The RPI is asynchronous to the program scan. Other factors, such as program execution duration, affect I/O throughput.


Minimum Spacing Requirements - CompactLogix 5370 Controllers and Compact GuardLogix 5370 Controllers

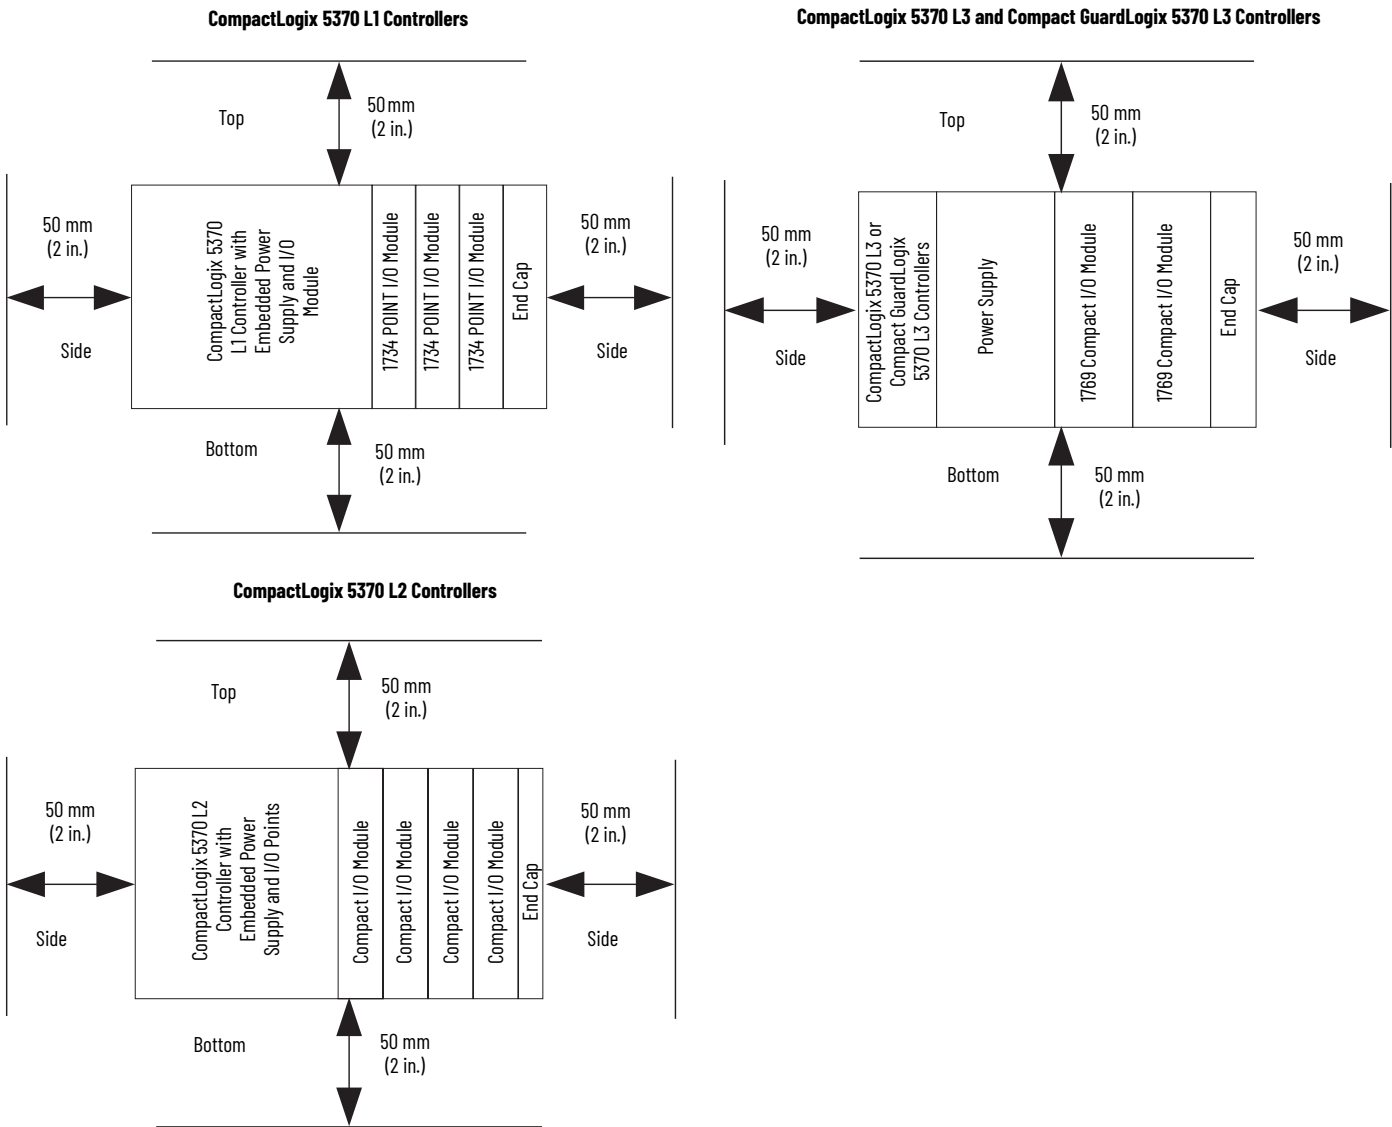


Dimensions - CompactLogix 5370 L1 Controllers

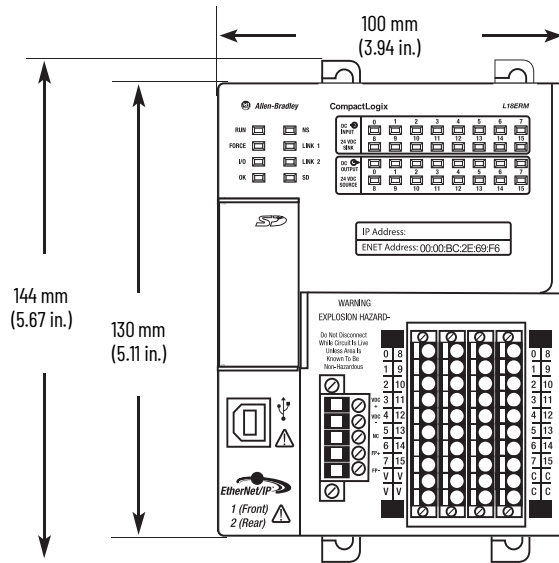



Side View

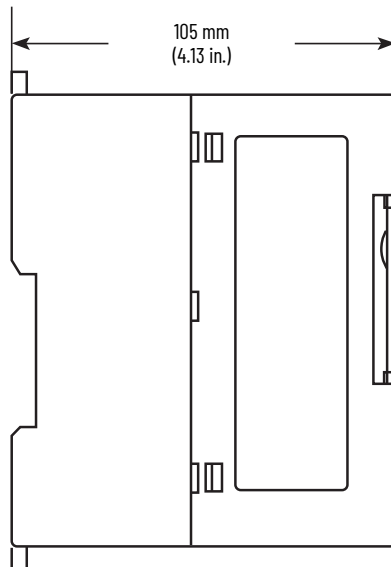


Dimensions - CompactLogix 5370 L2 Controllers

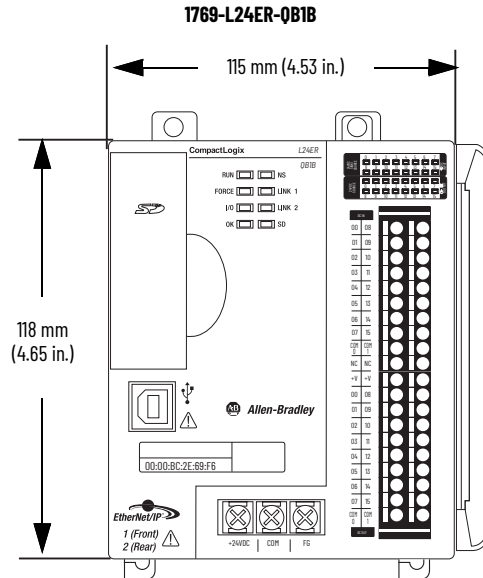


1769-L24ER-Q8FC1B, 1769-L24ER-Q8FC1BK, 1769-L27ERM-Q8FC1B

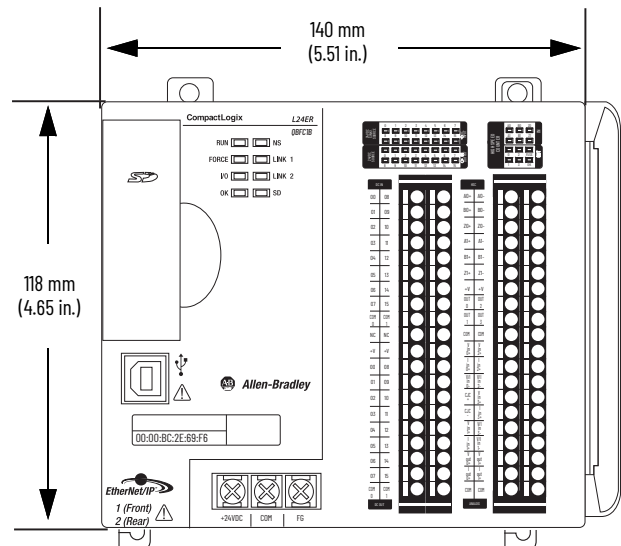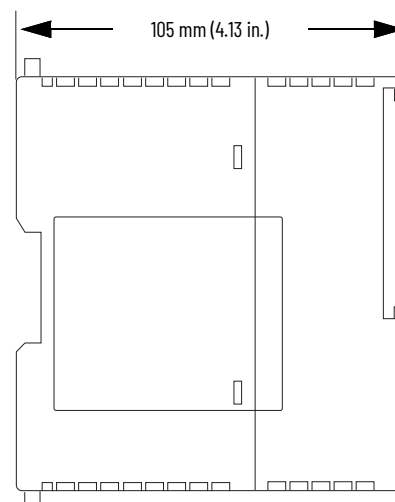All CompactLogix 5370 L2 Controllers
Side View


Dimensions - CompactLogix 5370 L3 Controllers

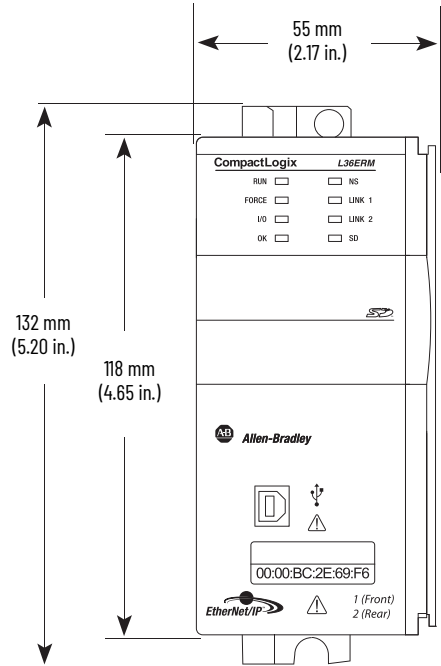


Side View

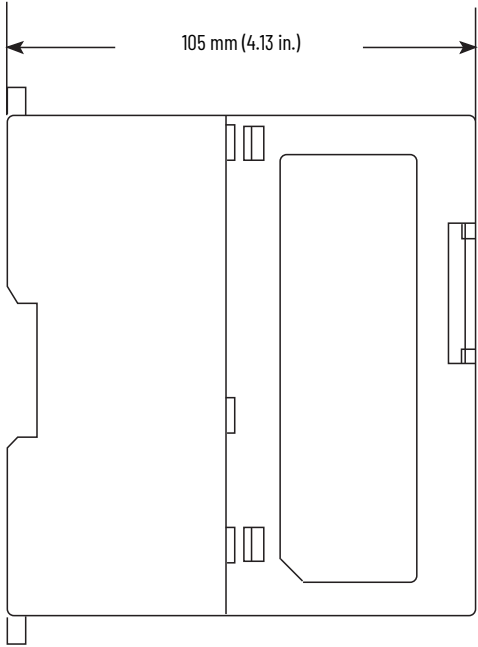

Dimensions - Compact GuardLogix 5370 Controllers Dimensions

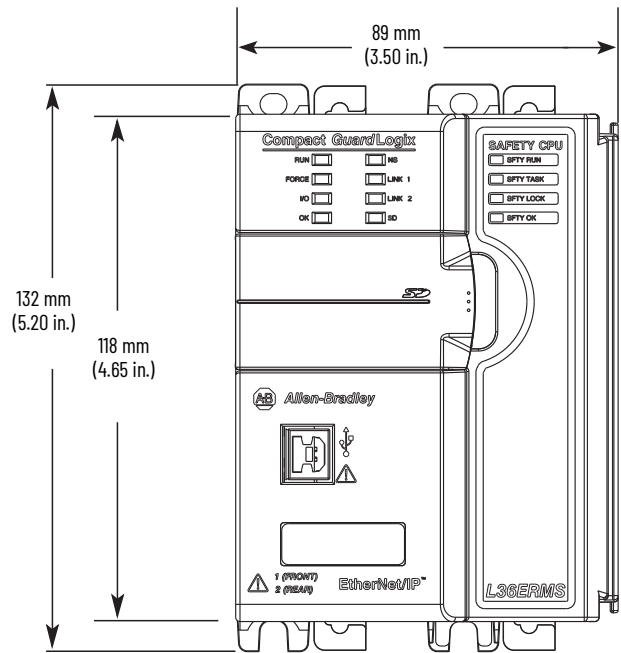

Side View

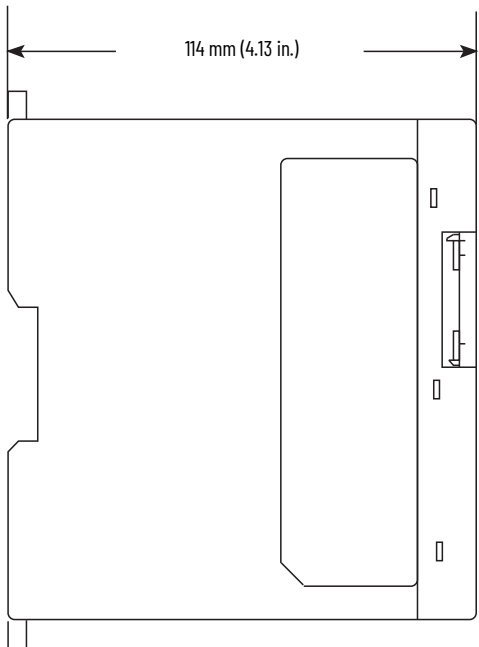


Armor CompactLogix and Armor Compact GuardLogix Controllers

Armor CompactLogix



Armor Compact GuardLogix

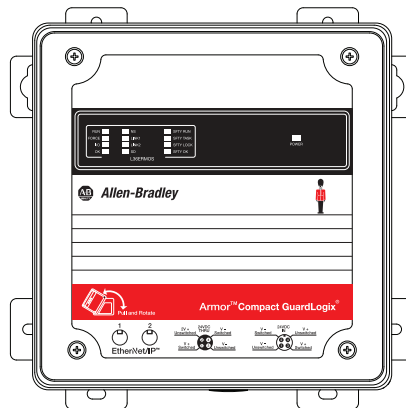

The Armor CompactLogix and Armor Compact GuardLogix controllers extend the CompactLogix platform to the On-Machine™ space, this puts industrial control closer to the application and sometimes onto the machine itself. The safety controllers provide standard and safety memory. The memory that each catalog number supports is listed in the Technical Specifications table on [page 27](#). The controllers also support two independent Ethernet ports to connect to an EtherNet/IP network.

This safety controller supports the full temperature range as CompactLogix controllers, while offering global certifications and ratings for IP67 dust and water protection. It's certified for use in safety applications up to and including safety integrity level (SIL) 3 and Performance Level (e) in which the de-energized state is the safe state. With so many hardware functions in one device, the Armor CompactLogix and Armor Compact GuardLogix controllers provide the following benefits:

- Minimized cabinet hardware
- Simplified wiring layouts
- No required tools or specialty personnel for component replacement
- Improve Mean Time to Restoration (MTTR)
- Simplified troubleshooting
- Readily available system status without the need to open a cabinet or visit a control room

The Armor CompactLogix and Armor Compact GuardLogix controllers provide memory capacity for the most demanding applications. In some applications, for example, when you use these controllers on a Device Level Ring (DLR) network, resiliency is provided from the loss of one network connection and you can replacement devices while production is in progress.

Similar to the Compact GuardLogix controllers, the Armor Compact GuardLogix controllers offer the standard features of a CompactLogix controller and safety features. One difference is that the Armor Compact GuardLogix controllers can use I/O modules that are on-machine and are accessible over an EtherNet/IP network.

Features - Armor CompactLogix and Armor Compact GuardLogix Controllers

Feature	1769-L33ERMO 1769-L36ERMO 1769-L37ERMO 1769-L38ERMO	1769-L33ERMOS 1769-L36ERMOS 1769-L37ERMOS 1769-L38ERMOS
Controller tasks Continuous Periodic	32 tasks 100 programs/task	
Built-in communication ports	• Two Ethernet ports - CompactLogix 5370 controllers have two Ethernet ports. The ports carry the same network traffic as part of the embedded switch of the controller. However, the controller uses only one IP address. • One USB port (only for temporary connection)	
Communication options	EtherNet/IP	
EtherNet/IP node, max	• 1769-L33ERMO, 1769-L33ERMOS: Up to 32 nodes • 1769-L36ERMO, 1769-L36ERMOS: Up to 48 nodes • 1769-L37ERMO, 1769-L37ERMOS: Up to 64 nodes • 1769-L38ERMO, 1769-L38ERMOS: Up to 80 nodes	
Controller connections	256	
Sockets, max	32	
Integrated Motion over an EtherNet/IP network	• 1769-L33ERMO, 1769-L33ERMOS: As many as 8 axes • 1769-L36ERMO, 1769-L36ERMOS: As many as 16 axes • 1769-L37ERMO, 1769-L37ERMOS: As many as 16 axes • 1769-L38ERMO, 1769-L38ERMOS: As many as 16 axes	
Programming languages	• Relay ladder⁽¹⁾ • Structured Text • Function block • SFC	
Integrated safety	—	Yes

(1) The Armor Compact GuardLogix controllers support only the relay ladder programming language in the safety task. The Armor Compact GuardLogix controllers support all listed programming languages in the standard task.

Certifications - Armor CompactLogix and Armor Compact GuardLogix Controllers

Certification ⁽¹⁾	1769-L33ERMO 1769-L36ERMO 1769-L37ERMO 1769-L38ERMO	1769-L33ERMOS 1769-L36ERMOS 1769-L37ERMOS 1769-L38ERMOS
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584.	
UKCA and CE	UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with: EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) EN 61326-3-1; Meas./Control/Lab., Immunity Requirements for safety systems and functions EN 61000-6-4; Industrial Emissions EN 61000-6-2; Industrial Immunity	UK Statutory Instrument 2016 No. 1091 and European Union 2014/30/EU EMC Directive, compliant with: EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) EN 61326-3-1; Meas./Control/Lab., Immunity Requirements for safety systems and functions EN 61000-6-4; Industrial Emissions EN 61000-6-2; Industrial Immunity
		UK Statutory Instrument 2008 No. 1597 and European Union 2006/42/EC MD Directive, compliant with: EN 61508-1...7; General requirements EN ISO 13849-1; Safety-related parts of control systems EN 62061; Functional safety of safety-related control systems
	UK Statutory Instrument 2012 No. 3032 and European Union 2011/65/EU RoHS Directive, compliant with: EN IEC 63000; Technical documentation	
RCM	Australian Radiocommunications Act, compliant with: EN 61000-6-4; Industrial Emissions	
TÜV certified for Functional Safety ⁽²⁾	-	Capable of Cat. 4/PL e according to EN ISO 13849-1 and SIL 3 according to EN 62061/IEC 61508
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3	
Morocco	Arrêté ministériel n° 6404-15 du 29 ramadan 1436	

- (1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.
(2) When used with specified firmware revisions.

Environmental Specifications - Armor CompactLogix and Armor Compact GuardLogix Controllers



Feature	1769-L33ERMO, 1769-L33ERMOS 1769-L36ERMO, 1769-L36ERMOS 1769-L37ERMO, 1769-L37ERMOS 1769-L38ERMO, 1769-L38ERMOS
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold) IEC 60068-2-2 (Test Bd, Operating Dry Heat) IEC 60068-2-14 (Test Na, Operating Thermal Shock)	0 °C < Ta < 60 °C (32 °F < Ta < 140 °F)
Temperature, ambient, max	60 °C (140 °F)
Temperature, nonoperating IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold) IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat) IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Emissions	IEC 61000-6-4
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine wave 80% AM from 80...6000 MHz
EFT/B immunity IEC 61000-4-4	±3 kV at 5/100 kHz on power ports ±3 kV at 5/100 kHz on Ethernet ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ± 2 kV line-earth (CM) on power ports ±2 kV line-earth (CM) on Ethernet ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz

Technical Specifications - Armor CompactLogix and Armor Compact GuardLogix Controller





Attribute	1769-L33ERMO 1769-L36ERMO 1769-L37ERMO 1769-L38ERMO	1769-L33ERMOS 1769-L36ERMOS 1769-L37ERMOS 1769-L38ERMOS
User memory	1769-L33ERMO: 2 MB 1769-L36ERMO: 3 MB 1769-L37ERMO: 4 MB 1769-L38ERMO: 5 MB	1769-L33ERMOS: 2 MB standard + 1 MB safety 1769-L36ERMOS: 3 MB standard + 1.5 MB safety 1769-L37ERMOS: 4 MB standard + 1.5 MB safety 1769-L38ERMOS: 5 MB + 1.5 MB safety
Optional nonvolatile memory	1784-SD1 card with 1 Gb of available memory (shipped with controller) 1784-SD2 card with 2 Gb of available memory (available for separate ordering)	
Voltage and current ratings	IN (Pins 2, 3) 18...32V DC, 8 A SELV IN (Pins 1, 4) 18...32V DC, 8 A SELV Out (Pins 1, 4) 18...32V DC, 8 A Out (Pins 2, 3) 18...32V DC, 6 A	
Power dissipation, max	7.5 W	
Power consumption, max	50VA @ 24V DC	
Isolation voltage	30V (continuous), Basic Insulation Type, Power to enclosure, Ethernet channels to Power, and non-redundant Ethernet channels to non-redundant Ethernet channels. No isolation between redundant Ethernet channels. Type tested at 2257V rms for 60 seconds between Input and pass through power to Ethernet ports. Type tested at 2257V rms for 60 seconds between Input power and pass through power.	
Weight, approx (with mounting feet)	5.40 kg (11.90 lb)	5.62 kg (12.40 lb)
Module location	Panel mount	
Panel-mount screw torque	6.6 N•m (58 lb•in) - use M6 screw	
Wire category ⁽¹⁾	3 - on USB ports 2 - on power ports 2 - on Ethernet ports	
Wire type, Ethernet	RJ45 connector according to IEC 60603-7, 2 or 4 pair Category 5e minimum cable according to TIA 568-B.1 or Category 5 cable according to ISO/IEC 24702	M12, D-code, IP67 rated, quick disconnect cables Input and pass-through power connections are made via MINI sized, D-code, IP67 rated, quick disconnect cables
Wire size	PE Ground: 1.3...5.2 mm ² (16...10 AWG) Torque grounding screw to 2.0 N•m (17.7 lb•in)	
Enclosure type rating	UL Type 4x Meets IP67 (when marked) with receptacle dust caps or cable termination	

(1) Use this Conductor Category information to plan conductor routing. See Industrial Wiring and Grounding Guidelines, publication [1770-4.1](#).


Minimum Spacing Requirements - Armor CompactLogix Controllers and Armor Compact GuardLogix Controllers

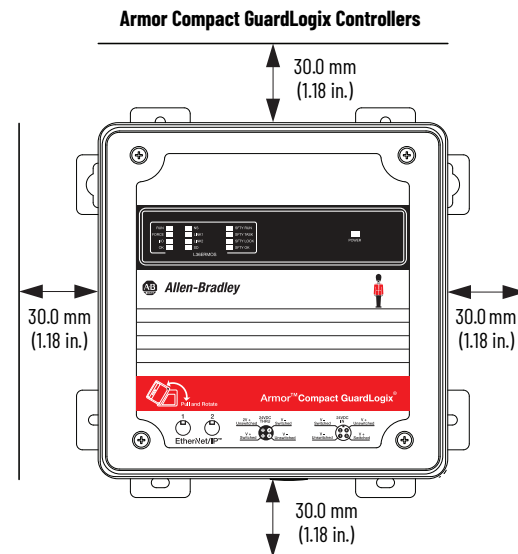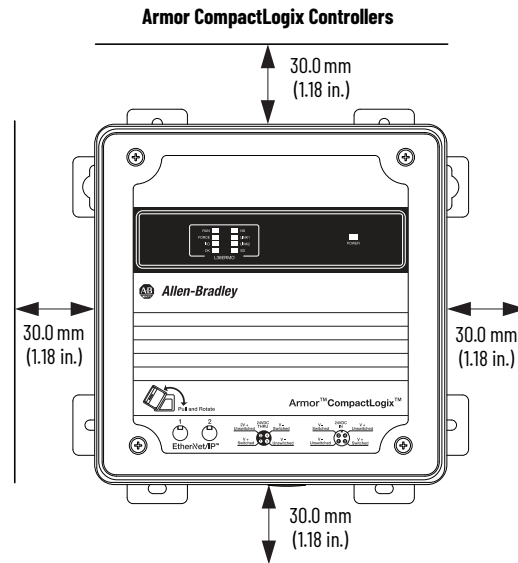

Dimensions - Armor CompactLogix Controllers and Armor Compact GuardLogix Controllers

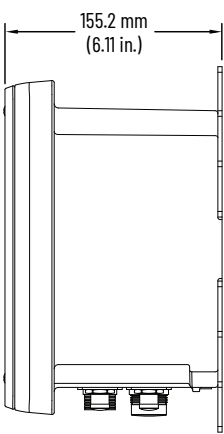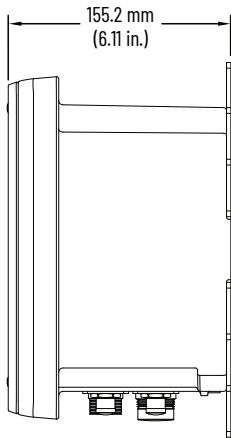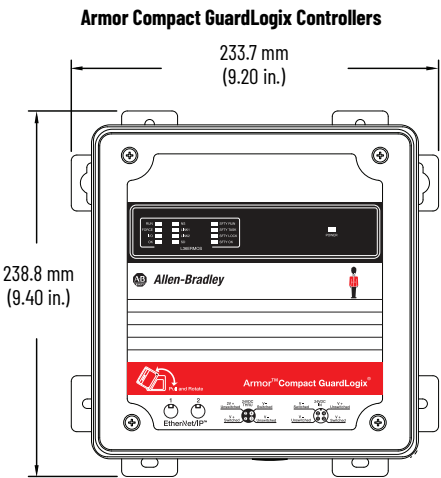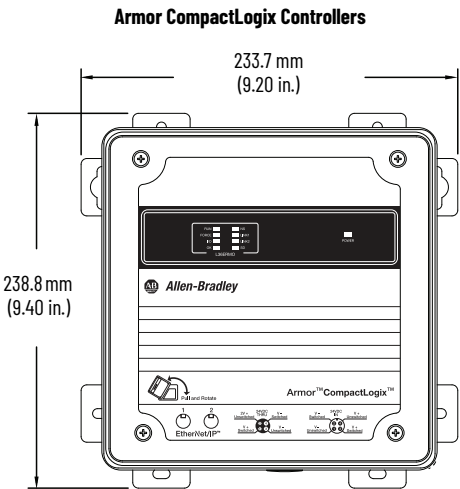

1769 Packaged CompactLogix Controllers with Embedded I/O

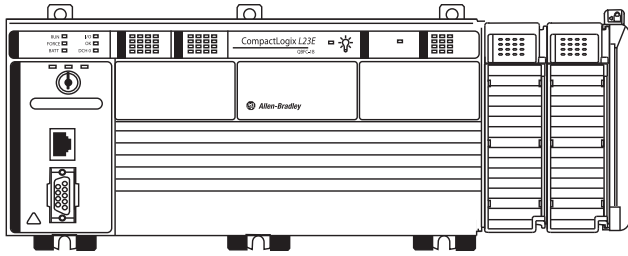

The 1769-L23x controllers provide the following functionality:

- Built-in power supply
- Either two serial ports or one serial and one Ethernet port, depending on controller catalog number
- Combination of embedded digital, analog, and high-speed counter module I/O modules
- 1769-ECR right-end cap

Features - 1769 Packaged CompactLogix Controllers

Characteristic	1769-L23E-0B1B	1769-L23E-0BFC1B	1769-L23-0BFC1B
Available user memory	512 KB		
CompactFlash card	-		
Communication ports	1 Ethernet port 1 RS-232 serial port (DF1 or ASCII)		2 RS-232 ports (isolated DF1 or ASCII; only nonisolated DF1)
Embedded I/O	16 DC inputs 16 DC outputs	16 DC inputs 16 DC outputs 4 analog inputs 2 analog outputs 4 high-speed counter modules	
Module expansion capacity	Up to three additional 1769 modules	Up to two additional 1769 modules	
Embedded power supply	24V DC		

You can add one or two additional 1769 modules to the right of the controller package. The modules that you can add depend on their current draw. Each packaged controller has the following amount of 5V DC bus current.

1769-L23x Available DC Current

Controller	Available 5V DC Bus Current
1769-L23E-0B1B	1000 mA
1769-L23E-0BFC1B	450 mA
1769-L23-0BFC1B	800 mA

Local I/O Performance - 1769 Packaged CompactLogix L23 Controllers

The requested packet interval (RPI) defines the frequency at which the controller sends and receives all I/O data on the backplane. The default RPI is 5 ms. The combination of embedded I/O in the packaged controllers determines the fastest RPI that you can configure.

Controller	Guideline
1769-L23E-0B1B	1...4 modules can be scanned in 1.0 ms
1769-L23E-0BFC1B	1...4 modules can be scanned in 1.5 ms
1769-L23-0BFC1B	5...6 modules can be scanned in 2.0 ms

You can always select an RPI that is slower than listed previously. These considerations show how fast modules can be scanned—not how fast an application can use the data. The RPI is asynchronous to the program scan. Other factors, such as program execution duration, affect I/O throughput.

Certifications - 1769 Packaged CompactLogix Controllers

Certification ⁽¹⁾	1769-L23-0BFC1B, 1769-L23E-0B1B, 1769-L23E-0BFC1B
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810.
CE	European Union 2004/108/EC EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)
RCM	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions
EtherNet/IP	ODVA conformance tested to EtherNet/IP specifications
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3

(1) When marked, see the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

Environmental Specifications - CompactLogix 5370 Controllers and Compact GuardLogix 5370 Controllers

Attribute	1769-L23-QBFC1B, 1769-L23E-QB1B, 1769-L23E-QBFC1B
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock)	0...60 °C (32...140 °F)
Temperature, storage IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Temperature, surrounding air, max	60 °C (140 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	20 g - DIN rail 30 g - Panel
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g - DIN rail 40 g - Panel
Emissions CISPR 11	IEC 61000-6-4
ESD immunity IEC 61000-4-2	4 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 200 Hz 50% Pulse 100% AM at 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM at 1890 MHz 10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±2 kV at 5 kHz on power ports ±2 kV at 5 kHz on signal ports ±2 kV at 5 kHz on communication ports
Surge transient immunity IEC 61000-4-5	±1 kV line-line (DM) and ±2 kV line-earth (CM) on power ports ±1 kV line-line (DM) and ±2 kV line-earth (CM) on signal ports ±2 kV line-earth (CM) on shielded ports ±2 kV line-earth (CM) on communication ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz

Technical Specifications - 1769 Packaged CompactLogix Controllers

Attribute	1769-L23E-QB1B	1769-L23E-QBFC1B	1769-L23-QBFC1B
User memory	512 KB		
Optional nonvolatile memory	None		
Number of expansion I/O modules, max	3 (limited by current draw of module)	2 (limited by current draw of module)	2 (limited by current draw of module)
Replacement battery	1769-BA		
Current draw @ 5V DC	1000 mA	450 mA	800 mA
Current draw @ 24V DC	700 mA	500 mA	600 mA
Power dissipation	7.01 W	13.58 W	10.73 W
Isolation voltage	30V (continuous), basic insulation type Type tested at 710V DC for 60 s; RS-232 to system backplane, Ethernet to system backplane, and RS-232 to Ethernet		30V (continuous), basic insulation type Type tested at 710V DC for 60 s; RS-232 channel 0 to system backplane, no isolation between RS-232 channel 1 and system
Serial communication ports	CH0 - RS-232 DF1, DH-485, ASCII Fully isolated 38.4 Kbps max		CH0 - RS-232 DF1, DH-485, ASCII Fully isolated 38.4 Kbps max CH1 - RS-232 DF1, DH-485 Nonisolated 38.4 Kbps max
Serial cables	1756-CP3 or 1747-CP3, right angle connector to controller, straight to serial port, 3 m (9.84 ft)		
Weight, approx	0.91 kg (2 lb)	1.22 kg (2.7 lb)	1.22 kg (2.7 lb)
Slot width	1		
Module location	DIN rail or panel mount		
Mounting screw torque	1.1...1.8 N•m (10...16 lb•in) - use M4 or #8 screws		
Wire category ⁽¹⁾	2 - on signal ports 2 - on power ports 2 - on communication ports		
Wire type, Ethernet	RJ45 connector according to IEC 60603-7, 2 or 4 pair Category 5e minimum cable according to TIA 568-B.1 or Category 5 cable according to ISO/IEC 24702		-
Wire size, DC power	0.25...2.5 mm ² (22...14 AWG) solid or stranded copper wire rated at 75 °C (167 °F) or greater, 1.2 mm (3/64 in.) insulation max		
Wire size, digital I/O connections	0.5...0.8 mm ² (20...18 AWG) solid or stranded copper wire rated at 75 °C (167 °F) or greater, 1.2 mm (3/64 in.) insulation max		
Wire size, embedded analog and high-speed counter module connections	0.5...0.8 mm ² (20...18 AWG) solid or stranded shielded copper wire rated at 75 °C (167 °F) or greater, 1.2 mm (3/64 in.) insulation max		
North American temperature code	T3C		
Enclosure type rating	None (open-style)		

(1) Use this conductor category information to plan conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).



Embedded DC Input Specifications

Attribute	1769-L23E-QB1B, 1769-L23E-QBFC1B, 1769-L23-QBFC1B
Inputs	16 (8 points/group)
Voltage category	24V DC sink/source
Operating voltage range	10...30V DC @ 30 °C (86 °F) 10...26.4V DC @ 60 °C (140 °F)
Digital filter, off to on	0 s, 100 µs, 500 µs, 1 ms, 2 ms
Input delay, off to on	100 µs (typical), 300 µs (max)
Digital filter, on to off	0 s, 100 µs, 500 µs, 1 ms, 2 ms
Input delay, on to off	250 µs (typical), 1 ms (max)
Off-state voltage, max	5V DC
Off-state current, max	1.5 mA
On-state current, min	2 mA @ 10V DC
Inrush current, max	250 mA
Input impedance, max	3 kΩ
Cyclic update time	100 µs...750 ms
Isolation voltage	75V (continuous), basic insulation type Type tested at 1200V AC for 60 s; inputs to system backplane and input group to input group
IEC input compatibility	Type 3
Isolated groups	Group 1: inputs 0...7 Group 2: inputs 8...15 Isolated groups operate in either sink or source configurations

Embedded DC Output Specifications

Attribute	1769-L23E-QB1B, 1769-L23E-QBFC1B, 1769-L23-QBFC1B
Outputs	16
Voltage category	24V DC source
Operating voltage range	20.4...26.4V DC
Output delay, off to on	0.1 ms
Output delay, on to off	1.0 ms
Off-state leakage current, max	1.0 mA @ 26.4V DC
On-state current, min	1.0 mA
On-state voltage drop, max	1.0V DC @ 1.0 A
Current per point, max	0.5 A @ 60 °C (140 °F) 1.0 A @ 30 °C (86 °F) Also see the derating graphs
Current per module, max	4.0 A @ 60 °C (140 °F) 8.0 A @ 30 °C (86 °F) Also see the derating graphs on page 31
Surge current per point	2 A for 10 ms per point, repeatable every 2 s
Load current, min	3 mA per point
Isolation voltage	75V (continuous), basic insulation type Type tested at 1200V AC for 60 s; outputs to system backplane
Isolated groups	Group 1: Outputs 0...15 (internally connected to common)
Pilot duty rating	0.5 A, 24V DC @ 60 °C (140 °F) 1.0 A, 24V DC @ 30 °C (86 °F)

Embedded DC Output Temperature Derating

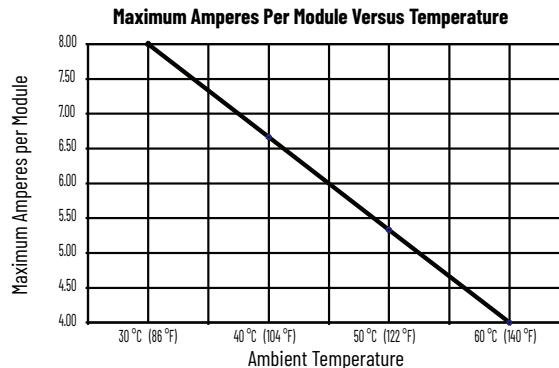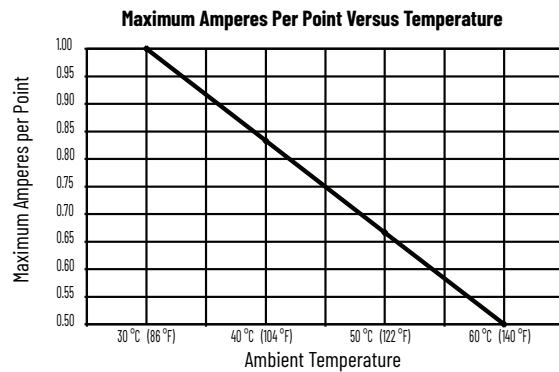

Embedded Analog Input Specifications

Attribute	1769-L23E-QB1B, 1769-L23E-QBFC1B, 1769-L23-QBFC1B
Inputs	4 differential or single-ended
Input range	0...10.5V 0...21 mA
Resolution	8 bits plus sign (sign is always positive).
Input impedance	Voltage: 150 kΩ nom Current: 150 Ω nom
Converter type	Successive approximation
Response speed per channel	5 ms
Rated working voltage	30V AC/30V DC
Common mode voltage	10V DC max per channel
Common mode rejection	Greater than 60 dB at 60 Hz at 10V between inputs and analog common
Normal mode rejection ratio	None
Accuracy, overall at 25 °C (77 °F) ⁽¹⁾	Voltage: ±0.7% full-scale, Current: ±0.6% full-scale
Accuracy, overall at 0...60 °C (32...140 °F)	Voltage: ±0.9% full-scale, Current: ±0.8% full-scale
Accuracy drift	Voltage: ±0.006% per °C, Current: ±0.006% per °C
Calibration	Not required; components provide accuracy
Non-linearity (in percent full-scale)	±0.4%
Repeatability	±0.4%
Overload at input terminals, max	Voltage: 20V continuous, 0.1 mA Current: 32 mA continuous, +5V DC
Channel diagnostics	Overrange by bit reporting
Isolation voltage	30V (continuous), basic insulation type Type tested at 500V AC for 60 s; inputs to system backplane and outputs to system backplane

(1) Includes offset, gain, non-linearity, and repeatability error terms.

Embedded Analog Output Specifications

Attribute	1769-L23E-QB1B, 1769-L23E-QBFC1B, 1769-L23-QBFC1B
Outputs	2 single-ended
Output range	0...10.5V 0...21 mA
Converter type	Resistor string
Resolution, max	8 bits plus sign (sign is always positive, Bit 15 = 0)
Response speed per channel	0.3 ms for rated resistance and rated inductance 3.0 ms for rated capacitance
Current load on voltage output	10 mA max
Resistive load on current output	0...300 Ω (includes wire resistance)
Load range on voltage output	> 1 k Ω at 10V DC
Inductive load, max (current outputs)	0.1 mH
Capacitive load, max (voltage outputs)	1 μ F
Accuracy, overall at 25 °C (77 °F) ⁽¹⁾	Voltage: $\pm 0.5\%$ full-scale Current: $\pm 0.5\%$ full-scale
Accuracy, overall at 0...60 °C (32...140 °F)	Voltage: $\pm 0.6\%$ full-scale Current: $\pm 1.0\%$ full-scale
Accuracy drift with temperature	Voltage: $\pm 0.01\%$ full-scale per °C Current: $\pm 0.01\%$ full-scale per °C
Output ripple range 0...50 kHz (referred to output range)	$\pm 0.05\%$
Non-linearity	$\pm 0.4\%$ (in percent full-scale)
Repeatability	$\pm 0.05\%$ (in percent full-scale)
Output impedance	10 Ω nom
Open and short circuit protection	Yes
Short circuit, max	Current: 40 mA
Open circuit, max	Voltage: 15V
Output response at system power-up and powerdown	+2.0...-1.0V DC spike for less than 6 ms
Isolation voltage	30V (continuous), basic insulation type Type tested at 500V AC for 60 s; inputs to system backplane and outputs to system backplane

(1) Includes offset, gain, drift, non-linearity, and repeatability error terms.

Embedded HSC Module Input Specifications

Attribute	1769-L23E-QB1B, 1769-L23E-QBFC1B, 1769-L23-QBFC1B
Input frequency, max	250 kHz
Input current, max	15 mA
Input current, min	6.8 mA
Input voltage range	-30...+30V DC ⁽¹⁾
On-state voltage range	2.6...30V DC
On-state current, min	6.8 mA
Off-state voltage, max	1.0V DC
Off-state current, max	1.5 mA
Off-state leakage current, max	1.5 mA
Input impedance, nom	1950 Ω
Pulse width, min	2.5 μ s
Phase separation, min	1.084 μ s
Isolation voltage	75V (continuous), basic insulation type Type tested at 1200V AC for 60 s; inputs to system backplane and input to input


(1) See [Embedded HSC Module Temperature Derating](#) temperature derating.

Embedded HSC Module Output Specifications

Attribute	1769-L23E-QB1B, 1769-L23E-QBFC1B, 1769-L23-QBFC1B
Output voltage range	5...30V DC
On-state voltage, max	User power - 0.1V DC
On-state output current, max	1 A per point 4 A per module
On-state output current, min	1 mA
On-state voltage drop, max	0.5V DC
Off-state leakage current, max	5 μ A
Turn-on time, max	400 μ s
Turn-off time, max	200 μ s
Reverse polarity protection	30V DC
Isolation voltage	75V (continuous), basic insulation type Type tested at 1200V AC for 60 s; inputs to system backplane and input to input

Embedded HSC Module Temperature Derating


Maximum Input Voltage - 24V DC Operation

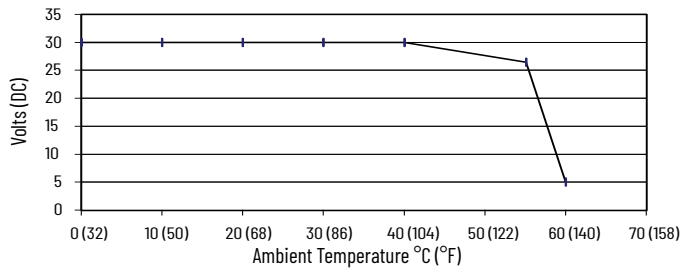

Temperature	Derated Voltage ⁽¹⁾
0...40 °C (32...104 °F)	30V DC
55 °C (131 °F)	26.4V DC
60 °C (140 °F)	5V DC


(1) You achieve an input voltage derating 55...60 °C (131...140 °F) by using a drop resistor. For 24V DC input voltage, use a 2.4 kΩ, 1/2 Watt resistor. For input voltages other than 24V DC, use a 1/2 W resistor with value: $125 \times (V_{in} - 5V)$.

Maximum Output Current Per Module - 5V DC Operation

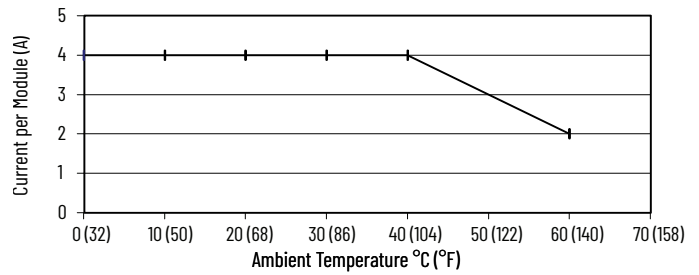


Temperature	Derated Current
0...40 °C (32...104 °F)	4 A
60 °C (140 °F)	2 A

Maximum Output Voltage - 24V DC Operation

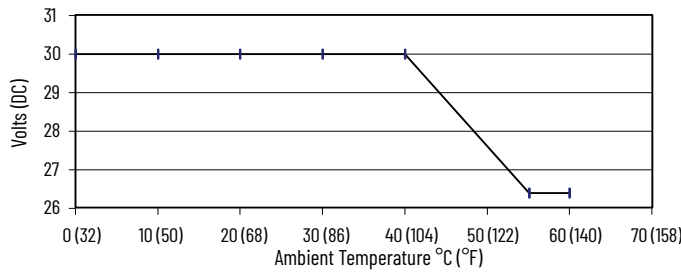


Temperature	Derated Voltage
0...40 °C (32...104 °F)	30V DC
55...60 °C (131...140 °F)	26.4V DC

Maximum Output Current Per Point - 24V DC Operation

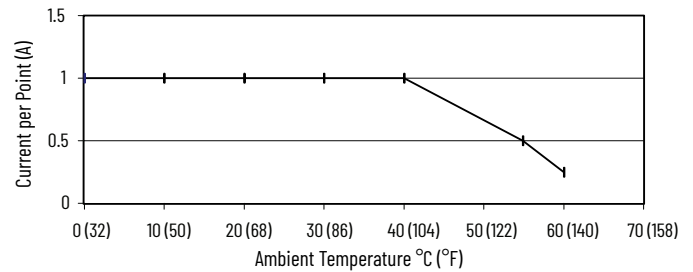


Temperature	Derated Current
0...40 °C (32...104 °F)	1 A
55 °C (131 °F)	0.5 A
60 °C (140 °F)	0.25 A

Maximum Output Current Per Point - 5V DC Operation

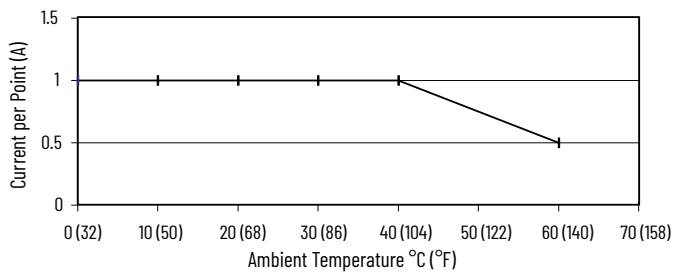

Temperature	Derated Current
0...40 °C (32...104 °F)	1 A
60 °C (140 °F)	0.5 A

Maximum Output Current Per Module - 5V DC Operation

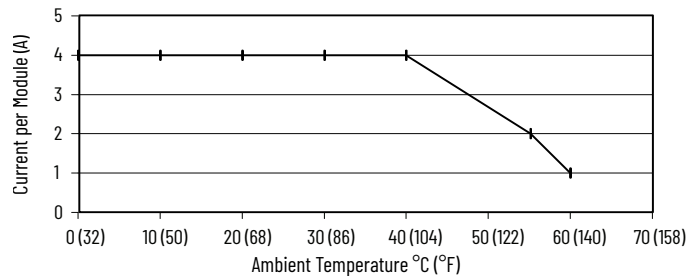


Temperature	Derated Current
0...40 °C (32...104 °F)	4 A
55 °C (131 °F)	2 A
60 °C (140 °F)	1 A


Embedded Power Supply

Attribute	1769-L23E-QB1B, 1769-L23E-QBFC1B, 1769-L23-QBFC1B
Input voltage range	19.2...31.2V DC
Input voltage, nom	24V AC
Line requirement, max	50VA at 24V DC
Available 5V DC bus current	1769-L23E-QB1B: 1 A (1000 mA) 1769-L23E-QBFC1B: 450 mA 1769-L23-QBFC1B: 800 mA
Inrush, max	30 A @ 31.2V DC
Line loss ride-through	10 ms...10 s
Output bus current capacity	2 A @ 5V DC 0.8 A @ 24V DC
0...55 °C (32...131 °F) 55...60 °C (131...140 °F)	See temperature derating graphs
Load current, min	0 mA @ 5V DC 0 mA @ 24V DC
Short circuit protection	Front access fuse Replacement part number: Wickmann 19193-6.3A
Overvoltage protection	Yes
Isolation voltage	75V (continuous), basic insulation type Type tested at 1200V AC for 60 s; power to system backplane


Embedded Power Supply Temperature Derating

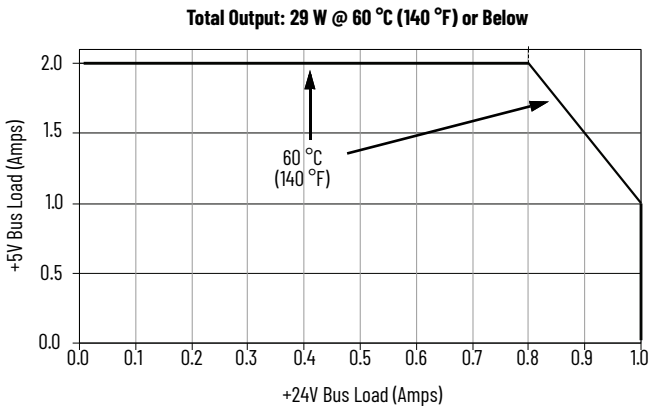


Minimum Spacing Requirements -
1769 Packaged CompactLogix Controllers

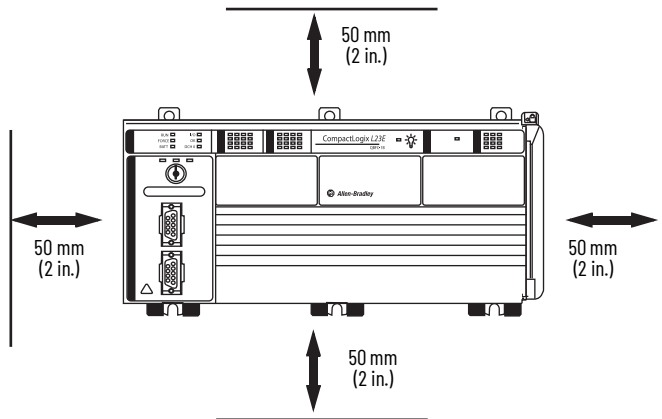

Dimensions - 1769 Packaged CompactLogix Controllers

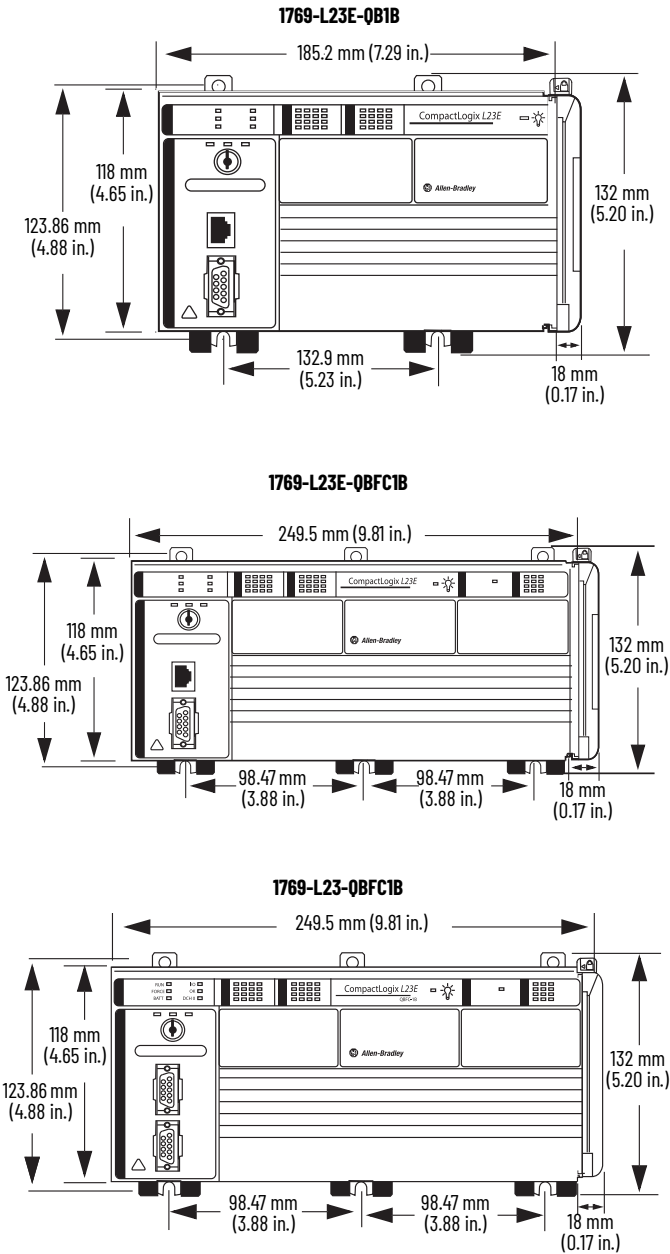

1769 Modular CompactLogix Controllers

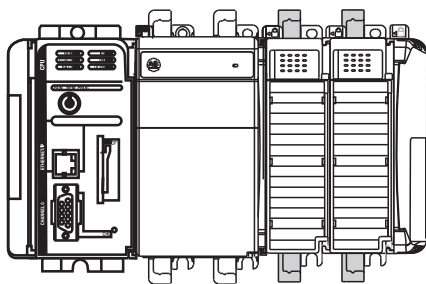


In a 1769-L3x controller system, the 1769 I/O modules can be placed to the left and the right of the power supply. As many as eight modules can be placed on each side of the power supply.

Features - 1769 Modular CompactLogix Controllers

Characteristic	1769-L31	1769-L32C	1769-L32E, 1769-L32EK	1769-L35CR	1769-L35E
Available user memory	512 KB	750 KB		1.5 MB	
CompactFlash card	1784-CF128				
Communication ports	2 RS-232 ports (isolated DF1 or ASCII; only nonisolated DF1)	1 ControlNet port	1 Ethernet port	1 ControlNet port	1 Ethernet port
		1 RS-232 serial port (DF1 or ASCII)			
Module expansion capacity	16 1769 modules			30 1769 modules	
Power supply distance rating	4 modules				

The CompactLogix controller has a power supply distance-rating of four modules. The controller must be the leftmost module in the first bank of the system. The maximum configuration for the first bank of a CompactLogix controller includes the following:

- The controller
- Three I/O modules to the left of the power supply
- Eight I/O modules to the right of the power supply

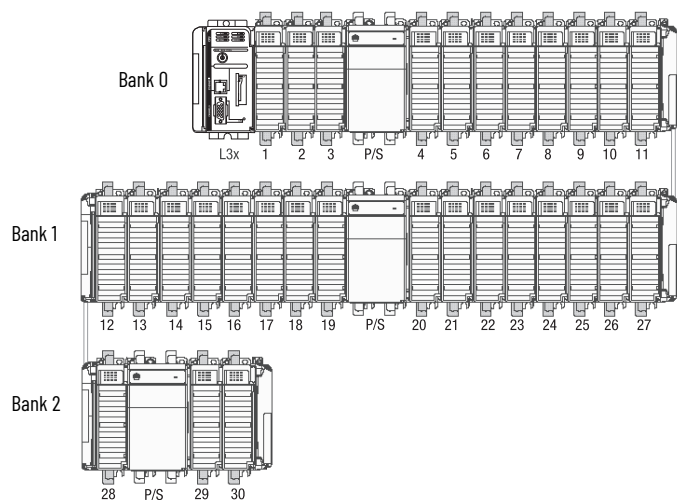

Local I/O Performance - 1769 CompactLogix L3 Controllers

You can configure an individual RPI for each local 1769 Compact I/O module. The RPI defines the frequency at which the controller sends and receives all I/O data on the backplane.

Type of Module	Guideline
Digital and analog (any mix)	1...4 modules can be scanned in 1 ms 5...30 modules can be scanned in 2 ms Some input modules have a fixed 8 ms filter, so selection of a faster RPI has no effect
Specialty	Full-sized 1769-SDN modules add 2 ms per module 1769-HSC modules add 1 ms per module Full-sized 1769-ASCII modules add 1 ms per module

You can always select an RPI that is slower than listed previously. These considerations show how fast modules can be scanned—not how fast an application can use the data. The RPI is asynchronous to the program scan. Other factors, such as program execution duration, affect I/O throughput.

Certifications - 1769 Modular CompactLogix Controllers

Certification ⁽¹⁾	1769-L31	1769-L32C 1769-L35CR	1769-L32E, 1769-L32EK 1769-L35E
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810.		
CE	European Union 2004/108/EC EMC Directive, compliant with: EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61131-2; Programmable Controllers (Clause 8, Zone A & B)		–
RCM	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions		
EX	–	–	European Union 94/9/EC ATEX Directive, compliant with: EN 60079-15; Potentially Explosive Atmospheres, Protection 'n' EN 60079-0; General Requirements (Zone 2) II 3 G Ex nA IIC T4 Gc
ODVA	–	ControlNet International conformance tested to ControlNet specifications	ODVA conformance tested to EtherNet/IP specifications.
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3		

(1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

Environmental Specifications - 1769 Modular CompactLogix Controllers

Attribute	1769-L31	1769-L32C 1769-L35CR	1769-L32E, 1769-L32EK 1769-L35E
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Na, Operating Thermal Shock)	0...60 °C (32...140 °F)		
Temperature, storage IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)		
Temperature, surrounding air, max	60 °C (140 °F)		
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing		
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz		
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	20 g - DIN rail 30 g - Panel		
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g - DIN rail 40 g - Panel		
Emissions CISPR 11	IEC 61000-6-4		
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges		
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz		
	-		3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz
EFT/B immunity IEC 61000-4-4	±2 kV at 5 kHz on communication ports		±3 kV at 5 kHz on power ports ±3 kV at 5 kHz on communication ports
Surge transient immunity IEC 61000-4-5	Channel 0: ±2 kV line-earth (CM) on shielded ports Channel 1: ±1 kV line-earth (CM) on shielded ports	±2 kV line-earth (CM) on communication ports	
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz		

Technical Specifications - 1769 Modular CompactLogix Controllers

Attribute	1769-L31	1769-L32E, 1769-L32EK	1769-L32C	1769-L35CR	1769-L35E
User memory	512 KB	750 KB			1.5 MB
Optional nonvolatile memory	1784-CF128				
Number of I/O modules, max	16			30	
Number of I/O banks, max	3				
Number of expansion I/O modules, max	16 - 1769 modules			30 - 1769 modules	
Replacement battery	1769-BA				
Current draw @ 5V DC	330 mA	660 mA	650 mA	680 mA	660 mA
Current draw @ 24V DC	40 mA	90 mA	40 mA		90 mA
Power dissipation	2.61 W	5.5 W	4.21 W	4.36 W	5.5 W
Isolation voltage	30V (continuous), basic insulation type Type tested at 710V DC for 60 s				
	RS-232 channel 0 to system No isolation between RS-232 channel 1 and system	RS-232 to system, Ethernet to system, RS-232 to Ethernet	RS-232 to system, ControlNet to system, ControlNet channel A to ControlNet channel B		RS-232 to system, Ethernet to system, RS-232 to Ethernet
Communication ports	CH0 - RS-232 DF1, DH-485, ASCII Fully isolated 38.4 Kbps max CH1 - RS-232 DF1, DH-485 Nonisolated 38.4 Kbps max	RS-232 Fully isolated 38.4 Kbps max Ethernet port 10/100 BASE-T	RS-232 Fully isolated 38.4 Kbps max ControlNet port		RS-232 Fully isolated 38.4 Kbps max Ethernet port 10/100 BASE-T
Serial cables	1756-CP3 or 1747-CP3, right angle connector to controller, straight to serial port, 3 m				
Weight, approx	0.30 kg (0.66 lb)		0.32 kg (0.70 lb)		0.30 kg (0.66 lb)
Slot width	1				
Module location	DIN rail or panel mount				
Panel-mount screw torque	1.1...1.8 N•m (10...16 lb•in) - use M4 or #8 screws				
Power supply distance rating	4 modules				
Power supply	1769-PA2, 1769-PB2, 1769-PA4, 1769-PB4				
Wire category ⁽¹⁾	2 - on communication ports				
North American temp code	T5	T4A			
IEC temp code	—	T4	—		T4
Enclosure type rating	None (open-style)				


(1) Use this conductor category information to plan conductor routing. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](#).

Real-time Clock Accuracy


This table lists the real-time clock accuracy specifications for the 1769 Modular CompactLogix controllers.

Ambient Temperature	Accuracy
0 °C (32 °F)	+54...-56 s/mo
25 °C (77 °F)	+9...-124 s/mo
40 °C (104 °F)	-84...-234 s/mo
55 °C (131 °F)	-228...-394 s/mo
60 °C (140 °F)	-287...-459 s/mo


Minimum Spacing Requirements - 1769 Modular CompactLogix Controllers

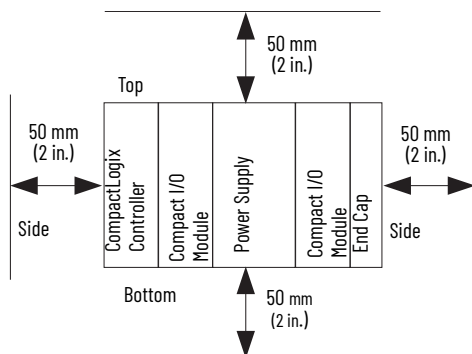


Dimensions - 1769 Modular CompactLogix Controllers

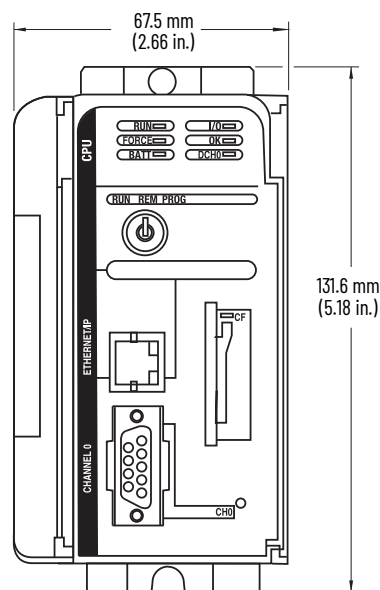

Side View

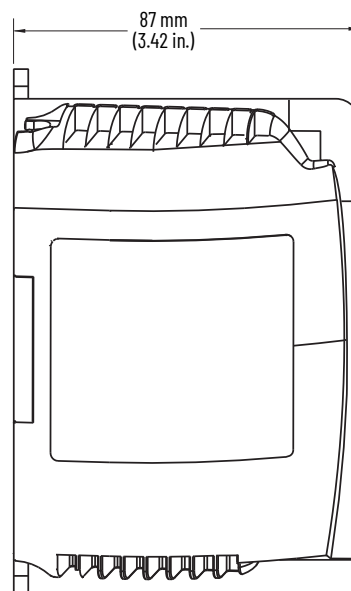

1768 CompactLogix Controllers

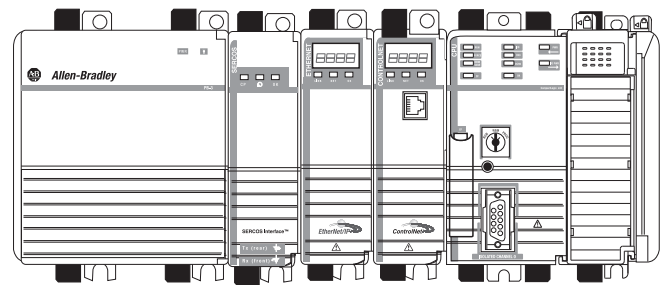

The 1768-L4x controller combines both a 1768 backplane and a 1769 backplane. The 1768 backplane supports the 1768 controller, the 1768 power supply, and a maximum of four 1768 modules. The 1769 backplane supports 1769 modules.

Features - 1768 CompactLogix Controllers


Characteristic	1768-L43	1768-L45	1768-L43S	1768-L45S
Available user memory	2 MB	3 MB	2 MB standard 0.5 MB safety	3 MB standard 1 MB safety
CompactFlash card	1784-CF128			
Communication options	EtherNet/IP (standard and safety) ControlNet (standard and safety) DeviceNet (standard)			
Serial communication port	1 RS-232 port			
Module expansion capacity	Two 1768 modules Sixteen 1769 modules			
Power supply distance rating	-			
Programming languages	Relay ladder Structured Text Function block Sequential Function Chart		Standard task: all languages Safety task: relay ladder, safety application instructions	

Compact GuardLogix Safety System

The Compact GuardLogix controller is a 1768-L4xS CompactLogix controller that provides safety control to achieve SIL 3/PLe according to ISO 13849. A major benefit of this system is that it's still one project; safety and standard control together. See [page 3](#) for more information on how to develop projects with Compact GuardLogix controllers.


Placement - 1768 CompactLogix L4 Controllers

In a 1768-L4x controller system, place 1768 modules between the power supply and the controller.

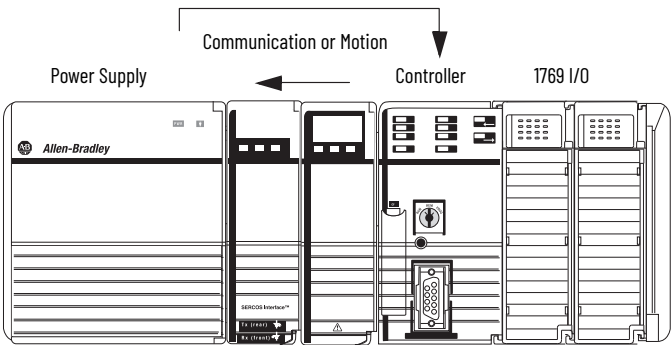

Place the 1769 modules to the right of the 1768 backplane:

- As many as eight 1769 modules can be attached to the right of the 1768 system.
- The 1769 I/O connected directly to the 1768 backplane does not need a 1769 power supply.
- Additional 1769 modules must be in additional I/O banks.
- Each additional I/O bank must have its own 1769 power supply.

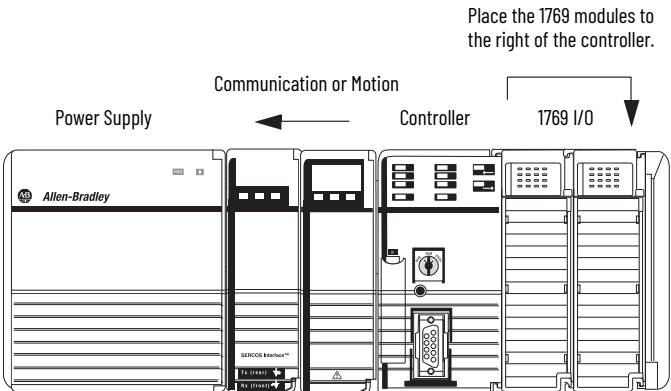

Local I/O Performance - 1768 CompactLogix L4 Controllers

Configure an individual RPI for each local 1769 Compact I/O module. Use the default RPI numbers that the programming software automatically assigns or select faster RPI values as fast as 1 ms. I/O module update times do not affect overall 1768 bus performance in the following situations:

- Use faster RPI values for time critical I/O without impacting overall 1769 Compact I/O performance.
- Use Immediate Output (IOT) instructions for further reduction in I/O module update times.

Certifications - 1768 CompactLogix Controllers

Certification ⁽¹⁾	1768-L43 1768-L45	1768-L43S 1768-L45S
c-UL-us	UL Listed Industrial Control Equipment, certified for US and Canada. See UL File E65584. UL Listed for Class I, Division 2 Group A,B,C,D Hazardous Locations, certified for U.S. and Canada. See UL File E194810.	
CE	European Union 2004/108/EC EMC Directive, compliant with: EN 61326-1; Meas./Control/Lab., Industrial Requirements EN 61000-6-2; Industrial Immunity EN 61000-6-4; Industrial Emissions EN 6131-2; Programmable Controllers (Clause 8, Zone A & B)	
RCM	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions	
Ex	-	European Union 94/9/EC ATEX Directive, compliant with: EN 60079-15; Potentially Explosive Atmospheres, Protection 'n' EN60079-0; General Requirements II 3 G Ex nA nL IIC T4 Gc
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3	
Functional Safety ⁽²⁾	-	Certified by TÜV: capable of SIL 1 to 3, according to IEC 61508; and PLe/Cat. 4 according to ISO 13849-1

(1) When marked. See the Product Certification link at [rok/auto/certifications](http://rockwellautomation.com/rok/auto/certifications) for Declarations of Conformity, Certificates, and other certification details.

(2) When used with specified programming software versions.

Environmental Specifications - 1768 CompactLogix Controllers

Attribute	1768-L43, 1768-L43S, 1768-L45, 1768-L45S
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold) IEC 60068-2-2 (Test Bd, Operating Dry Heat) IEC 60068-2-14 (Test Na, Operating Thermal Shock)	0...60 °C (32...140 °F)
Temperature, storage IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Temperature, surrounding air, max	60 °C (140 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	5 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	50 g
Emissions CISPR 11	IEC 61000-6-4
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz

Environmental Specifications - 1768 CompactLogix Controllers


Attribute	1768-L43, 1768-L43S, 1768-L45, 1768-L45S
EFT/B immunity IEC 61000-4-4	±4 kV at 5 kHz on communication ports
Surge transient immunity IEC 61000-4-5	±2 kV line-earth (CM) on communication ports
Conducted RF immunity IEC 61000-4-6	10V rms with 1 kHz sine wave 80% AM from 150 kHz...80 MHz

Technical Specifications - 1768 CompactLogix Controllers


Attribute	1768-L43	1768-L43S	1768-L45	1768-L45S
User memory	2 MB	2 MB standard 0.5 MB safety	3 MB	3 MB standard 1 MB safety
Optional nonvolatile memory	1784-CF128			
Number of 1768 modules, max	2		4	
Number of 1768 communication modules, max	2			
Number of 1768 motion modules, max	2		4	
Number of 1769 I/O modules, max	16		30	
Number of I/O banks, max	2		3	
Replacement battery	-			
Backplane current draw @ 24V DC	1.3 A	1.4 A	2.0 A	2.1 A
1768 current draw @ 5V DC	2.8 A		5.6 A	
1769 current draw @ 5V DC	2.0 A		2.0 A	
Total 1768 and 1769 current draw @ 5V DC	4.8 A		7.6 A	
Power dissipation	6.3 W	7.5 W	8.3 W	9.5 W
Power consumption	31.3 W	33.6 W	48.0 W	50.4 W
Isolation voltage	30V (continuous), functional insulation type Type tested at 500V AC for 60 s; RS-232 to system			
Communication ports	RS-232 Fully isolated, 38.4 Kbps max			
Serial cables	1756-CP3 or 1747-CP3, right angle connector to controller, straight to serial port, 3 m			
Weight, approx	0.34 kg (11.99 oz)	0.45 kg (15.9 oz)	0.34 kg (11.99 oz)	0.45 kg (15.9 oz)
Dimensions (HxWxD)	131.1 x 56.4 x 121.1 mm (5.18 x 2.22 x 4.81 in.)	131.6 x 89.6 x 122.1 mm (5.18 x 3.53 x 4.81 in.)	131.1 x 56.4 x 121.1 mm (5.18 x 2.22 x 4.81 in.)	131.6 x 89.6 x 122.1 mm (5.18 x 3.53 x 4.81 in.)
Slot width	1	1.5	1	1.5
Module location	DIN rail or panel mount			
Panel-mount screw torque	1.16 N·m (10 lb·in) - use M4 or #8 screws			
Power supply distance rating	4 modules			
Power supply	1768-PA3, 1768-PB3			
Wire category ⁽¹⁾	2 - on communication ports			
IEC temperature code	-	T4	-	T4
North American temperature code	T4			
Enclosure type rating	None (open-style)			

(1) Use this conductor category information to plan conductor routing as described in the system-level installation manual. See the Industrial Automation Wiring and Grounding Guidelines, publication [1770-4.1](http://rockwellautomation.com/1770-4.1).


Power Dissipation - 1768 CompactLogix Controllers

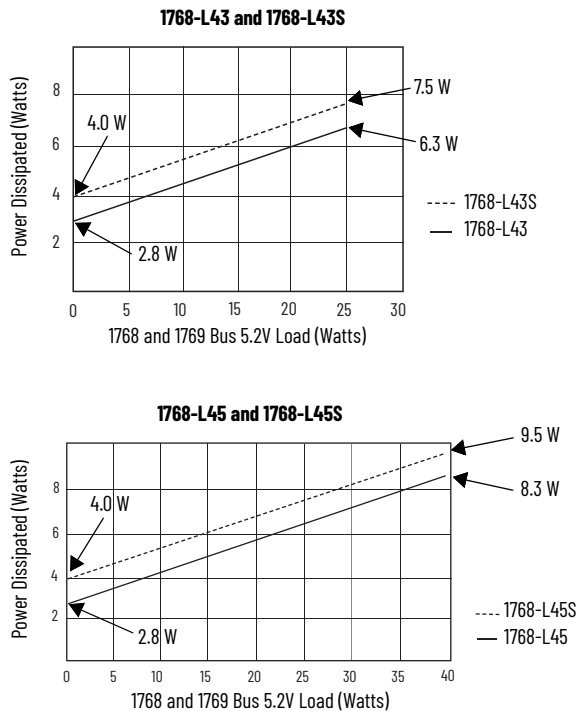


Slot Numbering - 1768 CompactLogix Controllers

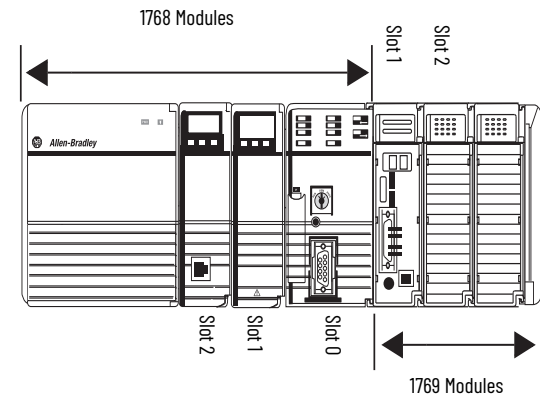

Minimum Spacing Requirements - 1768 CompactLogix Controllers

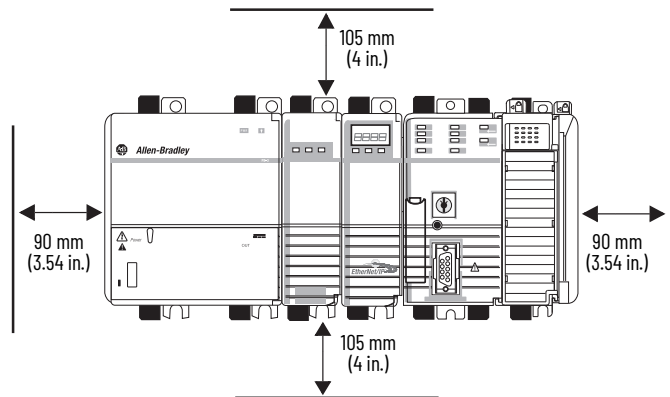

Dimensions - 1768 CompactLogix Controllers

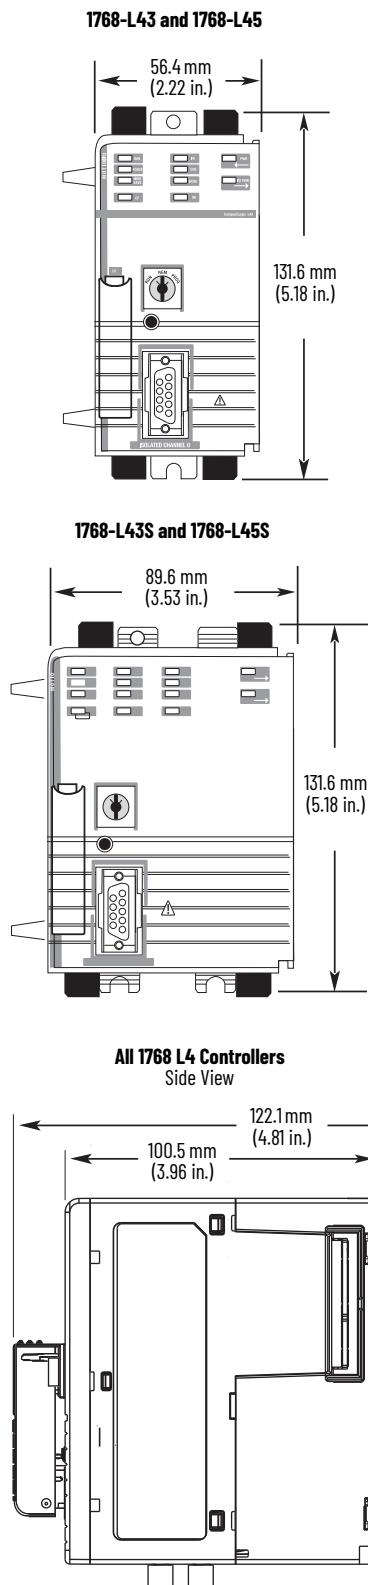

Controller Memory Use

These equations provide an estimate of the memory that is needed for a controller. These numbers are rough estimates.

Controller tasks	_____ * 4000	=	_____ bytes (minimum 1 task)
Digital I/O points	_____ * 400	=	_____ bytes
Analog I/O points	_____ * 2600	=	_____ bytes
DeviceNet modules ⁽¹⁾	_____ * 7400	=	_____ bytes
Other communication modules ⁽²⁾	_____ * 2000	=	_____ bytes
Motion axes	_____ * 8000	=	_____ bytes
FactoryTalk [®] alarm instruction	_____ * 1000	=	_____ bytes (per alarm)
FactoryTalk subscriber	_____ * 10000	=	_____ bytes

(1) The first DeviceNet module is 7400 bytes. Additional DeviceNet modules are 5800 bytes each.

(2) Count all communication modules in the system, not just the modules in the local chassis. This total includes device connection modules, adapters, and ports on PanelView[™] terminals.

Reserve 20...30% of the controller memory for future expansion.

Controller Compatibility

This section details the other devices that your controller can control and communicate with.

Control Distributed I/O Modules

The controller can control these distributed I/O modules.

I/O Modules	CompactLogix 5370 1768-ENBT 1769-L23Ex 1769-L32E, 1769-L32EK, 1769-L35E EtherNet/IP Network ⁽¹⁾	1768-CNB, 1768-CNBR 1769-L32C, 1769-L35CR ControlNet Network	CompactLogix 5370 L2 and L3 1769-SDN DeviceNet Network ^{(2) (3)}
-------------	---	---	---

Chassis-based I/O			
1746 SLC [™] I/O	Yes	No	No
1756 ControlLogix [®] I/O	Yes	Yes	Yes
1769 Compact I/O	No	No	Yes
1771 Universal I/O	No	No	No

In-cabinet I/O			
1734 POINT I/O	Yes	Yes	Yes
1734D POINTBlock I/O	Yes	Yes	Yes
1790, 1790D, 1790P CompactBlock [™] LDX I/O	No	No	Yes
1791D, 1791P, 1791R CompactBlock I/O	No	No	Yes
1794 FLEX [™] I/O	Yes	Yes	Yes
1797 FLEX Ex [™] I/O	Yes	Yes	No

On-machine I/O			
1732 ArmorBlock [®] I/O	Yes	No	Yes
1738 ArmorPOINT [®] I/O	Yes	Yes	No
1792D ArmorBlock [®] MaXum [™] I/O	No	No	Yes
1799 Embedded I/O	No	No	Yes

(1) A non-EtherNet/IP CompactLogix controller requires a 1761-NET-ENI interface to connect to an EtherNet/IP network. This interface is only a messaging bridge.

(2) To control I/O, use a 1769-SDN scanner to connect the controller to the DeviceNet network.

(3) The 1769-SDN does not support safety communication to Guard I/O modules on a DeviceNet network.

Control Safety I/O Modules

The Compact GuardLogix controller can control these safety I/O modules in a safety system.

I/O Modules	EtherNet/IP	ControlNet
1791ES CompactBlock [™] Guard I/O [™]	Yes	No
1734 POINT Guard I/O [™]	Yes	No

Communicate with Devices

The controller can communicate with these devices.

Device	EtherNet/IP ⁽¹⁾ Network	ControlNet Network	DeviceNet ⁽²⁾ Network	RS-232 (DF1) Network	DH-485 Network
Programmable controllers					
1756 ControlLogix and 1756 GuardLogix	Yes	Yes	Yes	Yes	Yes
CompactLogix 5370	Yes	No	Yes ⁽³⁾	Yes ⁽⁴⁾	Yes ⁽⁵⁾
1768-L4x CompactLogix	Yes	Yes	Yes	Yes	Yes
1769-L3x CompactLogix	Yes	Yes	Yes	Yes	Yes
1769-L23x CompactLogix	Yes	No	Yes	Yes	Yes
1789 SoftLogix™ 5800	Yes	Yes	Yes	Yes	No
1794 FlexLogix™	Yes	Yes	Yes	Yes	Yes
PowerFlex® with DriveLogix™	Yes	Yes	Yes	Yes	Yes
1785 PLC-5®	Yes ⁽⁶⁾ (7)	Yes	Yes ⁽⁸⁾	Yes	—
1747 SLC	Yes ⁽⁹⁾	Yes	Yes ⁽⁴⁾	Yes	Yes
1761 MicroLogix™	Yes	No	Yes ⁽⁴⁾	Yes	Yes
1762 MicroLogix	Yes	No	Yes ⁽⁴⁾	Yes	Yes
1763 MicroLogix	Yes	No	Yes ⁽⁴⁾	Yes	Yes
1764 MicroLogix	Yes	No	Yes ⁽⁴⁾	Yes	Yes
1772 PLC-2®	—	—	—	Yes	—
1775 PLC-3®	—	—	—	Yes	—
5250 PLC-5/250	—	—	No	Yes	—
Industrial Computers					
Allen-Bradley® industrial computers (all) ⁽¹⁰⁾	Yes	Yes	Yes	Yes	Yes
Graphic Terminals					
PanelView™ Plus and PanelView CE terminals	Yes	Yes	Yes	Yes	Yes
PanelView standard terminals	Yes	Yes	Yes	Yes	Yes
PanelView™ e terminals	No	No	No	No	No
Message Displays					
InView™ message displays	Yes	Yes	Yes	Yes	Yes
Communication Devices					
Linking device (only ControlLogix controllers)	1788-EN2DN	1788-CN2DN 1788-CN2FF	1788-EN2DN ⁽¹¹⁾ 1788-CN2DN	—	—
PCMCIA card		1784-PCC	1784-PCD		
PCI card		1784-PCIC 1784-PCICS	1784-PCID 1784-PCIDS 1784-CPCIDS		
Drives SCANport™ module		1203-FM1 1203-FB1 ⁽¹²⁾	—		
Communication module		1203-CN ⁽¹³⁾ 1770-KFC15 1770-KFCD15 1747-KFC15	1770-KFD 1770-KFG		
Communication card		1784-PKTCS 1784-KTCS 1784-KTCX15	1784-PKTX 1784-PKTXD		
USB communication device		1784-U2CN	1784-U2DN		

(1) A non-EtherNet/IP CompactLogix controller requires a 1761-NET-ENI interface to connect to an EtherNet/IP network. This interface is only a messaging bridge.

(2) For DeviceNet access, use either a 1769-SDN scanner (control I/O and send/receive messages) or a 1761-NET-DNI interface (messaging bridge).

(3) The CompactLogix 5370 L1 controllers can't access a DeviceNet network and, therefore, can't communicate with other controllers on a DeviceNet network.

(4) The CompactLogix 5370 controllers do not have an embedded serial port. You must add external modules to communicate over an RS-232 (DF1) network.

(5) The CompactLogix 5370 controllers do not have an embedded serial port. You must add external modules to communicate over a DH-485 network.

(6) The Ethernet PLC-5 controller must be series C, firmware revision N.1 or later; series D, firmware revision E.1 or later; or series E, firmware revision D.1 or later.

(7) The 1785-ENET Ethernet communication interface module must be series A, firmware revision D or later.

(8) The PLC-5, SLC, and MicroLogix processors appear as I/O points to the Logix controller. Use the appropriate DeviceNet interface for the controller.

(9) Use a 1747-L55x controller with OS501 or later.

(10) Includes: Allen-Bradley integrated display computers with rotating media (HDD) or solid-state drives (SSD), Allen-Bradley non-display computers, and Allen-Bradley integrated display computers with keypad.

(11) The 1788-EN2DN does not support safety communication (CIP Safety™).

(12) Use a CIP™ generic MSG instruction to communicate with the 1203-FM1 SCANport module on a DIN rail that is remote to the controller. The remote DIN rail also requires a 1794-ACN15 or 1794-ACNR15 ControlNet adapter.

(13) Use the generic module configuration to configure the 1203-CN1 module and a CIP generic MSG instruction to communicate with the module.

Controller Connections

A CompactLogix system uses the connection types to establish communication links between devices:

- Controller-to-local I/O modules or local communication modules
- Controller-to-remote I/O or remote communication modules
- Controller-to-remote I/O (rack-optimized) modules
- Produced and consumed tags
- Messages
- Controller access by the programming software
- Controller access by RSLinx® Classic software for HMI or other applications

You indirectly determine the number of connections the controller uses by configuring the controller to communicate with other devices in the system. The limit of connections can ultimately reside in the communication module you use for the connection. If a message path routes through a communication module, the connection that is related to the message also counts toward the connection limit of that communication module.

CompactLogix 5370 Controller Ethernet Node Limits and Connections

- When designing a CompactLogix 5370 control system, you must consider the following:
- Maximum number of Ethernet nodes available for the project of your controller
 - Connections

The controller that you select determines the number of Ethernet nodes available.

Cat. No.	Ethernet Nodes Supported
1769-L16ER-BB1B	4
1769-L18ER-BB1B	8
1769-L18ERM-BB1B, 1769-L18ERM-BB1BK	
1769-L19ER-BB1B, 1769-L19ER-BB1BK	
1769-L24ER-QB1B	8
1769-L24ER-QBFC1B, 1769-L24ER-QBFC1BK	
1769-L27ERM-QBFC1B	16
1769-L30ER, 1769-L30ERK	
1769-L30ERM, 1769-L30ERMK	
1769-L30ER-NSE	
1769-L33ER, 1769-L33ERK	32
1769-L33ERM, 1769-L33ERMK	
1769-L33ERMO	
1769-L36ERM	48
1769-L36ERMO	
1769-L37ERM, 1769-L37ERMK	64
1769-L37ERMO ⁽¹⁾	
1769-L38ERM, 1769-L38ERMK	80
1769-L38ERMO ⁽¹⁾	

All CompactLogix 5370 controllers support 256 CIP™ connections and 120 TCP/IP connections.

1769-L23x CompactLogix Connections

The controller that you select determines the connections for I/O and messages.

Controller	Supports
1769-L23EQB1B	32 CIP connections
1769-L23EQBFC1B	8 TCP/IP connections

The total connection requirements for a 1769 CompactLogix system include both local and remote (distributed) connections. The controller supports 100 connections. The available remote connections depend on the network interface.

1769-L3x CompactLogix Connections

The controller that you select determines the connections for I/O and messages.

Controller	Supports
1769-L32C 1769-L35CR	32 CIP connections
1769-L32E, 1769-L32EK 1769-L35E	32 CIP connections 32 TCP/IP connections

The total connection requirements for a 1769 CompactLogix system include both local and remote (distributed) connections. The controller supports 100 connections. The available remote connections depend on the network interface.

1768-L4x CompactLogix Connections

The communication module that you select determines the connections for I/O and messages.

Communication Module	Supports
1768-ENBT 1768-EWEB	128 CIP connections 64 TCP/IP connections
1768-CNB 1768-CNBR	48 CIP connections

The total connection requirements for a 1768 CompactLogix system include both local and remote (distributed) connections. The controller supports 250 connections. The available remote connections depend on the network interface.

(1) Available at software version 31 and firmware revision 31.

Determine Total Connection Use

The total connection requirements for a CompactLogix system include remote (distributed) connections. The available remote connections depend on the network interface.

The controllers support these numbers of total connections:	• 1769-L23x and 1769-L3x controllers support 100 total connections. • 1768-L4x controllers support 250 total connections. • CompactLogix 5370 controllers support 256 total connections.
---	--

When designing your CompactLogix system, to estimate the number of connections per connection type and the total connections that are used, use this table or the EtherNet/IP Capacity Tool Wizard that is embedded in the [Integrated Architecture® Builder](#) (IAB) software from Rockwell Automation.

Connection Type	Device Quantity	Connections Per Device	Total Connections
Remote ControlNet communication module		0	
Configured as a direct (none) connection		1	
Remote I/O module over a ControlNet network (direct connection)		1	
Remote Ethernet communication module		0	
Configured as a direct (none) connection		1	
Configured as a rack-optimized connection			
Remote I/O module over an EtherNet/IP network (Direct connection)		1	
Remote device over a DeviceNet network (Accounted for in rack-optimized connection for local 1756-DNB module)		0	
Produced tag and first consumer		2	
Each additional consumer		1	
Consumed tag		1	
Cached message		1	
Message		1	
FactoryTalk® Linx subscriber (16 maximum)		1	
Total			

CompactLogix Controller Accessories

These accessories are compatible with the indicated CompactLogix controllers.

Memory Cards

Memory cards offer nonvolatile memory to store a user program and tag data on a controller. You can use the programming software to prompt the controller to save to or load from nonvolatile memory or you can configure the controller to load from nonvolatile memory on power-up.

IMPORTANT The 1769-L23x packaged CompactLogix controllers do not offer a nonvolatile memory option.

The CompactLogix 5370 controllers come with a 1784-SD1 Secure Digital (SD) card installed. Order a 1784-SD2 SD card separately for additional nonvolatile memory with the CompactLogix 5370 controllers.

You can use a 1784-CF128 CompactFlash card with the 1768 L4 and L3 modular CompactLogix controllers for a nonvolatile memory option. Insert the CompactFlash card into the memory card slot on the controller.

Certifications - 1784 Memory Cards

Certification ⁽¹⁾	1784-CF128, 1784-SD1, 1784-SD2
CE	European Union 2014/30/EU EMC Directive, compliant with: - EN 61000-6-4; Industrial Emissions - EN 61326-1; Meas./Control/Lab., Industrial Requirements - EN 61000-6-2; Industrial Immunity - EN 61131-2; Programmable Controllers (Clause 8, Zone A & B) European Union 2011/65/EU RoHS, compliant with: - EN IEC 63000; Technical documentation
RCM	Australian Radiocommunications Act, compliant with: AS/NZS CISPR 11; Industrial Emissions
KC	Korean Registration of Broadcasting and Communications Equipment, compliant with: Article 58-2 of Radio Waves Act, Clause 3

(1) When marked. See the Product Certification link at rok.auto/certifications for Declarations of Conformity, Certificates, and other certification details.

Environmental Specifications - 1784 Memory Cards

Attribute	1784-CF128, 1784-SD1, 1784-SD2
Temperature, operating IEC 60068-2-1 (Test Ad, Operating Cold), IEC 60068-2-2 (Test Bd, Operating Dry Heat), IEC 60068-2-14 (Test Nb, Operating Thermal Shock)	-25...+70 °C (-13...+158 °F)
Temperature, storage IEC 60068-2-1 (Test Ab, Unpackaged Nonoperating Cold), IEC 60068-2-2 (Test Bb, Unpackaged Nonoperating Dry Heat), IEC 60068-2-14 (Test Na, Unpackaged Nonoperating Thermal Shock)	-40...+85 °C (-40...+185 °F)
Relative humidity IEC 60068-2-30 (Test Db, Unpackaged Damp Heat)	5...95% noncondensing
Vibration IEC 60068-2-6 (Test Fc, Operating)	2 g @ 10...500 Hz
Shock, operating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	30 g
Shock, nonoperating IEC 60068-2-27 (Test Ea, Unpackaged Shock)	50 g

Environmental Specifications - 1784 Memory Cards

Attribute	1784-CF128, 1784-SD1, 1784-SD2
Emissions CISPR 11	Group 1, Class A
ESD immunity IEC 61000-4-2	6 kV contact discharges 8 kV air discharges
Radiated RF immunity IEC 61000-4-3	10V/m with 1 kHz sine wave 80% AM from 80...2000 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 900 MHz 10V/m with 200 Hz 50% Pulse 100% AM @ 1890 MHz 3V/m with 1 kHz sine wave 80% AM from 2000...2700 MHz

Technical Specifications - 1784-CF128, 1784-SD1, 1784-SD2

Attribute	1784-CF128	1784-SD1	1784-SD2
Memory	128 MB	1 GB	2 GB
Supported controllers	1769 modular controllers 1768 controllers	CompactLogix 5370 controllers	
Weight, approx	14.2 g (0.5 oz)	1.76 g (0.062 oz)	

1769 CompactLogix Batteries

The 1769 L23 and L3x controllers come with one 1769-BA lithium battery.

The 1768 controllers and the CompactLogix 5370 controllers do not require a battery. The controller uses internal nonvolatile memory to store its program during shutdown. Energy that is stored in the system maintains controller power long enough to store the program to internal nonvolatile memory, but not the external CompactFlash card nor SD card respectively.

Technical Specifications - 1769-BA

Attribute	1769-BA
Description	Lithium battery (0.59 g)
CompactLogix controllers	1769-L23-QBFC1B, 1769-L23E-QB1B, 1769-L23E-QBFC1B 1769-L31 1769-L32C, 1769-L35CR 1769-L32E, 1769-L35E

Removable Terminal Kits


You can order removable terminal kits separately for the CompactLogix 5370 L1 and L2 controllers.

Cat. No.	Controllers Supported	Description
1769-RTB45	CompactLogix 5370 L1	- Four 10-pin connectors are used to connect the wiring to the embedded digital I/O module of the controller. - One 5-pin connector is used to connect an external 24V DC power source to the controller.
1769-RTB40DIO	CompactLogix 5370 L2	Four 10-pin connectors are used to connect the wiring to the embedded digital I/O module of the controller.
1769-RTB40AIO	1769-L24ER-QBFC1B, 1769-L27ERM-QBFC1B	Four 10-pin connectors are used to connect the wiring to the embedded analog I/O module of the controller.

Cold Junction Compensation

The CompactLogix 5370 L2 controllers require the use of the 1769-CJC CompactLogix CJC Sensor when the embedded analog input of the controller is configured for Thermocouple mode.


Ethernet Communication Cables

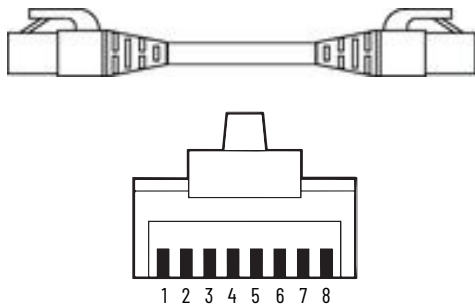

Connector Number	Color	1585J-M8xBJM-2	1585J-M4TBJM-2
1	White/Orange	TxData +	
2	Orange	TxData -	
3	White/Green	Recv Data +	
4	Blue	Unused	-
5	White/Blue	Unused	-
6	Green	Recv Data -	
7	White/Brown	Unused	-
8	Brown	Unused	-

Attribute	Value
Connector type	RJ45 Male to RJ45 Male
Connector angle	Straight-through
Length	Varies by catalog number

Serial Communication Cables

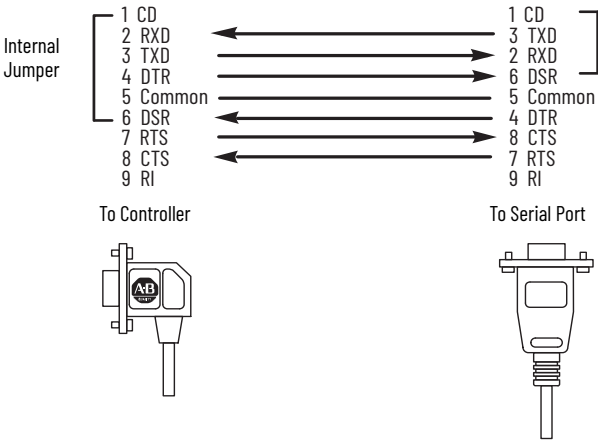

Attribute	1756-CP3	1747-CP3
Connector type	Female 9-pin D-shell	
Connector angle	Right angle connector to controller, straight to serial port	
Length	3 m (118 in.)	

Additional Resources

These documents contain additional information concerning related products from Rockwell Automation. You can view or download publications at rok.auto/literature.

Resource	Description
Replacement Guidelines: Logix 5000™ Controllers Reference Manual, publication 1756-RM100	Provides guidelines on how to replace the following: - ControlLogix® 5560/5570 controller with a ControlLogix 5580 controller - CompactLogix 5370 L3 controllers with a CompactLogix 5380 controller
CompactLogix 5370 Controllers System User Manual, publication 1769-UM021	Provides information on how to configure, operate, and monitor Armor CompactLogix and CompactLogix 5370 controllers.
Compact GuardLogix 5370 Controllers User Manual, publication 1769-UM022	Provides information on how to configure, operate, and monitor Armor Compact GuardLogix and Compact GuardLogix 5370 controllers
EtherNet/IP Network Devices User Manual, ENET-UM006	Describes how to configure and use EtherNet/IP devices to communicate on the EtherNet/IP network.
Ethernet Reference Manual, ENET-RM002	Describes basic Ethernet concepts, infrastructure components, and infrastructure features.
System Security Design Guidelines Reference Manual, SECURE-RM001	Provides guidance on how to conduct security assessments, implement Rockwell Automation products in a secure system, harden the control system, manage user access, and dispose of equipment.
UL Standards Listing for Industrial Control Products, publication CMPNTS-SR002	Assists original equipment manufacturers (OEMs) with construction of panels, to help ensure that they conform to the requirements of Underwriters Laboratories.
American Standards, Configurations, and Ratings: Introduction to Motor Circuit Design, publication IC-AT001	Provides an overview of American motor circuit design based on methods that are outlined in the NEC.
Industrial Components Preventive Maintenance, Enclosures, and Contact Ratings Specifications, publication IC-TD002	Provides a quick reference tool for Allen-Bradley industrial automation controls and assemblies.
Safety Guidelines for the Application, Installation, and Maintenance of Solid-state Control, publication SGI-1.1	Designed to harmonize with NEMA Standards Publication No. ICS 1.1-1987 and provides general guidelines for the application, installation, and maintenance of solid-state control in the form of individual devices or packaged assemblies incorporating solid-state components.
Industrial Automation Wiring and Grounding Guidelines, publication 1770-4.1	Provides general guidelines for installing a Rockwell Automation industrial system.
Integrated Architecture Builder (IAB) Advanced EtherNet/IP capacity tool	Provides EtherNet/IP network performance and Logix controller utilization estimates based on a particular system layout.
Product Certifications website, rok.auto/certifications	Provides declarations of conformity, certificates, and other certification details.

Rockwell Automation Support

Use these resources to access support information.

Technical Support Center	Find help with how-to videos, FAQs, chat, user forums, Knowledgebase, and product notification updates.	rok.auto/support
Local Technical Support Phone Numbers	Locate the telephone number for your country.	rok.auto/phonesupport
Technical Documentation Center	Quickly access and download technical specifications, installation instructions, and user manuals.	rok.auto/techdocs
Literature Library	Find installation instructions, manuals, brochures, and technical data publications.	rok.auto/literature
Product Compatibility and Download Center (PCDC)	Download firmware, associated files (such as AOP, EDS, and DTM), and access product release notes.	rok.auto/pcdc

Documentation Feedback

Your comments help us serve your documentation needs better. If you have any suggestions on how to improve our content, complete the form at rok.auto/docfeedback.

Allen-Bradley, Armor, ArmorBlock, ArmorBlock MaXum, ArmorPOINT, Compact I/O, CompactBlock Guard I/O, CompactBlock I/O, CompactBlock LDX I/O, CompactLogix, ControlLogix, DriveLogix, expanding human possibility, FactoryTalk, FactoryTalk Linx, FLEX Ex, FLEX I/O, FlexLogix, Guard I/O, GuardLogix, Integrated Architecture Builder, InView, MicroLogix, On-Machine, PanelView terminal, PanelView e, PanelView Plus, PLC-2, PLC-3, PLC-5, POINT Guard I/O, POINT I/O, POINTBus, PowerFlex, Rockwell Automation, RSLogix Classic, SCANport, SLC, and SoftLogix, are trademarks of Rockwell Automation, Inc.

CIP, CIP Safety, ControlNet, DeviceNet, and EtherNet/IP are trademarks of ODVA, Inc.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

Rockwell Automation maintains current product environmental compliance information on its website at rok.auto/pec.

Rockwell Otomasyon Ticaret A.Ş. Kar Plaza İş Merkezi E Blok Kat:6 34752, İçerenköy, İstanbul, Tel: +90 (216) 5698400 EEE Yönetmeliğine Uygundur

Connect with us.    