



► Models LP3E, LP3M, LP3P, LP3S and LP3T

StreamLine® Low Profile Strobe Light

Model LP3 is offered in five mounting configurations. The LP3S features a three-hole surface mount — ideal for control panels and other flat or flush surfaces. The LP3E features a standard A-19 medium Edison screw-in base. The LP3M features a 1/2" NPT male pipe mount and 18" wire leads. LP3P features an integrated 1/2-inch NPT pipe mount. The "T-mount" LP3T has a popular 2-hole design for wall or flush mounting.

Models LP3M, LP3S and LP3T include a surface gasket to complete the Type 4X installation. An optional dome guard is available for use with the LP3M, LP3S and LP3T when installed flush with a panel. All LP3 units feature a threaded screw-on lens to allow for tool free wiring and strobe tube replacement.

Like all StreamLine® products, the LP3 is designed with OEM applications in mind.

FEATURES

- Available in 12-48VDC, 120VAC and 240VAC; LP3E only available in 120VAC
- Edison mount (E), 1/2" NPT male pipe mount (M), Surface mount (S), T-mount (T), integrated 1/2-inch NPT pipe mount (P)
- Five lens colors: Amber, Blue, Clear, Green and Red
- Screw-on lens provides easy access
- Conformal coated PCB
- Models LP3M, LP3P and LP3S are Type 4X, IP66 enclosure
- IP69K compliant
- Models LP3E and LP3T are Type 4X, IP66 only
- PLC and triac compatible
- CSA Certified
- UL and cUL Listed

MODEL	VOLTAGE	OPERATING CURRENT	FLASH RATE/ MINUTE	LIGHT OUTPUT PEAK ¹	ECP ²
LP3*-012-048**	12-48VDC	0.44-0.10 amps	80 (+/-15)	175,000 cd	51.5 cd
LP3*-120**	120VAC	0.10 amps	80 (+/-15)	175,000 cd	51.5 cd
LP3*-240**	240VAC	0.07 amps	80 (+/-15)	175,000 cd	51.5 cd


* Indicates Mounting Style: (E) Edison A-19 Screw-in Base, (M) Male Pipe Mount, (P) Pipe Mount, (S) Surface Mount, (T) T-Mount

** Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red

¹ Peak candela is the maximum light intensity generated by a flashing light during its light pulse

² ECP (Effective Candela) is the intensity that would appear to an observer if the light were burning steadily

StreamLine® Low Profile Strobe Lights (LP3E, LP3M, LP3P, LP3S and LP3T)

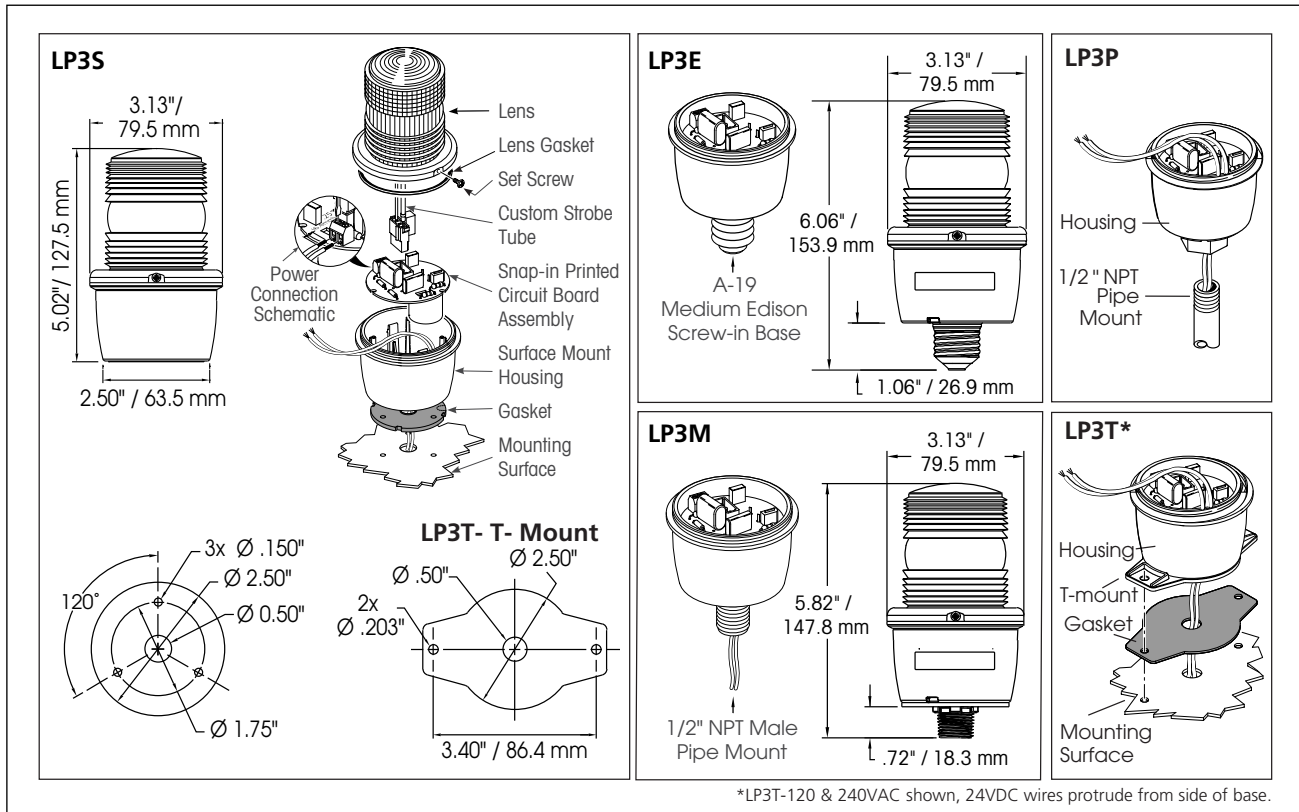

SPECIFICATIONS


Lamp Life:	4,000 Hours	
Light Source:	Strobe tube	
Operating Temperature:	-31°F to 150°F	-35°C to 66°C
Net Weight:	7.3 oz	0.21 kg
Shipping Weight:	8.5 oz	0.24 kg
Diameter:	3.13"	79.5 mm
Height:		
LP3E	6.06"	153.9 mm
LP3M	5.82"	147.8 mm
LP3P	5.82"	147.8 mm
LP3S	5.02"	127.5 mm
LP3T	5.02"	127.5 mm

REPLACEMENT PARTS

Description	Part Number
Lens, Amber	K8589063A
Lens, Blue	K8589063A-01
Lens, Clear	K8589063A-02
Lens, Green	K8589063A-03
Lens, Red	K8589063A-04
Flash Tube Assembly	K149130A
Gasket Kit ¹	K858900353A

¹ Includes gasket for LP3S and LP3T

HOW TO ORDER

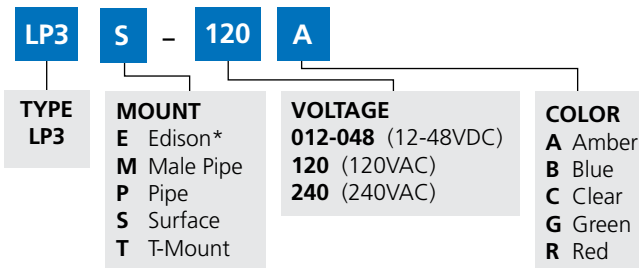

*LP3E only available in 120VAC

OPTIONAL ACCESSORIES

Description	Part Number
Wire Dome Guard for LP3M, LP3S and LP3T	LP3G

