Field Installed Accessories

UPC# 686334	MODEL	DESCRIPTION	LIST
692632	FSW5112	Summer Fan Switch	186
691109	TC1602	:DOO 0RXQWHG 6WUDWL¿FDWLRQ 7KHUPRVWDW Range - 70ºF - 140ºF	184
717755	A1600	Ceiling Mount Bracket 5-20 KW Models	120
717762	A1601	Ceiling Mount Bracket 25-50 KW Models	134

UPC# 686334	MODEL	DESCRIPTION	LIST
717793	D1602	Linear Louvered Diffuser 5-20 KW Models	401
717809	D1612	Linear Louvered Diffuser 25-50 KW Models	598
717816	D1600	Radial Louvered Cone Diffuser 5-20 KW Models	444
717823	D1610	Radial Louvered Cone Diffuser 25-50 KW Models	519
717830	D1603	Anemostat Diffuser 5-20 KW Models	401
717847	D1613	Anemostat Diffuser 25-50 KW Models	598


6HULHV &RQ¿QHG 6SDFH 3OHQXP

Features

‡ (DVLO\ ¿WV EHWZHHQ MRLVWV IRU W\S
‡ =HUR FOHDUDQFH IRU ZDOO DQG FHLO
mounting with appropriate inlet and outlet clearances.
- Bracket standard or can be mounted by 3/8" threaded rod ¿HOG VXSSOLHG
- Automatic reset thermal limit for safety
‡ 3KDVH PRGHO ZDWWDJH ¿HOG FKDQ
Watts.
- 24V control circuit on three phase models with hydraulic thermostat

Conforms to ANSI/UL 1995
&HUWL¿HG WR &$1 &6$ & 1R

Product Dimensions

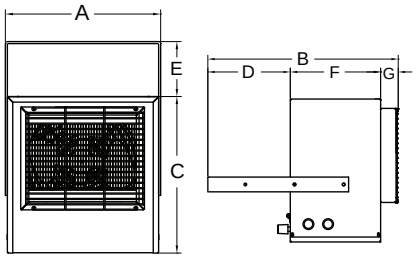

A	B	C	D	E	F	G
14.4"	19.4"	14.5"	8.4"	5.1"	9.2"	1.8"

Standard Models

UPC# 686334	MODEL	WATTS	BTU's	VOLTS	PHASE	AMPS	TEMP RISE	AIR THROW	CFM	WT. (LBS.)	LIST
726245	HF5705T	5000	17065	240	1	21	57 ºF	16'	275	32	772
		4165	14215			17	48 ºF				
		3332	11365			14	38 ºF				
		2500	8533			10	29 ºF				
		3750	12798	208	1	18	43 ºF	16'	275	32	
		3123	10659			15	36 ºF				
		2500	8553			12	29 ºF				
		1874	6396			9	21 ºF				
727252	H3H5705T	3750	12799	208	3	10.4	57 ºF	16'	375	32	832
		5000	17065	240	3	12	57 ºF	16'	275	32	
726269	P3P5705T	5000	17065	480	3	6	57 ºF	16'	275	32	
707367	DCS-MT303	Optional Field Installed Disconnect Switch, 30 Amp @ 600Volts									63
		)RU 9 FRQWURO RQ VLQJOH SKDVH PRGHOV GHOHWH 7									146