

**IEC Pin and Sleeve**  
**32A, 220-240V, 2 Pole, 3 Wire**  
**Watertight Inlet**

# HUBBELL

## Features

- Solid one-piece pins for reliable electrical contact
- Super tough insulated non-metallic housing
- Raised collar surrounds each phase pin to prevent electrical tracking

## Ordering Information

<b>Description</b> Watertight IEC Pin and Sleeve Inlet	<b>UPC</b> 783585403656	<b>Catalog Number</b> HBL332B6W
---	----------------------------	------------------------------------

**Device Color**  
Blue

## Standards

UL Listed, File E146032  
CSA Certified File LR280C  
UL Classified to IEC 60309-1 IEC 60309-2

## Specifications

Housing	Zytel® 101 Nylon
Locking Ring	Reinforced Thermoplastic Polyester
Mounting Flange	Zytel® 101 Nylon
Contact Carrier	High-Impact Thermoset
Gaskets	Solid Neoprene

## Performance


<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstand 3000V AC
Max. Working Voltage	600V RMS
<b>Mechanical</b>	
Cord Grip Retention	Per CSA C22.2 No.182.1 /UL1682
Product Identification	Identification and ratings are a permanent part of the device housing
Terminal Identification	Terminals identified in accordance with North American and IEC conventions
<b>Environmental</b>	
Flammability	HB or better per UL 94 or CSA C22.2 No. 0.17
Ingress Protection	IP67 Suitability
Moisture Resistance	Watertight per IEC 60309-1.
Operating Temperatures	Maximum Continuous 75°C; Minimum - 40°C w/o impact

## Accessories

Closure Cap  
Cord Clamp and Locking Ring  
Back Boxes

## Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

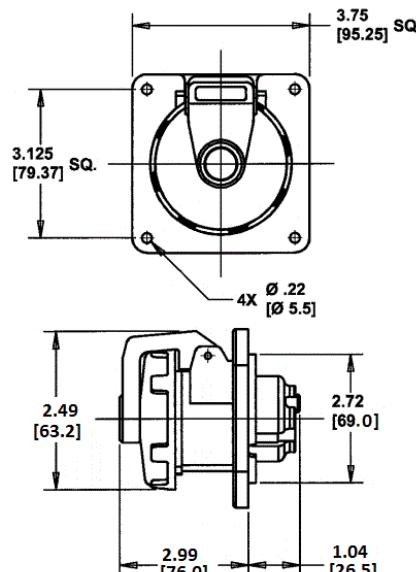

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.