

Preheat T8

F15T8/D 25PK

Philips leads the industry with the lowest level mercury technology. Reducing the mercury level (source reduction) during the manufacturing phase is essential to creating products that are less harmful to the environment.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Features	ALTO® (ALTO)
Life to 50% Failures (Nom)	13,000 hour(s)

Light Technical	
Color Code	54-765
Luminous Flux	725 lm
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6200 K
Color rendering index (CRI)	75

Operating and Electrical	
Power Consumption	15 W
Lamp Current (Nom)	0.335 A
Wattage Equivalent	15 W
Voltage (Nom)	55 V

Controls and Dimming	
Dimmable	Yes


Mechanical and Housing	
Bulb Shape	T8

Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg

Product Data	
Order product name	F15T8/D 25PK
Full product name	F15T8/D 25PK
Order code	928022805425
Material Nr. (12NC)	928022805425
Numerator - Quantity Per Pack	1
Net Weight (Piece)	59.600 g
EAN/UPC - Product/Case	046677378233
Numerator - Packs per outer box	25
EAN/UPC - Case	50046677407204


Preheat T8

Dimensional drawing

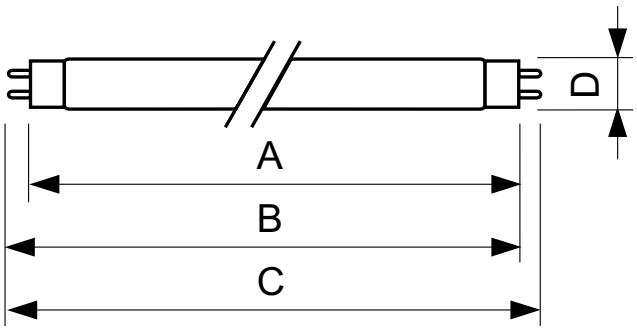


Product	D (max)	A (max)	B (max)	B (min)	C (max)
F15T8/D 25PK	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

Photometric data

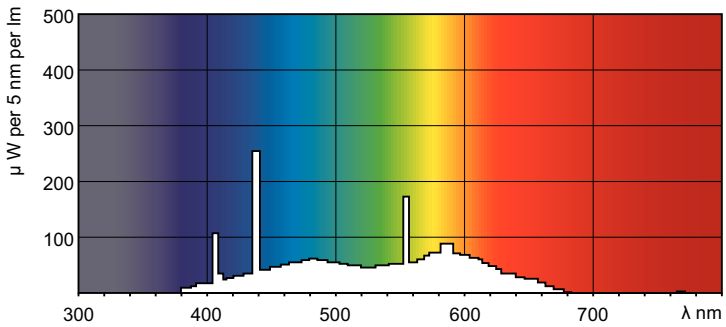


Spectral Power Distribution Colour - F15T8/D 25PK

Lifetime

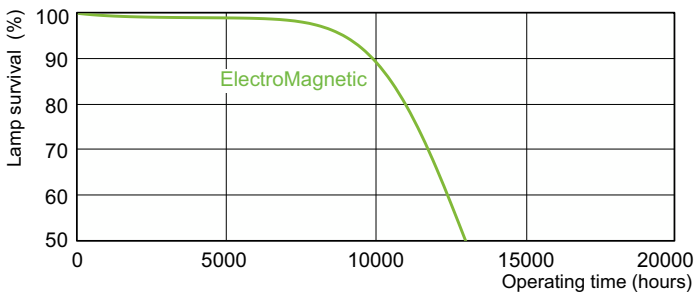


Life expectancy diagram - 3 hour cycle

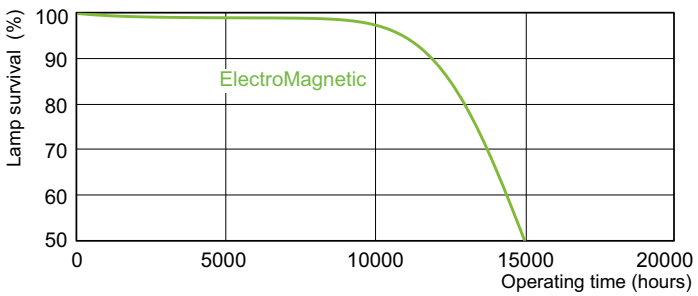

Life expectancy diagram - 12 hour cycle

Preheat T8

Lifetime

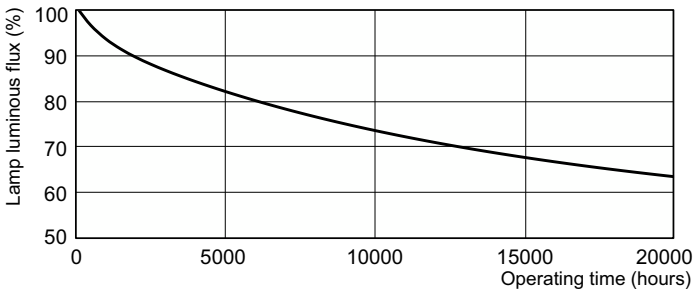

Lumen Maintenance Diagram - F15T8/D 25PK

© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.