


Cam Track® Conduit Benders for 2-1/2" to 4" EMT, IMC and Rigid

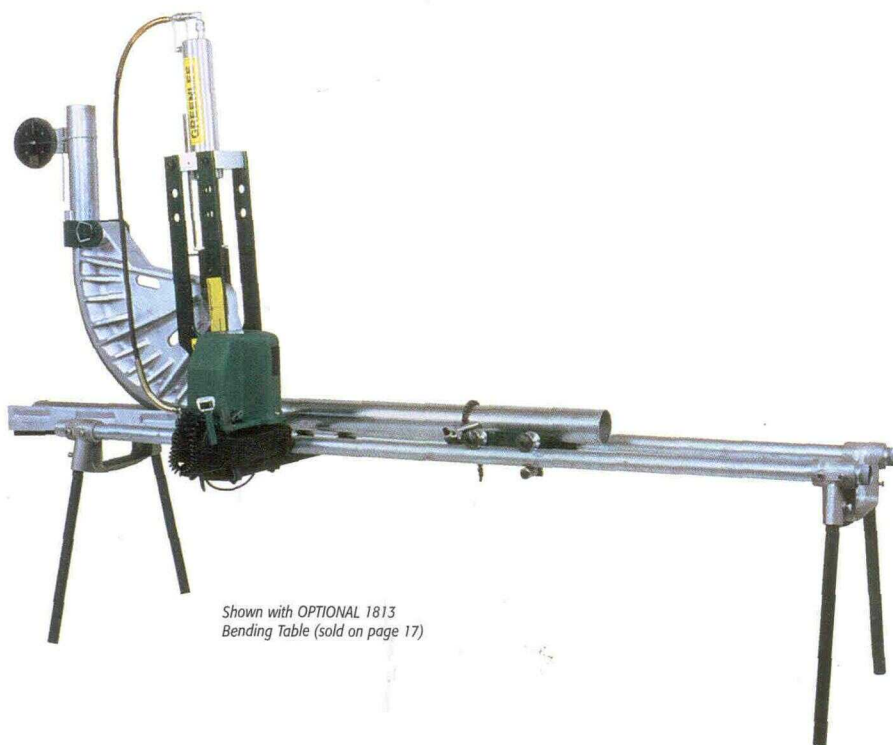

Shown with OPTIONAL 1813
Bending Table (sold on page 17)

Cat. No.	UPC No.	Description
881CT	31287	Cam Track® Conduit Bender for One Shot 90° Bends in 2-1/2", 3", 3-1/2" and 4" EMT, IMC and Rigid conduit, without hydraulic pump
881CT-E980	34208	Cam Track® Conduit Bender for One Shot 90° Bends in 2-1/2", 3", 3-1/2" and 4" EMT, IMC and Rigid conduit, with 980 Electric Hydraulic Pump
881CTD	38466	Cam Track® Conduit Bender for One Shot 90° Bends in 2-1/2", 3" and 4" EMT, IMC and Rigid conduit, without hydraulic pump
881CTD-E980	38467	Cam Track® Conduit Bender for One Shot 90° Bends in 2-1/2", 3" and 4" EMT, IMC and Rigid conduit, with 980 Electric Hydraulic Pump
881	27778	Conduit Bender for One Shot 90° Bends in 2-1/2" and 3", Two Shot 90° Bends in 3-1/2" and 4" EMT, IMC and Rigid conduit, without hydraulic pump
881-E980	34205	Hydraulic Conduit Bender for One Shot 90° Bends in 2-1/2" and 3", Two Shot 90° Bends in 3-1/2" and 4" EMT, IMC and Rigid conduit, with 980 Electric Hydraulic Pump
881 BASIC	35711	Conduit Bender without shoe groups or hydraulic pump
27554	27554	2-1/2" – One Shot 90° EMT, IMC, Rigid Shoe Group
27555	27555	3" – One Shot 90° EMT, IMC, Rigid Shoe Group
31281	31281	3-1/2" – One Shot 90° EMT, IMC, Rigid Shoe Group
27556	27556	3-1/2" – 45° EMT, IMC, Rigid Shoe Group (requires 2 bends to make a 90°)
31274	31274	4" – One Shot 90° EMT, IMC, Rigid Shoe Group
27557	27557	4" – 45° EMT, IMC, Rigid Shoe Group (requires 2 bends to make a 90°)
1813	28901	Bending Table for 881 Series Bender
881A	27553	Converts 884 or 885 to an 881

- One bender to bend EMT, IMC and Rigid Conduit.
- Fast and easy set-up on the jobsite.
- True one shot 90° bends with CT models for quick accurate bends.
- Steel reinforced follow bars for long life.
- Bend a 90° elbow in 4" Rigid conduit in 95 seconds.
- Optional 1813 Bending Table and accessories for easier operation.
- Patented.

SPECIFICATIONS

Capacity:	Weight:
2-1/2" – 4" EMT, IMC and Rigid	881CT-E980: 999 lbs. (454 kg)
Power Source:	881-E980: 930 lbs. (422 kg)
980: 120 VAC Electric Powered Hydraulic Pump	881: 856 lbs. (388 kg)
980-22PS: 220 VAC 50/60 Cycle Electric Powered Hydraulic Pump	881 BASIC: 358 lbs. (163 kg)
	27555: 137 lbs. (62 kg)
	27556: 130 lbs. (59 kg)
	27557: 134 lbs. (61 kg)
	31274: 183 lbs. (83 kg)

CAM TRACK® BENDER CENTERLINE BENDING RADII FOR EMT, IMC AND RIGID CONDUIT

SIZE	881	881 CT, 881 CTD, 881 BASIC	Shoe Group	Degree of Bend
	Centerline Radius	Centerline Radius		
2-1/2"	13-1/2" (342.9 mm)	13-1/2" (342.9 mm)	27554	90
3"	16" (406.4 mm)	16" (406.4 mm)	27555	90
3-1/2"	18-5/8" (473.1 mm)	18-5/8" (473.1 mm)	31281	90
4"	21" (533.4 mm)	20-7/8" (530.2 mm)	31274	90
3-1/2"		18-5/8" (473.1 mm)#	27556	45
4"		21" (533.4 mm)#	27557	45
		# 881 Basic Only		