



# OVWP LED LED Wall Sconce



Catalog  
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The OVWP luminaire is compact and energy efficient, great for replacing up to 70W MH while saving 85% in energy costs. A photocell built into this luminaire makes the OVWP great for Dusk to Dawn operation, in residential single and multi-family applications.


## Specifications

**Width:** 2-3/8"  
(6 cm)

**Height:** 8-7/8"  
(22.5 cm)

**Depth:** 5-5/16"  
(13.5 cm)

**Weight:** 1.5 lbs  
(0.68 kg)

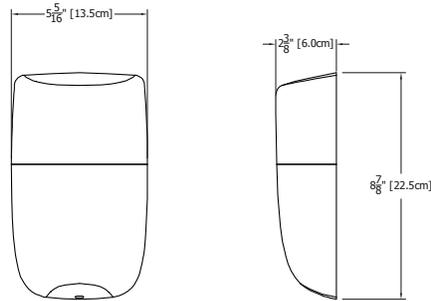

All dimensions are inches (centimeters) unless otherwise indicated.

## Ordering Information

**EXAMPLE:** OVWP LED 40K 120 PE DDB

OVWP LED						
Series	Color Temperature		Voltage		Control Options	Finish
OVWP LED	40K	4000K <sup>1</sup>	120	120V	PE Photoelectric cell, button type	DDB Dark Bronze

### NOTES

<sup>1</sup> Corrected color temperature (CCT) shown is nominal per ANSI C78, 377-2008.

## FEATURES & SPECIFICATIONS

### INTENDED USE

This product is for residential applications. The OVWP provides years of maintenance-free general illumination for commercial or residential outdoor applications such as driveways, patios, loading areas and warehouses.

### CONSTRUCTION

Rugged cast-aluminum, corrosion-resistant rear mounting plate. Impact resistant polycarbonate front cover/diffuser resists fading and cracking. Driver operates at 120V. Operating temperature -40°C to 40°C. Lenses are engineered for uniform light distribution, uniformity and fixture spacing. See Lighting Facts Labels for specific fixture performance.

### FINISH

Available in dark bronze and white.

### ELECTRICAL

Light engine consists of long-life, high-efficacy LEDs mounted on an internal aluminum heat sink to maximize heat dissipation and promote long life (L95/100,000 hours at 40°C). Driver and integral photocell operate at 120V and are fully enclosed in the upper housing. There are no user serviceable parts. LEDs maintain 70% of light output at 35,000 hours of service. (LED lifespan based on IESNA LM-80-08 results and calculated per IESNA TM-21-11 methodology.)

### INSTALLATION

Designed for wall mount applications more than 4' above the ground. Mounts to a recessed junction box (by others).

### LISTINGS

ETL Listed to US and Canadian safety standards for wet locations.

### WARRANTY

1-year limited warranty. Complete warranty terms located at:  
[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications are subject to change without notice.



RESIDENTIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2013-2020 Acuity Brands Lighting, Inc. All rights reserved.

## LEGEND

- 0.2 fc
- 0.5 fc
- 1.0 fc
- 2.0 fc

## OVWP LED 40K 120 PE DDB

