

Features

- Stainless steel mesh is corrosion resistant
- Multiweave grip gives cable arc-of-bend control
- Endless weave provides easy cable/flexible conduit installation

**Ordering Information**

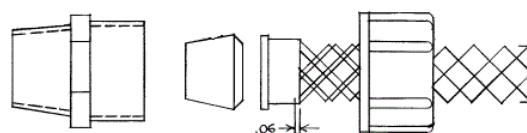
Description	Form Size	Cable	UPC	Catalog Number
Straight Male Thread, F6 Stainless Steel Mesh, Liquidtight		1.250"-1.375"	783585330860 (3.17-3.49)	074011258

Listings

UL Listed
CSA Certified

Specifications

Strand	Stainless Steel
Body	Aluminum

**Performance****Environmental**

Flammability	UL 94HB (Strand grip), UL 94V-2(Fitting)
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C
Operating Temperatures	-30°F to +240°F (-34°C to +115°C)
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting

Related Products

Metal Clad Sealing O-Ring 20509006

Online Resources

Customer Sales Drawings
eCatalog
Installation Instructions