

IEC Pin and Sleeve

60A, 3 Phase, 240V, 3 Pole, 4 Wire

## Unfused Circuit-Lock® Reverse Service Mating Plug

### Features

- On piece brass contact sleeves.
- Sequential contact engagement to prevent a momentary over-voltage on components
- Super tough insulated non metallic house for impact and chemical resistance

# HUBBELL

### Ordering Information

Description	UPC	Catalog Number
Watertight IEC Pin and Sleeve Mating Plug- Reversed Service	783585012759	HBL460P9WR

Device Color  
Blue




### Standards

UL Listed, File E146032  
CSA Standard C22.2 No. 182.1  
UL Classified to IEC60309-1

### Specifications

Housing	Zytel® ST801 Nylon
Locking Ring	Reinforced Thermoplastic Polyester
Contact Carrier	High-Impact Thermoset
Terminal Screws	Stainless Steel
Retainer	High-Impact Thermoset

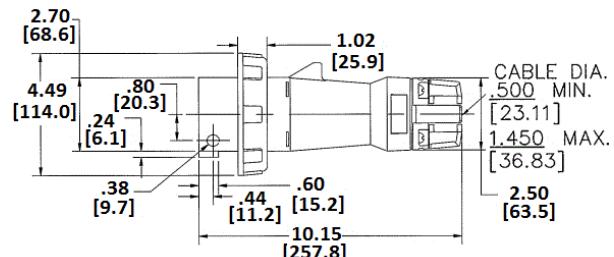

### Performance

#### Electrical

Current Interrupting Certified for current interrupting at full rated current

Dielectric Voltage Withstands 3,000V AC Min  
Max. Working Voltage 600V AC RMS

#### Mechanical

Impact Resistance Per CSA C22.2 No. 182.1 / UL1682  
Product Identification Identification and ratings are a permanent part of the device housing.  
Terminal Identification Terminals identified in accordance with North American and IEC conventions

#### Environmental

Flammability HB or Better per UL 94 or CSA C22.2 No. 0.17  
Ingress Protection IP67 Suitability  
Moisture Resistance Watertight per IEC 60309-1  
Operating Temperature Maximum Continuous 75°C; Minimum - 40°C w/o impact

### Online Resources

Customer Use Drawing  
eCatalog  
Installation Instructions

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

