PatchLink™ Horizontal Cable Managers

PANDUIT®
SPECIFICATION SHEET

SPECIFICATIONS

Horizontal cable managers shall be capable of managing cables on the front and rear of any 19 in. EIA rack. The manager shall consist of a 1-piece construction that is molded out of plastic. Horizontal managers shall have pass through holes that incorporate integral bend radius control as well as fingers with rounded edges. The manager shall have rigid end fingers that incorporate integral bend radius control. Hinged covers shall allow access to the cable pathway without having to completely remove the cover from the manager.



TECHNICAL INFORMATION

Attributes:	Part Number	RU	Height in. (mm)	Width in. (mm)	Depth in. (mm)
	WMP1E	2	3.5 (88)	19.0 (483)	8.9 (225)
	WMPF1E				3.7 (94)
	WMPH2E				8.9 (225)
	WMPHF2E				3.7 (94)
	WMPSE	1	1.7 (44)		8.9 (225)
	WMPFSE				3.7 (94)
	WMPLSE				7.9 (200)
	WMPLFSE				2.7 (69)
Temperature rating:	Max storage temperature: 149°F (65°C) Max operating temperature: 140°F (60°C)				
Packaging:	Cable managers include hinged cover(s), mounting hardware				

KEY FEATURES AND BENEFITS

Standards met:	UL 2416, CSA C22.2
Integral bend radius control:	Maintains bend radii as cables transition to and from horizontal and vertical pathway
Dual hinged cover:	Opens upward or downward to provide easy access to cables in horizontal pathway without having to completely remove cover
Increased finger spacing:	Provides larger area for high performance Category 6 cables
One piece, plastic construction:	Provides durability and easy installation
Rounded edges on fingers:	Protect cables from snags and damage to cable
Cable pass through holes:	Provide ease of installation and cable maintenance

PatchLink Horizontal Cable 2 RU Managers	
Front and rear, with bend radius clips:	**WMPH2E**
Front and rear:	**WMP1E**
Front only, with bend radius clips:	**WMPHF2E**
Front only:	**WMPF1E**
PatchLink Horizontal Cable 1 RU Managers	
Front and rear:	**WMPSE**
Front and rear, short depth:	**WMPLSE**
Front only:	**WMPFSE**
Front only, short depth:	**WMPLFSE**
Rack Systems	
2-Post rack with threaded rails, 3 in. deep:	**R2P^+**
4-Post rack with #12-24 threaded rails:	**R4P**^+**
Panel Extender Brackets	
Brackets:	**PEB^^**
Radius control clip:	**CMBRC1**
Replacement Cover	
WMPH2E Replacement Cover Kit:	**WMPH2E-KIT**

**Depth other than 30 in.: 23, 36, 42
^Height, in.: 79, 96
^^RU: 1 or 2
+Color: WH (White)

TAA Compliant

All listed part numbers are compliant with the U.S. Trade Agreements Act (TAA) for purchases shipped to customers in the United States.

PatchLink™ Horizontal Cable Managers

APPLICATIONS

PatchLink Horizontal Cable Managers provide a neat and efficient way to manage patch cables on any EIA 19 in. rack. They can be used in multimedia applications to manage copper, fiber optic, and coax cables. Flexible fingers organize the patch cords simplifying moves, adds, and changes while the integral bend radius control and closed design protects the patch cables in the pathway. All of these features combine to provide the user with a horizontal cable management solution that simplifies cable routing in a finished, professional appearance. When used with the Mini-Com® patch panels, patch cords, vertical cable managers, and racks, the user receives a total system that satisfies functional and aesthetic requirements for telecommunications rooms.

Part Number	Front					Rear				
	Channel Area (in.²)	Cat. 6A (28 AWG - 0.185 in.)	Cat. 6A (24 AWG - 0.275 in.)	Cat. 6 (28 AWG - 0.150 in.)	Cat. 6 (24 AWG - 0.235 in.	Channel Area (in.²)	Cat. 6A (28 AWG - 0.185 in.)	Cat. 6A (24 AWG - 0.275 in.)	Cat. 6 (28 AWG - 0.150 in.)	Cat. 6 (24 AWG - 0.235 in.)
WMP1E	6.8	101	45	153	62	9.1	134	60	204	83
WMPF1E						–	–	–	–	–
WMPH2E						9.1	134	60	204	83
WMPHF2E						–	–	–	–	–
WMPSE	2.7	40	18	61	25	4.6	68	30	104	42
WMPFSE						–	–	–	–	–
WMPLSE	1.7	25	11	38	15	4.6	68	30	104	42
WMPLFSE						–	–	–	–	–

ENGINEERING DRAWINGS

1 **R2P** – 19 in. Standard EIA Rack 19 in. x 3 in., 45 RU

PatchRunner™ 2 Vertical Cable Managers and Doors

2a **PR2VD06** – 6 in. wide

2b **PR2VD08** – 8 in. wide

2c **PR2VD12** – 12 in. wide

Angled Modular Patch Panels

3a **CPPLA48WBLY** – 2 RU, 48-Port

3b **CPPA48HDWBLY** – 1 RU, High Density 48-Port


Cable Management Accessories

4 **PR2HF4** – Cable Manager, 4 RU

5 **CMT4** – Trough, 4 RU

6 **PR2VEP** – End Panel

7 **PR2VWF** – Waterfall

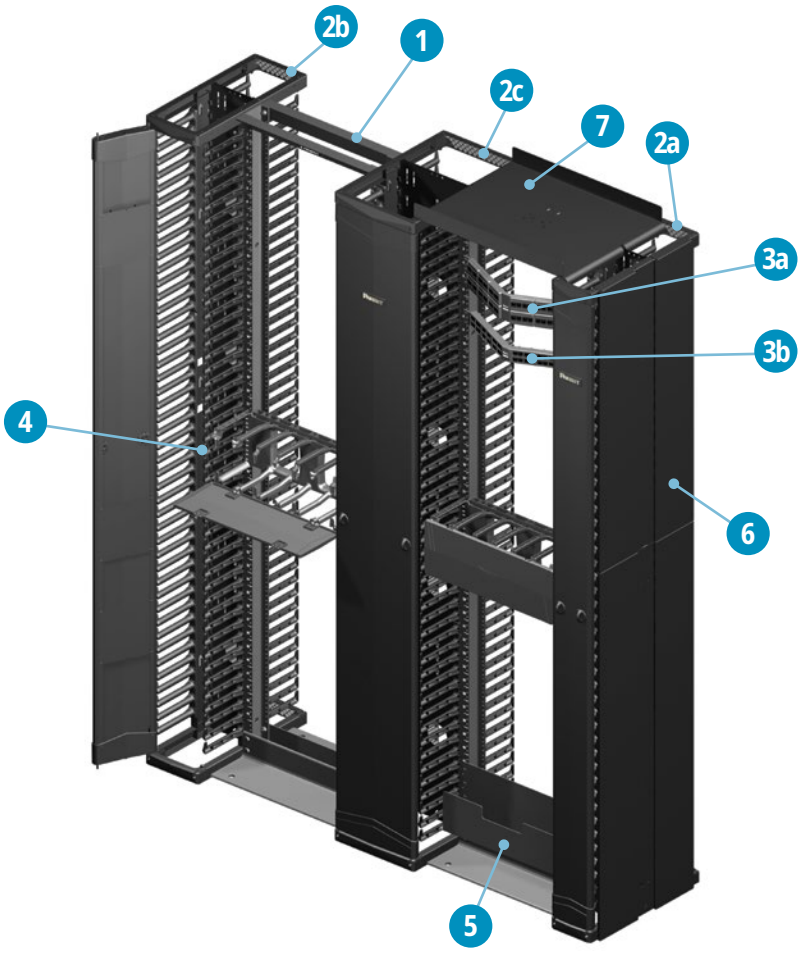

©2025 Panduit Corp. ALL RIGHTS RESERVED. RKSP154-WW-ENG 8/2025