

Kellems® Wire Management Products
PG and Metric Threaded Deluxe Cord Grips
Deluxe Cord Grips

HUBBELL

Features

- Aluminum Fitting
- Stainless steel mesh is corrosion resistant
- Neoprene bushing is oil and watertight

Ordering Information

Description	Hub Size	UPC	Catalog Number
Straight	PG29	783585327785	074PG29025
Panzergewinde Male Thread, Liquidtight			




Listings

UL Listed
CSA Certified

Specifications

Strand	Galvanized Steel
Body	Aluminum
Nut	Aluminum
Bushing	Neoprene

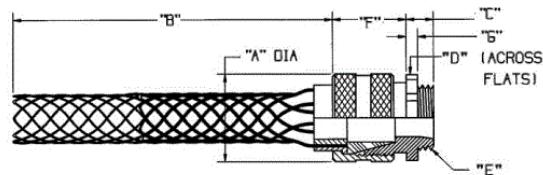

Performance

Environmental

Flammability	UL 94HB (Strand grip), UL 94V-2 (Fitting)
Hazardous Locations	Suitable for use in hazardous locations per Class I Div. 2, Class II Div. 1 & 2, Class III Div. 1 & 2 N.E.C
Operating Temperatures	-30°F to +240°F (-34°C to +115°C)
Wet Locations	Suitable for use in wet locations when used with a listed sealing ring between box and fitting

Online Resources

[Customer Use Drawing](#)
[eCatalog](#)
[Installation Instructions](#)

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

