

Switches and Lighting Controls

15A 120/277V AC, Illuminated Single Pole

Decorator Switch

HUBBELL

Features

- Smooth, quiet rocker
- Self-grounding feature is standard
- Ultrasonically welded cover and base
- Residential Grade

Ordering Information

UPC Catalog Number
883778101175 RSD115ILI

Listings


CSA Certified
Listed to UL Standard 20

Performance

Electrical
Dielectric voltage Withstands 1,500V AC minimum for 1 minute
Endurance 30,000 cycles minimum
Max. working voltage 120V
Overload 1.5 times rating

Mechanical
Terminal accommodation Back and side wire: #14 AWG min. - #12 AWG
max. solid and stranded copper wire only; push
wire: #14 AWG solid copper wire only

Environmental
Flammability UL V-0
Operating Temperatures Maximum continuous 60°C; minimum -20°C
(without impact)

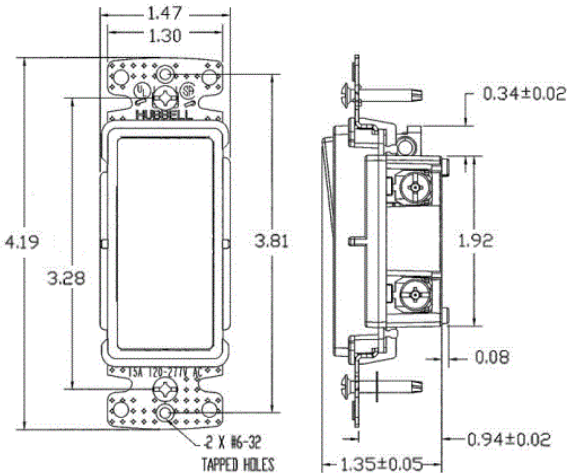

Online Resources

Customer Sales Drawings
eCatalog
Installation Instructions

