

## Adjustable Cable Lockout

- Infinitely adjustable safety hasp and cable
- Ideal for multiple circuit breaker panels and side-by-side gate valve lockouts
- Feed the cable end through the points to be locked out, then back through the lockout body. Cinch it tight to remove any slack with the patented locking feature
- Tough, flexible multi-stranded 6 ft. 1/4" dia. with a clear vinyl coating
- Tough, lightweight, dielectric Xenoy® thermoplastic body withstands chemicals; performs effectively in extreme conditions
- Up to four workers can apply their personal safety locks
- Complete with high-visibility, re-usable, write-on safety labels (English, French & Spanish). Identify the responsible person, then erase for the next job.



| Description              | Cat. No.      |
|--------------------------|---------------|
| Adjustable Cable Lockout | <b>44-808</b> |

## Cable Lockout

- 44-829 Unique hasp lockout device accepts up to six 9/32 in. padlocks and comes with a 6 ft. plastic-coated steel cable



| Description                | Cat. No.      |
|----------------------------|---------------|
| Cable Lockout, 6 ft. cable | <b>44-829</b> |

## Gate Valve Lockouts


- Unique patent pending rotating design allows for easier installation in confined space applications
- Each size rotates into itself and nests within the next larger size to save space in storage
- Up to four workers can apply their personal safety locks
- Complete with high-visibility permanent safety labels (English, French & Spanish) that can be written on to identify the responsible person, then erased for the next job
- Tough, lightweight, dielectric Xenoy thermoplastic bodies withstand chemicals and perform effectively in extreme conditions, temperature range: -50°F (-46°C) to +350°F (177°C)



| Valve Size                          | Qty. | Cat. No.      |
|-------------------------------------|------|---------------|
| 1 in. to 3 in.                      | 1    | <b>44-824</b> |
| 2 in. to 5 in.                      | 1    | <b>44-825</b> |
| Set of five sizes (1 in. to 13 in.) | —    | <b>44-817</b> |

## Ball Valve Lockout Devices

- Best available method for locking out ball valves
- Patented design fits most major brand ball valves
- Designed to lock in off position only
- Complies with OSHA lockout standard

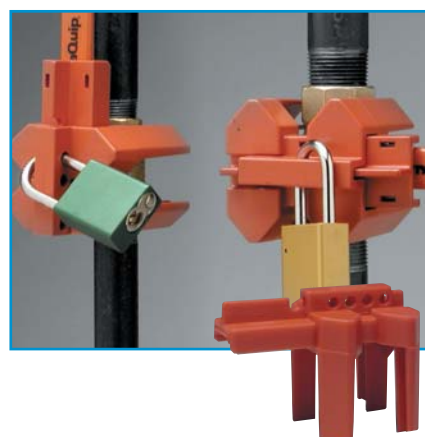

| Valve Size (In.)       | Max. Shackle Length | Material      | Cat. No.      |
|------------------------|---------------------|---------------|---------------|
| 1/2 to 1-1/4           | —                   | Polypropylene | <b>44-846</b> |
| 1-1/4 to 3             | —                   | Polypropylene | <b>44-847</b> |
| 1/4 to 1 (not shown)   | 9/32                | Nylon         | <b>44-820</b> |
| 1-1/4 to 3 (not shown) | 9/32                | Heavy steel   | <b>44-821</b> |