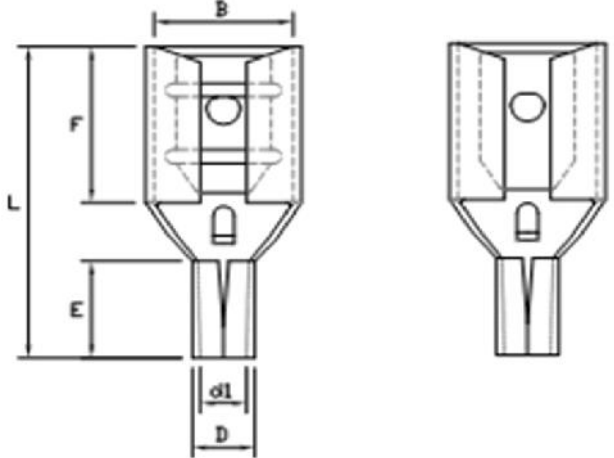


## Uninsulated Female Disconnects

|                                                                                   |            |                 |                       |  |        |        |        |        |        |
|-----------------------------------------------------------------------------------|------------|-----------------|-----------------------|-------------------------------------------------------------------------------------|--------|--------|--------|--------|--------|
| Drawn - SD                                                                        |            |                 |                       |                                                                                     |        |        |        |        |        |
| Approved - KM                                                                     |            |                 |                       |                                                                                     |        |        |        |        |        |
| Material - Brass / Nylon Insulation                                               |            |                 |                       |                                                                                     |        |        |        |        |        |
| Title - Uninsulated Female Disconnects                                            |            |                 |                       |                                                                                     |        |        |        |        |        |
|  |            |                 |                       |                                                                                     |        |        |        |        |        |
| Part Number                                                                       | Wire Range | Insulated Color | Electrical Rating Max | B                                                                                   | F      | L      | E      | d1     | D      |
| F22-250-3                                                                         | 22-18 AWG  | RED             | 105C / 600V           | 0.2598                                                                              | 0.3110 | 0.6299 | 0.1968 | 0.0669 | 0.1062 |
| F16-110-3                                                                         | 16-14 AWG  | BLUE            | 105C / 600V           | 0.1259                                                                              | 0.2519 | 0.5314 | 0.1968 | 0.0905 | 0.1299 |
| F16-250-3                                                                         | 16-14 AWG  | BLUE            | 105C / 600V           | 0.2598                                                                              | 0.3110 | 0.6299 | 0.1968 | 0.0905 | 0.1299 |
| F12-250-3                                                                         | 12-10 AWG  | YELLOW          | 105C / 600V           | 0.2598                                                                              | 0.3110 | 0.6692 | 0.2362 | 0.1338 | 0.1771 |