

Catalog Number
Notes
Type

FEATURES & SPECIFICATIONS

INTENDED USE

Track sections are used for surface or pendant-mounted individually or joined to form continuous rows.

CONSTRUCTION

Low-profile, heavy-gauge, extruded aluminum channel for maximum rigidity, available in white or black finishes.

Lithonia Commercial track sections and connectors are designed to consider dimensional restrictions of T-bar grid ceilings.

Track sections not intended for wall mounting. Ceiling mount only (not recommended for sloped ceiling applications).

ELECTRICAL SYSTEM

1-Circuit: One 20-amp circuit. #12 gauge copper conductors are co-extruded in PVC insulator.

Visible polarity line indicates proper electrical connection and mechanical alignment.

Live end or feed connector required to power track. (See Connectors and Accessories Tab.)

LISTING

UL listed to U.S. and Canadian safety standards.

WARRANTY

One-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.


Note: Specifications subject to change without notice.

Commercial Track Lighting

LT TRACK STICKS

ONE-CIRCUIT COMMERCIAL TRACK

1-Circuit:

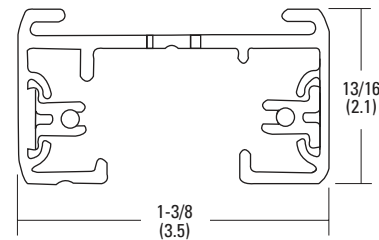

All dimensions are inches (centimeters).

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LT4 WH

Series	Finish
<u>1-Circuit track sticks</u>	
LT4 4-foot track section; actual length 44" (111.8 cm)	WH White
LT8 8-foot track section; actual length 92" (233.7 cm)	DBL Black
LT12 12-foot track section; actual length 140" (355.6 cm)	



Accessories: Order as separate catalog number.

For Commercial Track accessories, refer to [ACSY-1C](#).

TRACK STICKS

1-CIRCUIT COMMERCIAL TRACK STICKS

Optional Layouts

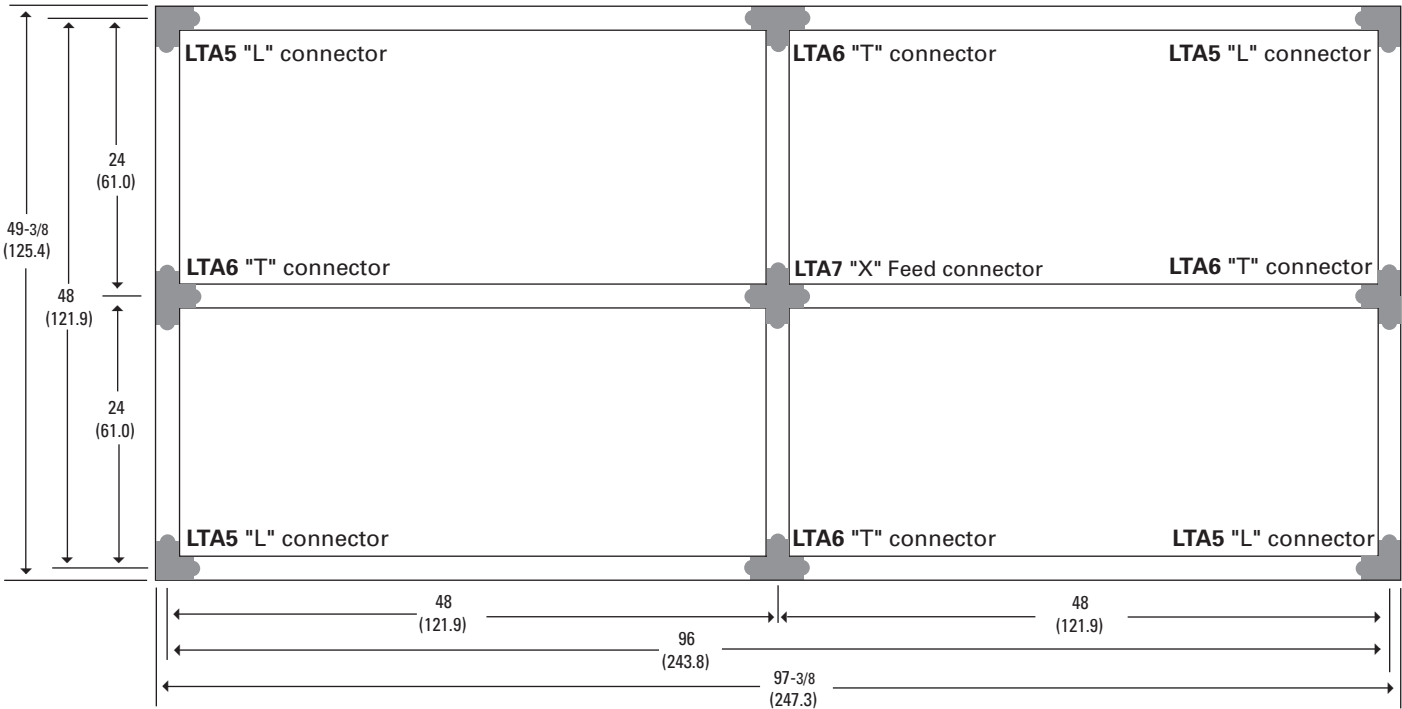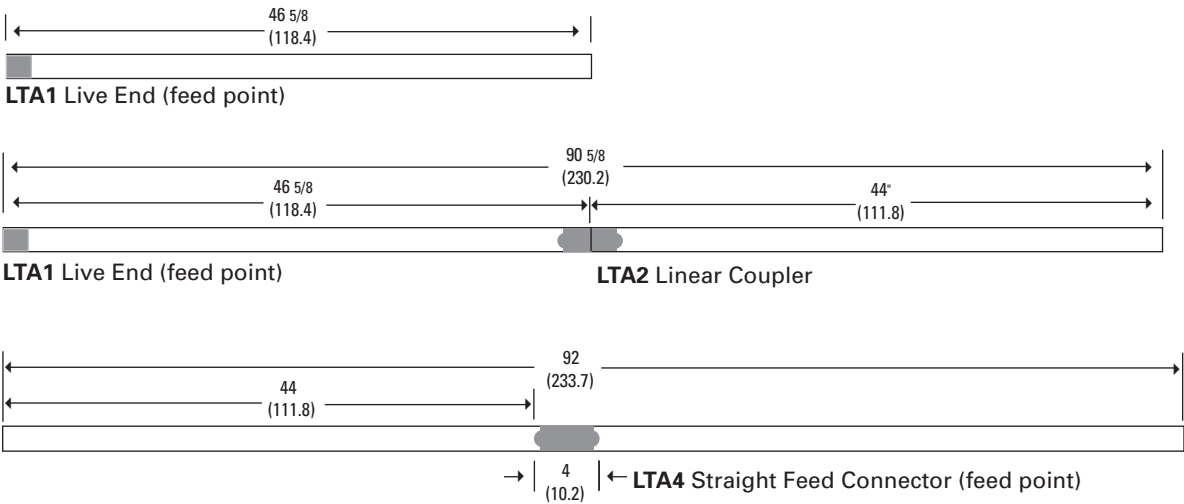

NOTES:

1 Dimensions and specifications are based on the most current available data and are subject to change without notice. All dimensions are inches (centimeters).